

13790510059

5



4

3




2

1

0.80±0.05 0.20±0.05

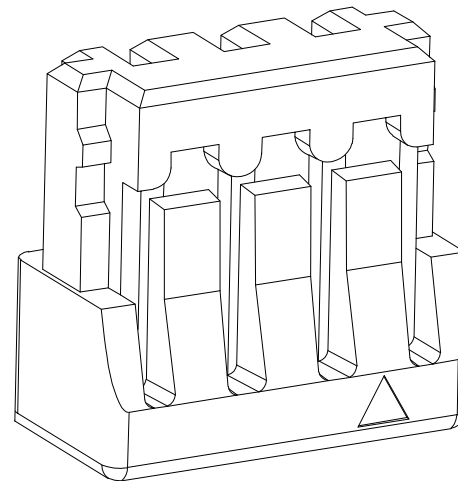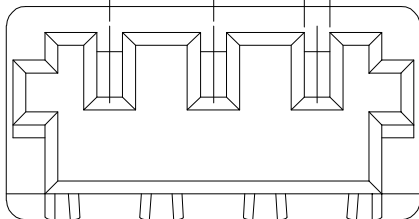

Dimensional Ordering Information:			
Circuits Part NO	Dimensions		
	A	B	C
2P	2.40	2.30	0.80
3P	3.20	3.10	1.60
4P	4.00	3.90	2.40
5P	4.80	4.70	3.20
6P	5.60	5.50	4.00
7P	6.40	6.30	4.80
8P	7.20	7.10	5.60
9P	8.00	7.90	6.40
10P	8.80	8.70	7.20
11P	9.60	9.50	8.00
12P	10.40	10.30	8.80
13P	11.20	11.10	9.60
14P	12.00	11.90	10.40
15P	12.80	12.70	11.20
16P	13.60	13.50	12.00

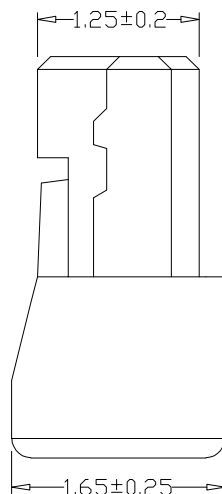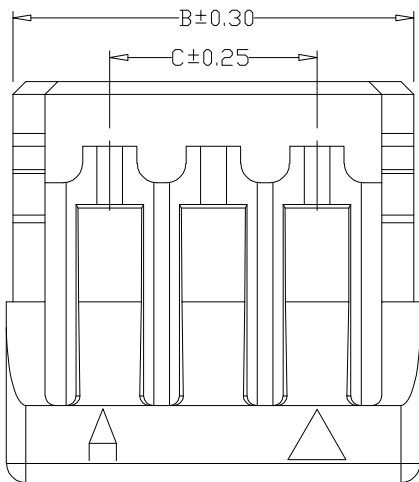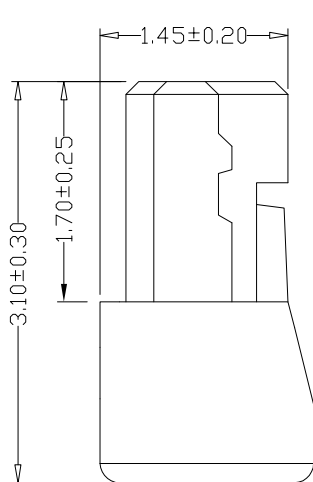

EST0800 H - 1 * NP X - B - X

↑ ↑ ↑ ↑ ↑

羿通代码+ 间距 1示意单排 2示意双排 PIN数 X本色 B黑色 R红色 L蓝色 Y黄色 G绿色 X普通 B带扣 C刺破 L示意LOCK TYPE U超薄F防呆型 HV带高凸点 LC带低凸点, K卡槽 E有耳 NE无耳 X公胶壳 G母胶壳

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

SPECIFICATIONS

- Voltage rating: 30V AC/DC;
- Current rating: 0.5A AC/DC;
- Withstanding Voltage: 200V AC/minute
- Insulation resistance: 100MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 20mΩ Max

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY




东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST0800H-1*NPX-NE-X

品名 TITLE: 0.8-H(无耳)

材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2024. 12. 25

一般公差
GENERAL TOLERANCE
X.X ±0.35
X.XX ±0.20
ANGLE ±1°



ZL