

13790510059


5

4



3

2

1

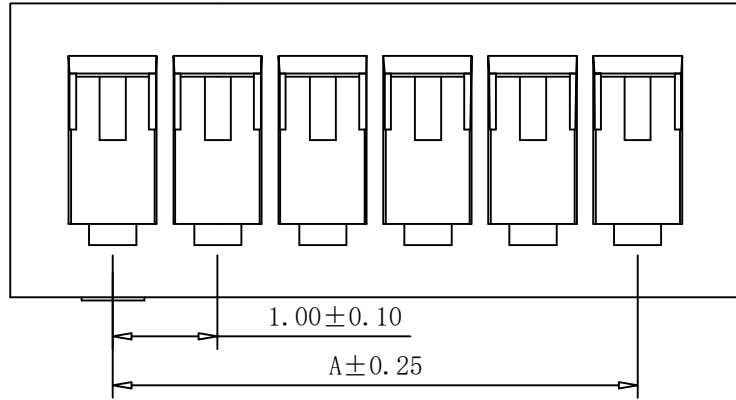

B ± 0.30

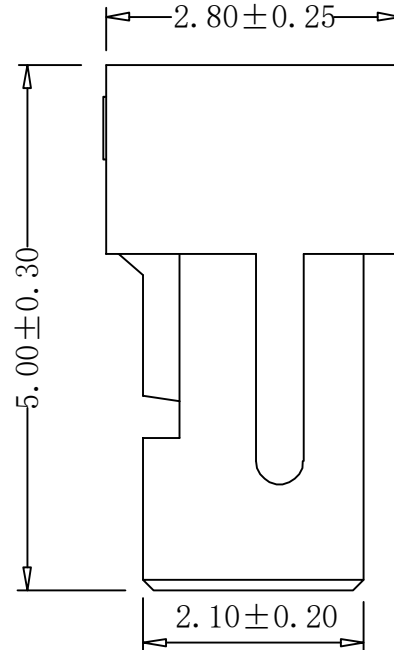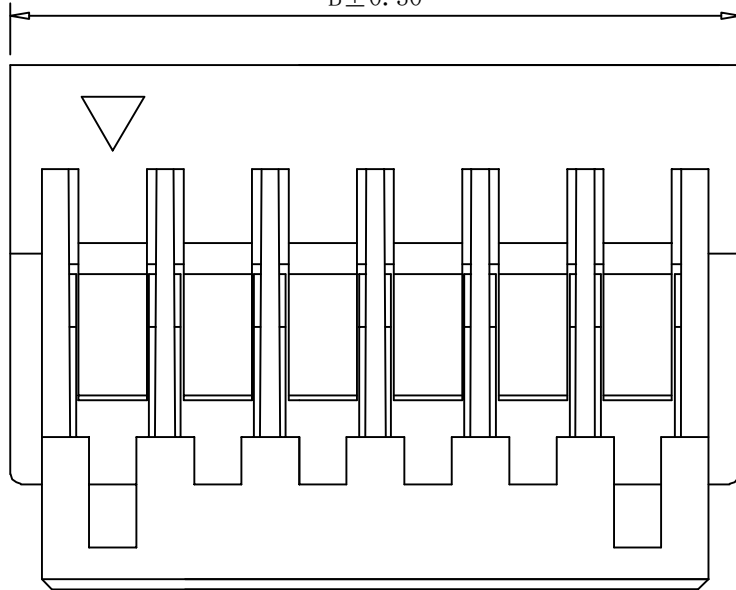

PIN NO.	DIMENSIONS	
	A	B
2P	1.00	3.00
3P	2.00	4.00
4P	3.00	5.00
5P	4.00	6.00
6P	5.00	7.00
7P	6.00	8.00
8P	7.00	9.00
9P	8.00	10.00
10P	9.00	11.00
11P	10.00	12.00
12P	11.00	13.00
15P	14.00	16.00

EST1001 H - 2*NP X - B - X

↑ ↑ ↑ ↑ ↑ ↑

羿通代码+间距 1示意单排 2示意双排 PIN数 X本色 B黑色 R红色 L蓝色 Y黄色 G绿色

H示意胶壳, H后无数字默认材质V0 H后带数字2示意材质V2

X普通 B带扣 C刺破 L示意LOCK TYPE U超薄F防呆型 HV带高凸点 LC带低凸点, K卡槽 E有耳 NE无耳

X公胶壳 G母胶壳

SPECIFICATIONS

- Voltage rating: 50V AC/DC;
- Current rating: 1A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 30mΩ Max
- Material: PA66 UL94-V0



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1001H-1*NPX-NE-X

品名 TITLE: SH1.0-H(无耳单排)

材料:

单位:

MM

包装规格:

比例:

1:1

制图:

审核:

核准:

日期:

2025.8.8


版次
REVISION日期
DATE变更内容
DESCRIPTION核 准
APPROVALBY

一般公差
GENERAL TOLERANCE

X.X ±0.30

X.XX ±0.20

ANGLE ±1°



HDG