

13790510059




5

4



3

2

1

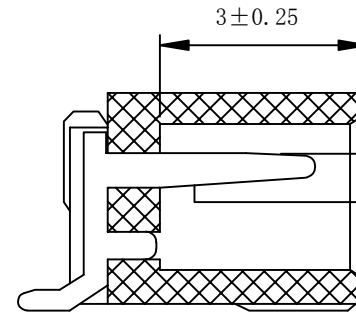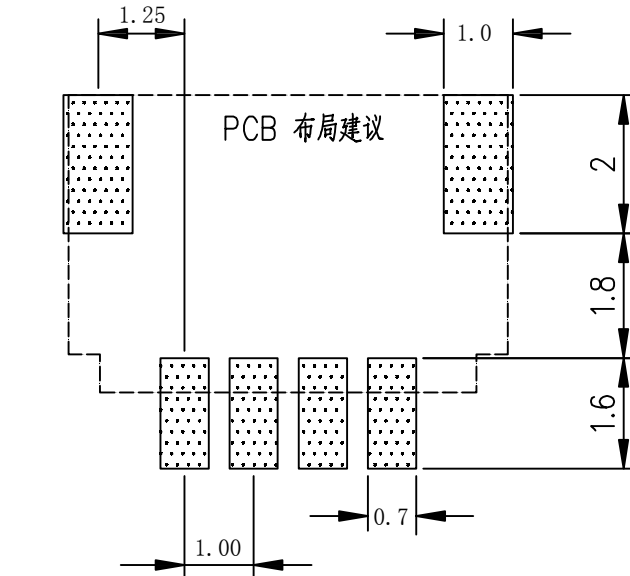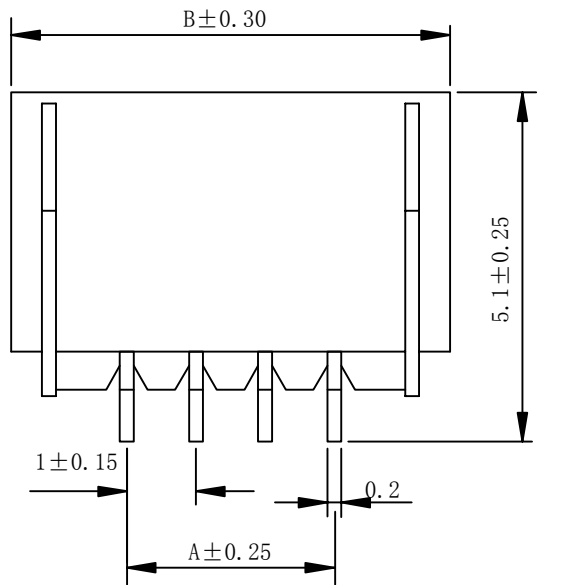

nP	A	B
2	—	4.35
3	2.0	5.35
4	3.0	6.35
5	4.0	7.35
6	5.0	8.35
7	6.0	9.35
8	7.0	10.35
9	8.0	11.35
10	9.0	12.35
11	10.0	13.35
12	11.0	14.35
13	12.0	15.35
14	13.0	16.35
15	14.0	17.35
16	15.0	18.35
17	16.0	19.35
18	17.0	20.40
19	18.0	21.40
20	19.0	22.40

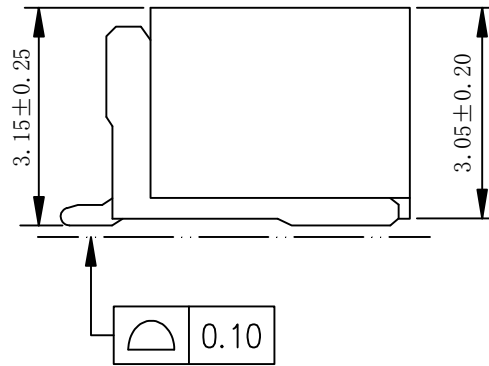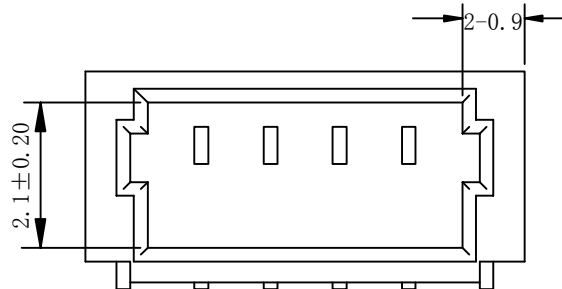

EST1001 W RS - 1*NP X - X - XG - NK-HF

↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑

↑ 间距 ↑ PIN数 ↑ X本色 ↑ X普通 ↑ XG ↑ NK ↑ HF

↑ 1单排 ↑ B黑色 ↑ B带扣 ↑ PH组合排针 ↑ NK为NO MARK ↑ HF无卤

↑ 2双排 ↑ R红色 ↑ U超薄 ↑ FH组合排母 ↑ MK为有MARK ↑ NF普通含卤

↑ L蓝色 ↑ Y黄色 ↑ G绿色

V示意180°直针, VS立式
R示意90°弯针, RS卧式

XG中的X示意尼龙料,
1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T,
6为PA66

G示意PIN针镀金, S为PIN针镀锡

W示意针座
W后无0默认材质为V0
W后带2示意V2

技术参数

间距: 1.0

温度范围: -25~+85

额定电压: 50V AC, DC

额定电流: 0.5A

接触电阻: 20MΩ

绝缘电阻: 100MΩ

耐压: 500V AC/Minute



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1001WRS-1*NPX-X

品名 TITLE: SH1.0卧式

材料: LCP/C2680

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2022.12.10

一般公差
GENERAL TOLERANCE
X, X ±0.25
X, XX ±0.20
ANGLE ±1°



日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVALBY

6

5

4

3

2

1

ZT