

13790510059






5

4

3

2

1

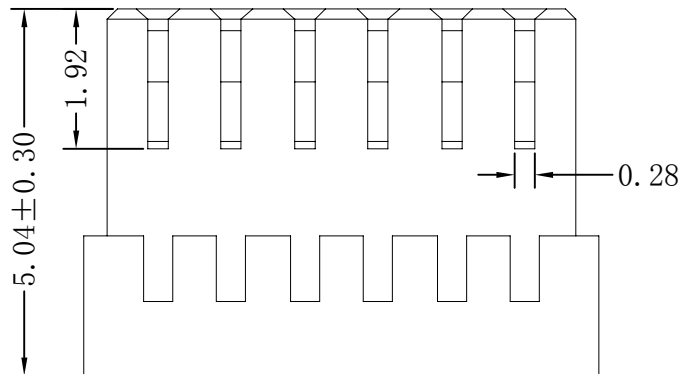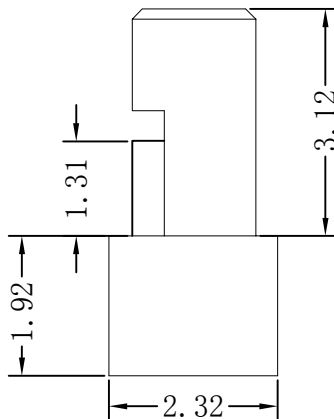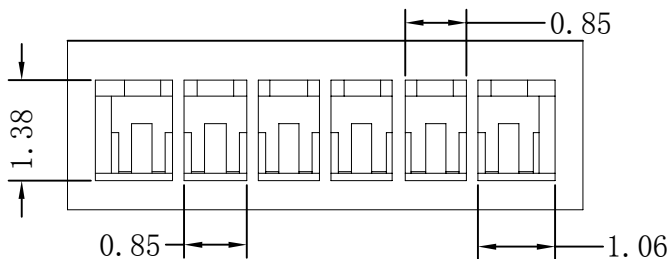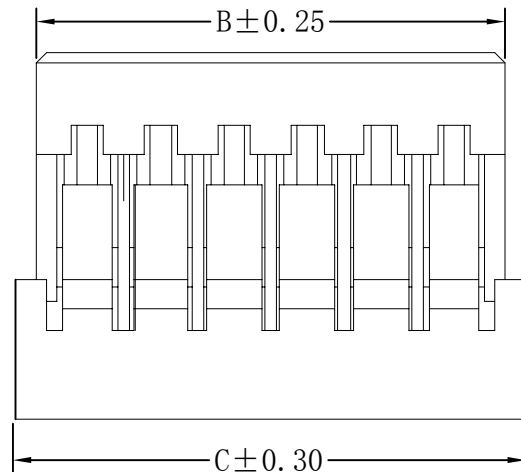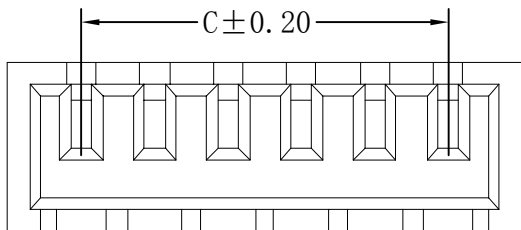

Poles	Dimensions(mm)		
	A	B	C
2	3.02	2.4	1.0
3	4.02	3.4	2.0
4	5.02	4.4	3.0
5	7.02	5.4	4.0
6	8.02	6.4	5.0
7	9.02	7.4	6.0
8	10.02	8.4	7.0
9	11.02	9.4	8.0
10	12.02	10.4	9.0
11	13.02	11.4	10.0
12	14.02	12.4	11.0

NOTES:

1. Material: Nylon66, UL94V-0
2. Color: White
3. Current Rating: 1A AC,DC
4. Voltage Rating: 50V AC,DC
5. Temperature Rang: -25°C~+85°C
6. Contact Resistance: 20mΩ Max
7. Insulation Resistance: 100MΩ Min
8. Withstanding Voltage: 500V AC/minute

EST1005 H - 1*NP X - X - NK - HF-X- X

↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑

羿通代码+间距 PIN数 X本色 B带扣 C刺破 2L示意两则锁扣 X公胶壳 G母胶壳

1示意单排 2示意双排 X黑色 R红色 L蓝色 Y黄色 G绿色

H示意胶壳, H后无数字默认材质V0 H后带数字2示意材质V2

NO MARK

A灼热丝750 B灼热丝850 X普通料

HF示意无卤 NF普通含卤

U超薄F防呆型 HV带高凸点 LC带低凸点, K卡槽 E有耳 NE无耳

东莞市羿通实业有限公司

DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1005H-1*NPX-X

品名 TITLE: NH1.0-H(无扣)

材料: 单位: MM 包装规格: 比例: 1:1

制图: 审核: 核准: 日期: 2022.4.12

一般公差
GENERAL TOLERANCE

X.X ±0.30

X.XX ±0.20

ANGLE ±1°

日期版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

XR