

6



5

4



3

2

1

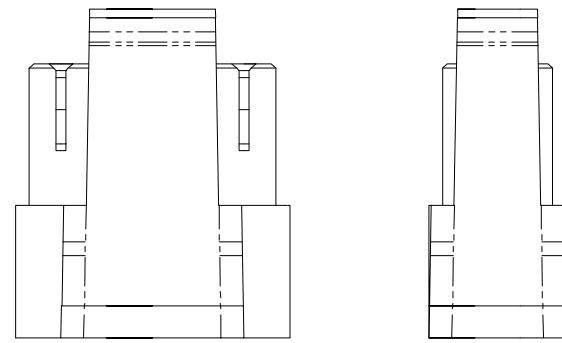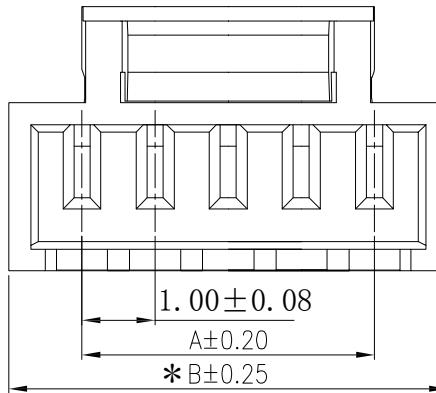

EST1004 H - 1\* NP X - B - X  
 翊通代码+间距 PIN数 X公胶壳  
 1示意单排 X本色 X普通  
 2示意双排 B黑色 B带扣  
 H示意胶壳, C刺破  
 H后无数字默认材质V0 R红色 2L示意两则锁扣  
 H后带数字2示意材质V2 L蓝色 U超薄F防呆型  
 Y黄色 HV带高凸点  
 G绿色 LC带低凸点,  
 K卡槽  
 E有耳  
 NE无耳

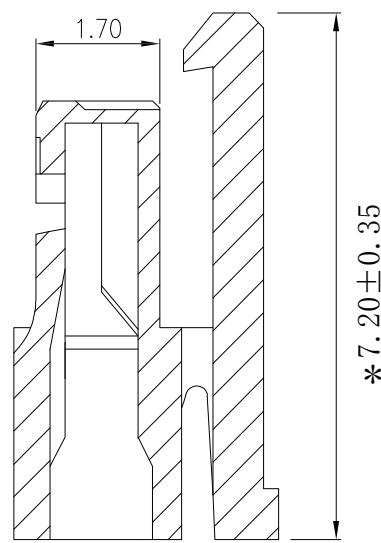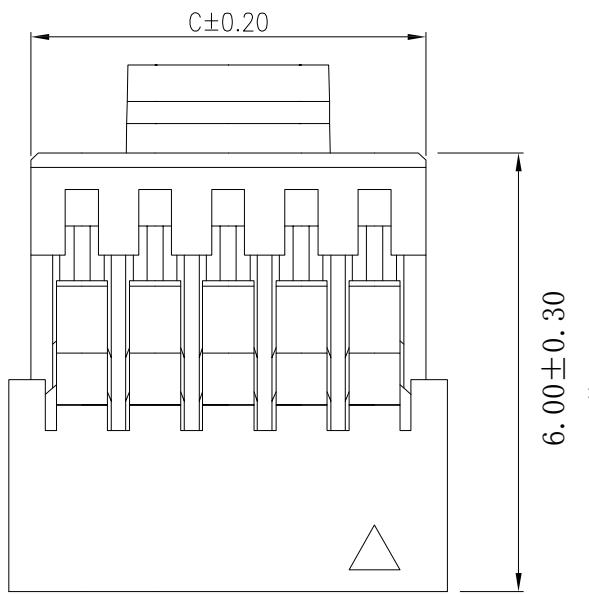

Poles	A	B	C
2	1.00	3.00	2.40
3	2.00	4.00	3.40
4	3.00	5.00	4.40
5	4.00	6.00	5.40
6	5.00	7.00	6.40
7	6.00	8.00	7.40
8	7.00	9.00	8.40
9	8.00	10.00	9.40
10	9.00	11.00	10.40
11	10.00	12.00	11.40
12	11.00	13.00	12.40
13	12.00	14.00	13.40
14	13.00	15.00	14.40
15	14.00	16.00	15.40
16	15.00	17.00	16.40
17	16.00	18.00	17.40
18	17.00	19.00	18.40
19	18.00	20.00	19.40

### NOTES:

- Material: Nylon66, UL94V-0
- Color: White
- Current Rating: 1A AC,DC
- Voltage Rating: 50V AC,DC
- Temperature Rang: -25°C~+85°C
- Contact Resistance: 20mΩ Max
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500V AC/minute

				料号PART NO: EST1005H-1*NPX-B				一般公差 GENERAL TOLERANCE X. X ± 0.30 X. XX ± 0.20 ANGLE ± 1°
				材料:	单位: MM	包装规格:	比例: 1:1	
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVALBY	制图: 审核: 核准: 日期: 2022.4.12		X	XR	

6

5

4

3

2

1

XR