
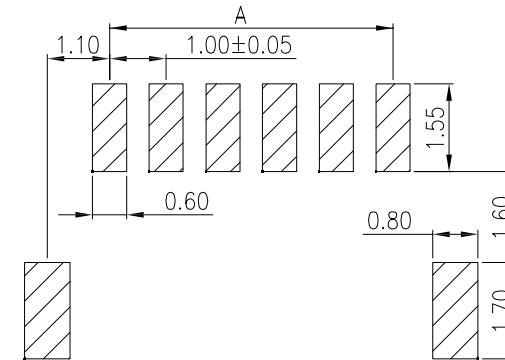

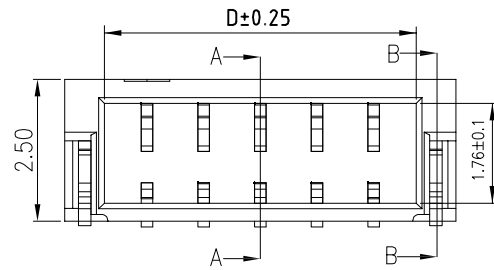
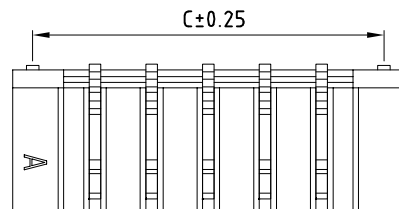

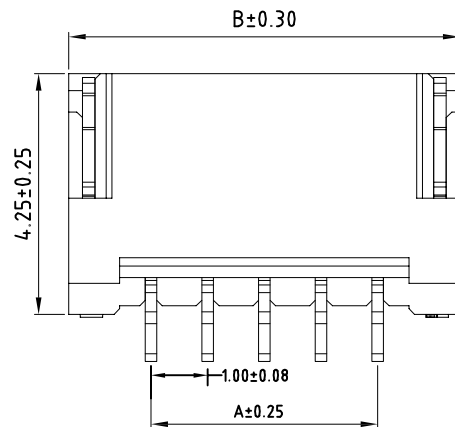




P. C. B Layout

Pin	Dimension(mm)			
	A	B	C	D
02	1.00	3.90	3.20	2.50
03	2.00	4.90	4.20	3.50
04	3.00	5.90	5.20	4.50
05	4.00	6.90	6.20	5.50
06	5.00	7.90	7.20	6.50
07	6.00	8.90	8.20	7.50
08	7.00	9.90	9.20	8.50
09	8.00	10.90	10.20	9.50
10	9.00	11.90	11.20	10.50
11	10.00	12.90	12.20	11.50
12	11.00	13.90	13.20	12.50
13	12.00	14.90	14.20	13.50
14	13.00	15.90	15.20	14.50
15	14.00	16.90	16.20	15.50

[illegible]

NOTES:

1. Material:
Insulation: Thermal Plastic, UL94V-0 (Nature)
Pin: Phosphor Bronze / Tin-Plated
Tab: Phosphor Bronze / Tin-Plated
2. Current Rating: 1A AC, DC
3. Voltage Rating: 50V AC, DC
4. Temperature Range: -25°C ~ +85°C
5. Contact Resistance: 40mΩ Max
6. Insulation Resistance: 500MΩ Min
7. Withstanding Voltage: 500V AC / minute

				料号PART NO: EST1005WRS-1*NPX-B				一般公差 GENERAL TOLERANCE X.X ±0.25 X.XX ±0.20 ANGLE ±1°
				品名 TITLE: NH1.0卧贴1				
				材料: C5191	单位: MM	包装规格:	比例: 1:1	
日期版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	制图:	审核:	核准:	日期: 2023. 8. 24	