
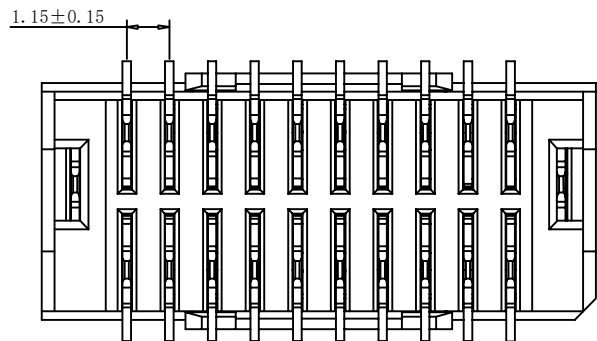

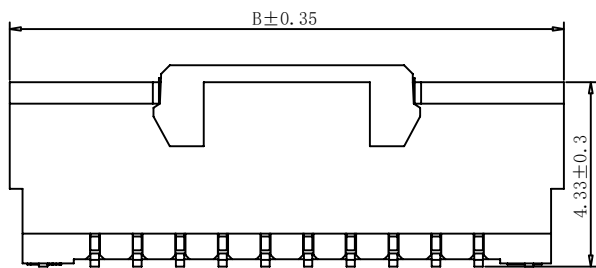
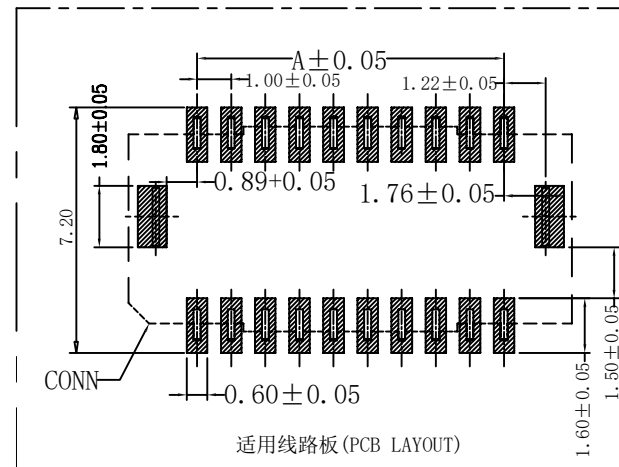
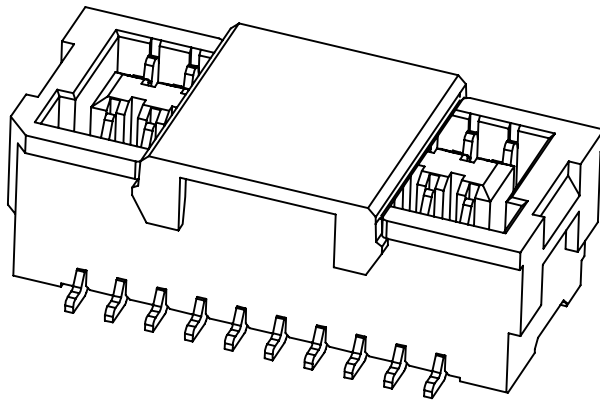


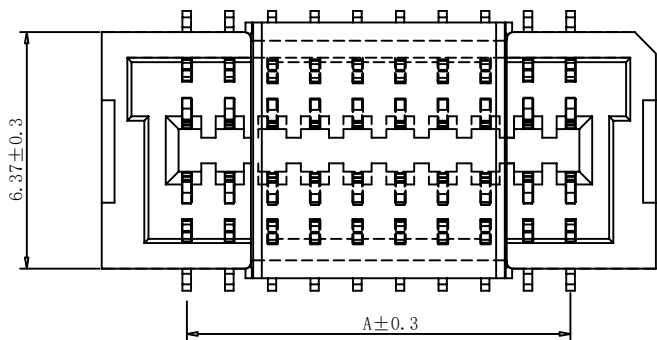

CKT.	A	B
2*4	3.0	7.0
2*5	4.0	8.0
2*6	5.0	9.0
2*7	6.0	10.0
2*8	7.0	11.0
2*9	8.0	12.0
2*10	9.0	13.0
2*11	10.0	14.0
2*12	11.0	15.0
2*13	12.0	16.0
2*14	13.0	17.0
2*15	14.0	18.0
2*16	15.0	19.0
2*17	16.0	20.0
2*18	17.0	21.0
2*19	18.0	22.0
2*20	19.0	23.0
2*25	24.0	28.0

SPECIFICATIONS

Voltage rating: 50V AC/DC

Current rating: 1A AC/DC

Withstanding Voltage: 300V AC/minute

Insulation resistance: 500M Ω Min.

Temperature range: -25°C~+85°C

Contact resistance: 50m Ω Max

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1006WVS-2*NPX-X

品名 TITLE: SHLD1.0-Wafer立贴

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期:

2025. 10. 11

一般公差
GENERAL TOLERANCE
X. X ± 0.30
X. XX ± 0.25
ANGLE $\pm 1^\circ$

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY