

13790510059






5

4

3

2

1

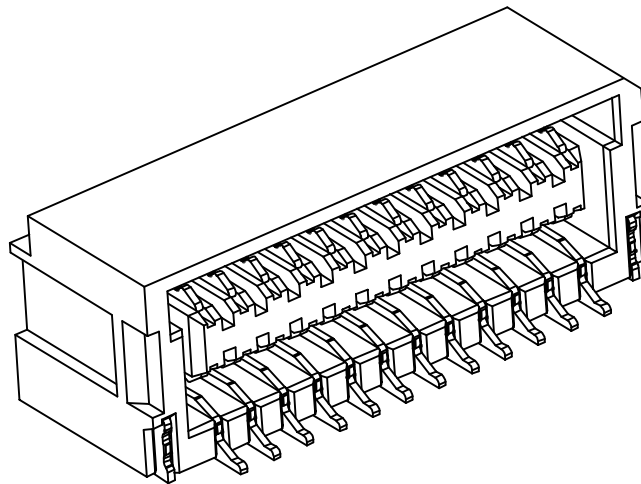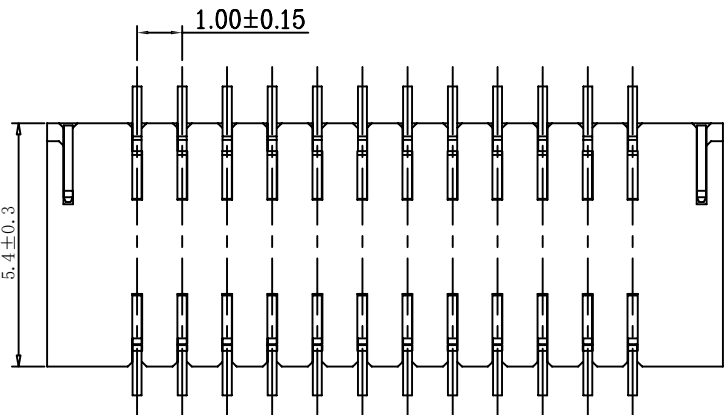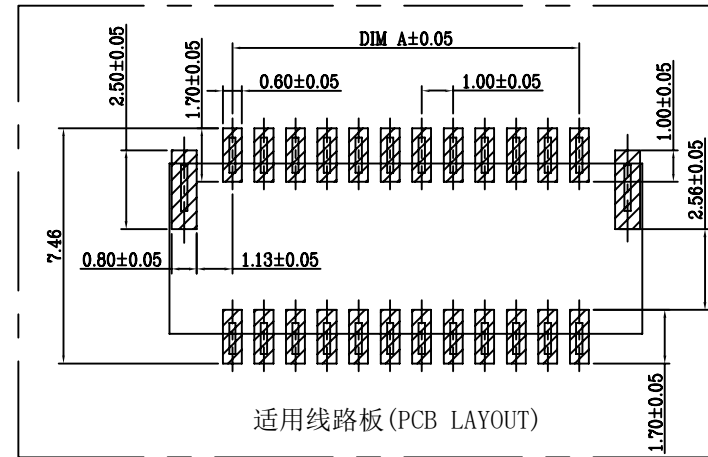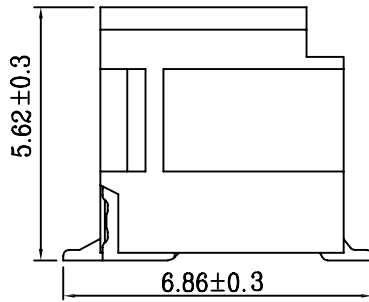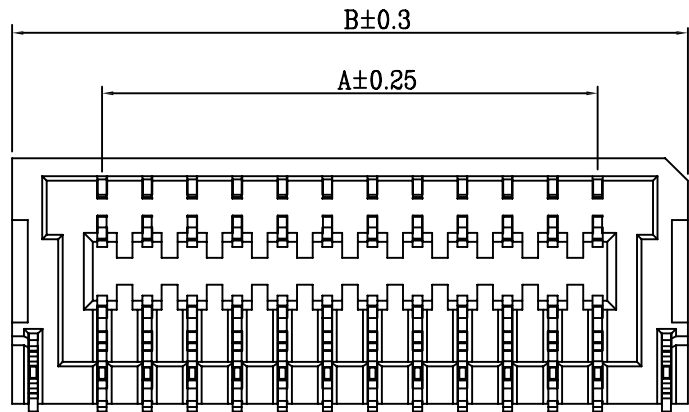

CKT.	A	B
2*4	3.0	7.0
2*5	4.0	8.0
2*6	5.0	9.0
2*7	6.0	10.0
2*8	7.0	11.0
2*9	8.0	12.0
2*10	9.0	13.0
2*11	10.0	14.0
2*12	11.0	15.0
2*13	12.0	16.0
2*14	13.0	17.0
2*15	14.0	18.0
2*16	15.0	19.0
2*17	16.0	20.0
2*18	17.0	21.0
2*19	18.0	22.0
2*20	19.0	23.0

SPECIFICATIONS

Voltage rating: 50V AC/DC

Current rating:1A AC/DC

Withstanding Voltage:300V AC/minute

Insulation resistance:500Mg Min.

Temperature range:-25°C~+85°C

Contact resistance:50mΩ Max

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1006WRS-2*NPX-X

品 名 TITLE: SHLD1.0-Wafer卧贴

材料:

单位:

MM

审核:

包装规格:

比例:

1:1

核准:

日期:

2025. 10. 11

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
ANGLE ±1°



6

5

4

3

2

1

0002