


1.5±0.25
6.15±0.30

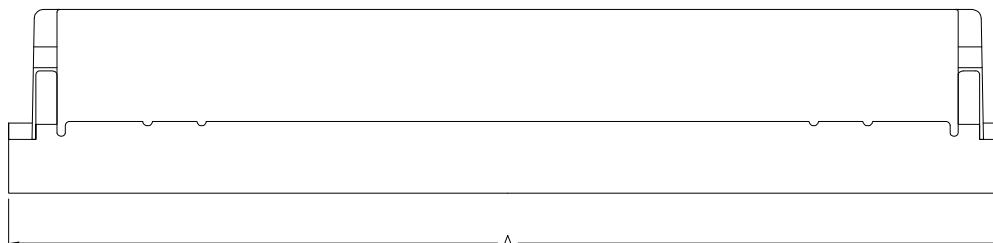

| Pin | A | B | C | D |
|-----|-------|-------|-------|-------|
| 14 | 17.50 | 13.00 | 15.90 | 14.44 |
| 20 | 23.50 | 19.00 | 21.90 | 20.44 |
| 30 | 33.50 | 29.00 | 31.90 | 30.44 |

| 日期版次 REVISION | 日期 DATE | 变更内容 DESCRIPTION | 核 淮 APPROVALBY | 材料 | 单位: MM | 包装规格: | 比例: 1:1 | 一般公差 GENERAL TOLERANCE X.X ±0.30 X.XX ±0.25 ANGLE ±1° |
|------------------|------------|---------------------|-------------------|-----|--------|-------|-----------------|---|
| | | | | 制图: | 审核: | 核准: | 日期: 2022. 4. 13 | |
| 6 | 5 | 4 | 3 | 2 | 1 | | | XR |

Notes

Voltage rating:100V AC/DC
 Current rating:1A AC/DC
 Withstanding Voltage:500V AC/minute
 Insulation resistance:100M ohm Min.
 Temperature range:-40° - +80°
 Contact resistance:20m ohm Max.
 Part No.:
 Material:Base:PA66 UL 94V-0
 Shell:Phosphor bronze,Tin Plated

EST1007 H - 1*N_PX - B - X - HF-NK - X
 羿通代码+间距
 PIN数
 1示意单排
 2示意双排
 H示意胶壳,
 H后无数字默认材质V0
 H后带数字2示意材质V2

| | | |
|-----------|--------|---------|
| X普通 | X公胶壳 | A灼热丝750 |
| B带扣 | G母胶壳 | B灼热丝850 |
| C刺破 | HF示意无卤 | X普通料 |
| 2L示意两侧带锁扣 | NF普通含卤 | |
| U超薄F防呆型 | | |
| HV带高凸点 | | |
| LC带低凸点 | | |
| K卡槽 | | |
| E有耳 | | |
| NE无耳 | | |



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO:EST1007H-1*N_PX-X-X

