

13790510059




5

4




3

2

1

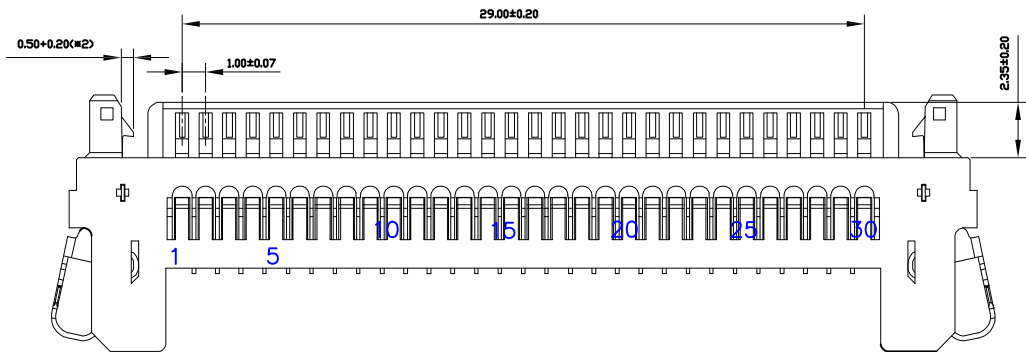

A-A

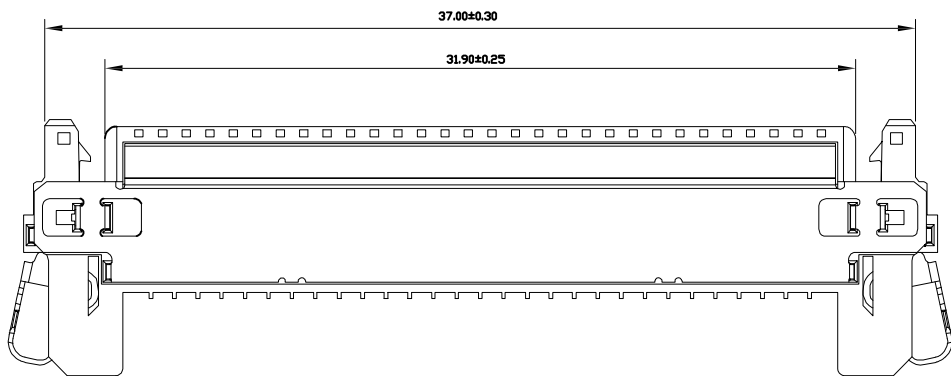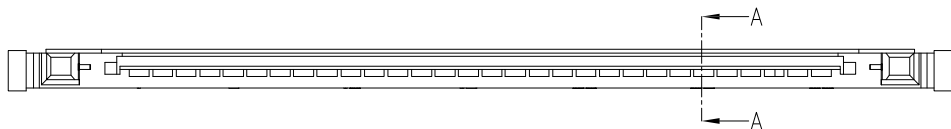

EST1008 H -1*30P X - B - X - HF-NK - X

↑ 羿通代码+间距

↑ PIN数
1示意单排
2示意双排

↑ X 普通
B 带扣
C 刺破
2L 示意两侧带锁扣
U 超薄F 防呆型
HV 带高凸点
LC 带低凸点,
K 卡槽
E 有耳

↑ X 公胶壳
G 母胶壳

↑ NO MARK

↑ HF 示意无卤
NF 普通含卤


↑ A 灼热丝750
B 灼热丝850
X 普通料

H 示意胶壳,
H 后无数字默认材质V0
H 后带数字2示意材质V2

SPECIFICATIONS

- Voltage rating: 50V AC/DC;
- Current rating: 1A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 20mΩ Max
- Material: PA66 UL94-V0
- Q' TY: 1000PCS/Bag

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

				东莞市羿通实业有限公司 DONGGUAN EASTOM ELECTRONIC Co., Ltd.			
料号PART NO: EST1008H-1*30PX-2L-X				一般公差 GENERAL TOLERANCE			
品名 TITLE: 1008-H				X.X ±0.15			
材料: PA66				X.XX ±0.10			
单位: MM		包装规格: 1K/包		比例: 1:1		ANGLE ±1°	
制图:		审核:		日期: 2022. 7. 25			
核准		批准		日期: 2022. 7. 25		XR	

13790510059

5

4

3

2

1