

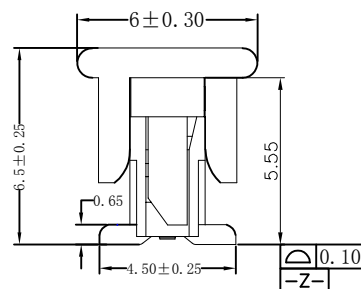



SECTION A-A
SCALE 1:1

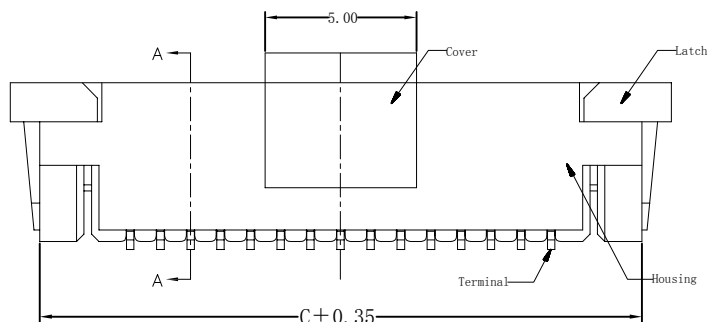


CKTS	DMI A	DMI B	DMI C	DMI D
4	3.00	5.10	9.05	11.00
5	4.00	6.10	10.05	12.00
6	5.00	7.10	11.05	13.00
7	6.00	8.10	12.05	14.00
8	7.00	9.10	13.05	15.00
9	8.00	10.10	14.05	16.00
10	9.00	11.10	15.05	17.00
11	10.00	12.10	16.05	18.00
12	11.00	13.10	17.05	19.00
13	12.00	14.10	18.05	20.00
14	13.00	15.10	19.05	21.00
15	14.00	16.10	20.05	22.00
16	15.00	17.10	21.05	23.00
17	16.00	18.10	22.05	24.00
18	17.00	19.10	23.05	25.00
19	18.00	20.10	24.05	26.00
20	19.00	21.10	25.05	27.00
21	20.00	22.10	26.05	28.00
22	21.00	23.10	27.05	29.00
23	22.00	24.10	28.05	30.00
24	23.00	25.10	29.05	31.00
25	24.00	26.10	30.05	32.00
26	25.00	27.10	31.05	33.00
27	26.00	28.10	32.05	34.00
28	27.00	29.10	33.05	35.00
29	28.00	30.10	34.05	36.00
30	29.00	31.10	35.05	37.00

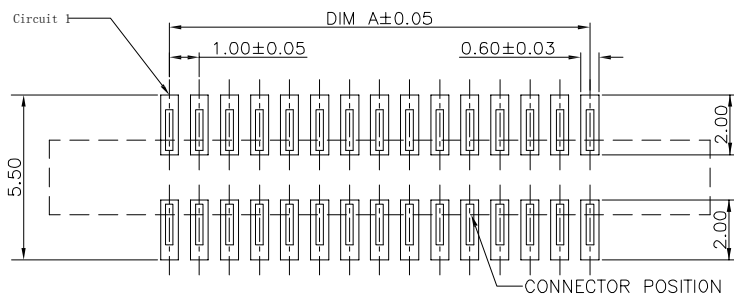

RECOMMENDED P. C. B PATTERN LAYOUT

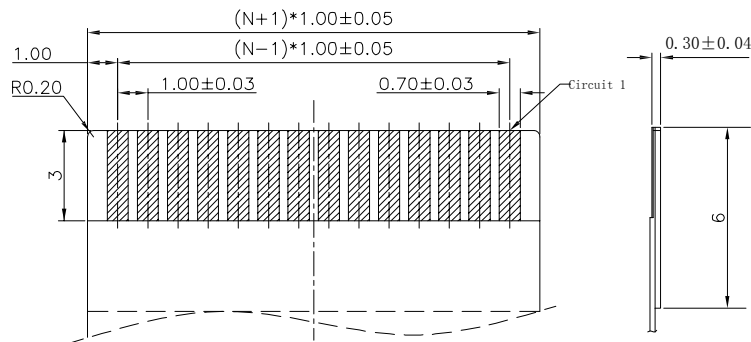

RECOMMENDED FPC/FFC DIMENSION

[illegible]

SPECIFICATIONS

- Voltage rating:30V AC/DC;
- Current rating:0.5A AC/DC;
- Withstanding Voltage:100V AC/minute
- Insulation resistance:100M Ω Min
- Temperature range:-25 $^{\circ}$ C~+85 $^{\circ}$ C
- Contact resistance:30m Ω Max

日期版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALS



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1012WVS-1*NPX-X

品名 TITLE: FPC1.0插座立式抽拉正脚

材料:LCP/C25191

单位: MM

包装规格:

比例:	1:1
日期:	2023.9.9

一般公差	
GENERAL TOLERANCE	
X. X	± 0.25
X. XX	± 0.20
ANGLE	$\pm 1^\circ$

