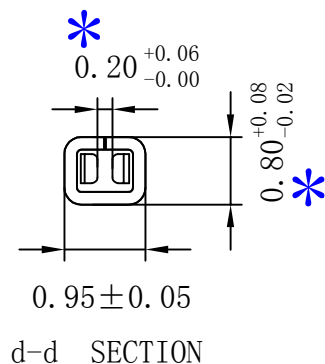
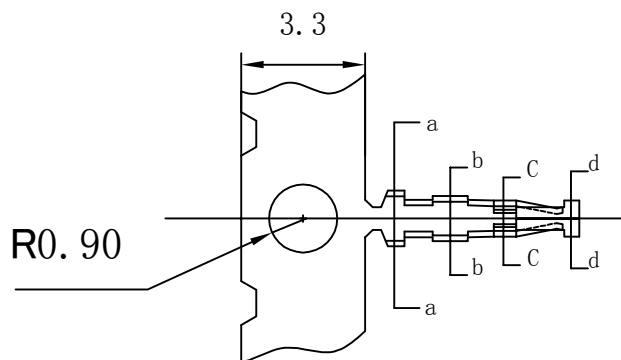


EST1254 T P X - 2 X- X

↑
羿通代码+间距

T示意端子

X公端
G母端
X普通
C示意90°
L长
S短

0素材
2镀锡先冲后镀
3镀锡先镀后冲
5G、15G示意镀金5U"或15U", 1G示意镀金1U"

X普通脚
H高脚

P磷铜
B黄铜
E合金铜

技术参数: SPECIFICATIONS

- 适用线规: AWG#28~#32
Applicable wire: AWG#28~#32
- 额定电压: 250V DC/AC (有效值)
Voltage rating: 250V DC/AC (rms)
- 额定电流: 2.5~1.0A
Current rating: 2.5-1.0A
- 耐压值: 800V AC(有效值)
Withstand voltage: 800V AC(rms)
- 工作温度: -25℃~+85℃
Working Temperature: -25℃+85℃
- 绝缘电阻: ≥1000MΩ
Insulation resistance: ≥1000MΩ
- 接触电阻: ≤0.02Ω
Contact resistance: ≤0.02Ω



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY
A1	2021. 1. 12	分别将0.12更改为0.20, 0.75更改为0.80	胡宗显

料号PART NO: EST1254TPX-2X-G

品名 TITLE: DF14 -T(带扣)

材料: C5191

单位: MM

包装规格: 10K/卷

比例: 1:1

制图:

审核:

核准:

日期: 2021/01/12

一般公差
GENERAL TOLERANCE

X. X	±0.15
X. XX	±0.10
X. XXX	±0.05
ANGLE	±1°

