

13790510059



5

4




3

2

1

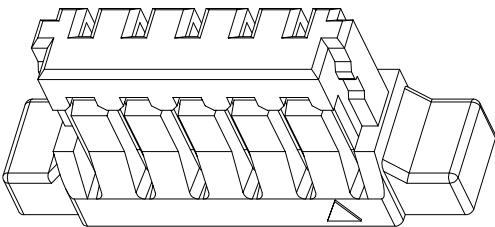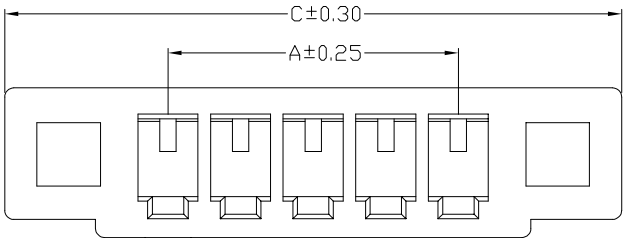

Poles	Dimensions		
	A	B	C
02P	0.80	1.80	4.40
03P	1.60	2.60	5.20
04P	2.40	3.40	6.00
05P	3.20	4.20	6.80
06P	4.00	5.00	7.60
07P	4.80	5.80	8.40
08P	5.60	6.60	9.20
09P	6.40	7.40	10.00
10P	7.20	8.20	10.80
11P	8.00	9.00	11.60
12P	8.80	9.80	12.40
13P	9.60	10.60	13.20
14P	10.40	11.40	14.00
15P	11.20	12.20	14.80
16P	12.00	13.00	15.60
17P	12.80	13.80	16.40
18P	13.60	14.60	17.20
19P	14.40	15.40	18.00
20P	15.20	16.20	18.80

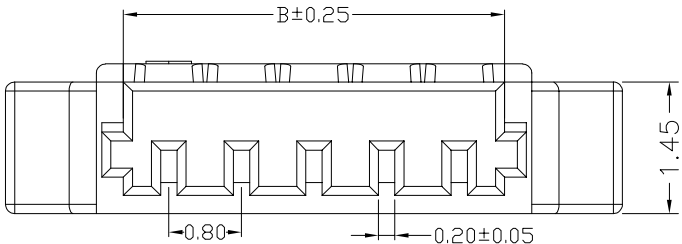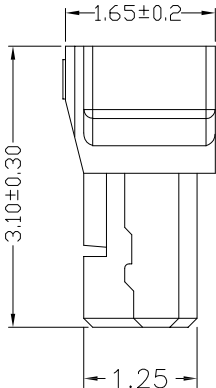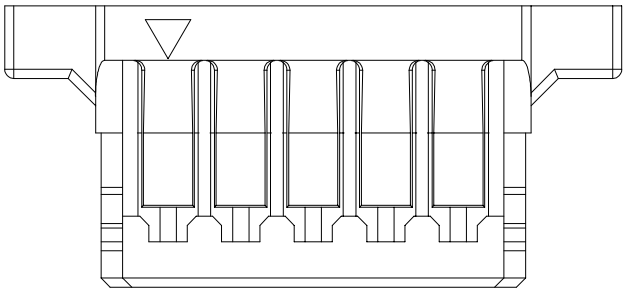

EST0800

H

-

1

*

NP

X

-

B

-

X

羿通代码+ 间距

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

1示意单排
2示意双排

X本色
B黑色
R红色
L蓝色
Y黄色
G绿色

X普通
B带扣
C刺破
L示意LOCK TYPE
U超薄防呆型
HV带高凸点
LC带低凸点,
K卡槽
E有耳
NE无耳

X 公胶壳
G 母胶壳

SPECIFICATIONS

- Voltage rating:30V AC/DC;
- Current rating:0.5A AC/DC;
- Withstanding Voltage:200V AC/minute
- Insulatin resistance:100MΩ Min
- Temperature range:-25℃~+85℃
- Contact resistance:20mΩ Max

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO:EST0800H-1*NPX-E-X

品名 TITLE:0.8-H(有耳)

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2024. 11. 19

一般公差
GENERAL TOLERANCE
X.X ±0.35
X.XX ±0.20
ANGLE ±1°



XDYT/ZL