

1379510059


5

4

3

2


1

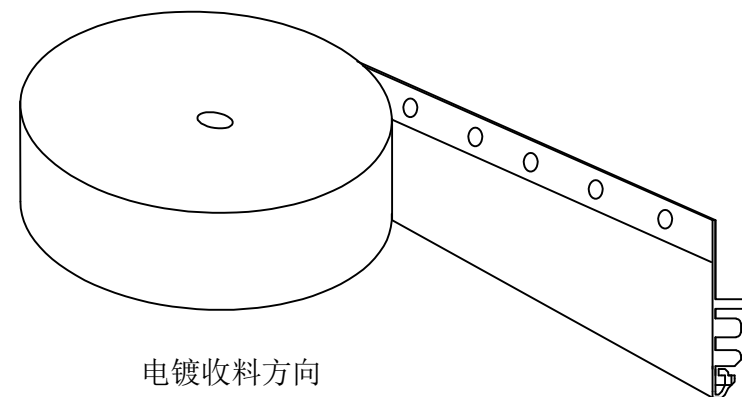

电镀收料方向


PRODUCT SPECIFICATION

1. SURFACE TREATMENT: Tin plated brass terminal
2. Temperature range: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$
3. Current rating: 0.7A AC/DC
4. Contact resistance: $20\text{m}\Omega$ MAX
5. Insulation resistance: $1000\text{M}\Omega$ MIN
6. Withstand voltage: 1000V AC/Minute
7. Applicable wire: 24~30#

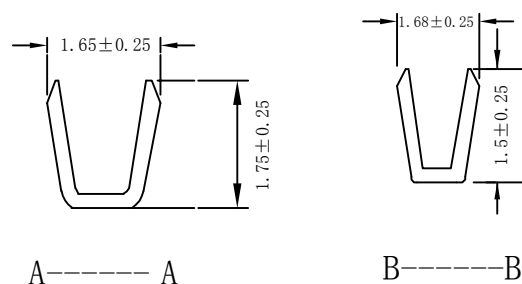


A-----A

B-----B



C



D

EST1502 T B X - 2 X - C

异通代码+间距

T 示端子

X 普通脚

H 高脚

B 黄铜

0 素材

2 镀锡先冲后镀

3 镀锡先镀后冲

5G、15G 示镀金50"或150", 1G 镀金10"

S 示意180°

				料号PART NO: EST1502TBX-2X-C	一般公差 GENERAL TOLERANCE	
				品名 TITLE: SZN1.5-T(90°)	X.X ±0.15	
				材料: 黄铜	单位: MM	X.XX ±0.10
				制图:	审核:	ANGLE ±1°
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	制图:	审核:	日期: 2022. 9. 1

6

5

4

3

2

1

WF