


PART NO.	A	B
2P	1. 50	4. 50
3P	3. 00	6. 00
4P	4. 50	7. 50
5P	6. 00	9. 00
6P	7. 50	10. 50
7P	9. 00	12. 00
8P	10. 50	13. 50
9P	12. 00	15. 00
10P	13. 50	16. 50
11P	15. 00	18. 00
12P	16. 50	19. 50
13P	18. 00	21. 00
14P	19. 50	22. 50
15P	21. 00	24. 00
16P	22. 50	25. 50

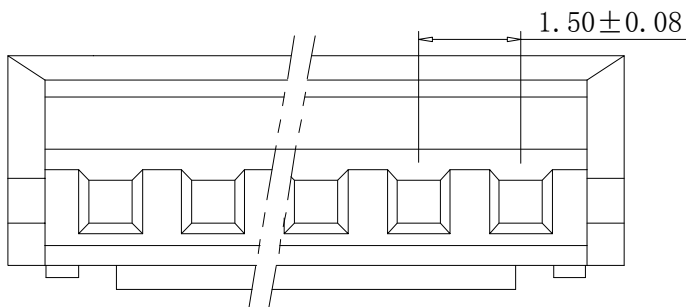

EST1500 H - 1*NP X - X - X - HF-NK - X

↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑

羿通代码+间距 H示意胶壳, H后无数字默认材质V0 H后带数字2示意材质V2

1示意单排 2示意双排

PIN数

X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

X普通
B带扣
C刺破
2L示意两侧带锁扣
U超薄F防呆型
HV带高凸点
LC带低凸点,
K卡槽
E有耳
NE无耳

X公胶壳
G母胶壳

HF示意无卤
NF普通含卤

NO MARK

A灼热丝750
B灼热丝850
X普通料

- Voltage rating:100V DC/AC(rms)
- Current rating:1.0A
- Withstand voltage: 500V AC
- Working Temperature:-25℃~+85℃
- Insulation resistance:≥500MΩ
- Contact resistance:≤0.03Ω

				PART NO: EST1500H-1*NPX-X-X				GENERAL TOLERANCE
				TITLE: ZH1.5-H				X.X ±0.30 X.XX ±0.20
				Material: PA66UL94-V0	Unit: MM	Q' ty/bao: 1K/包	Scale: 1:1	ANGLE ±5°
版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	DR:	CHKD:	APPD:	DATE: 2025. 3. 29	



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.