

13790510059

5

4

3

2

F





E

D

C

B

A

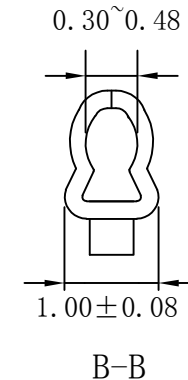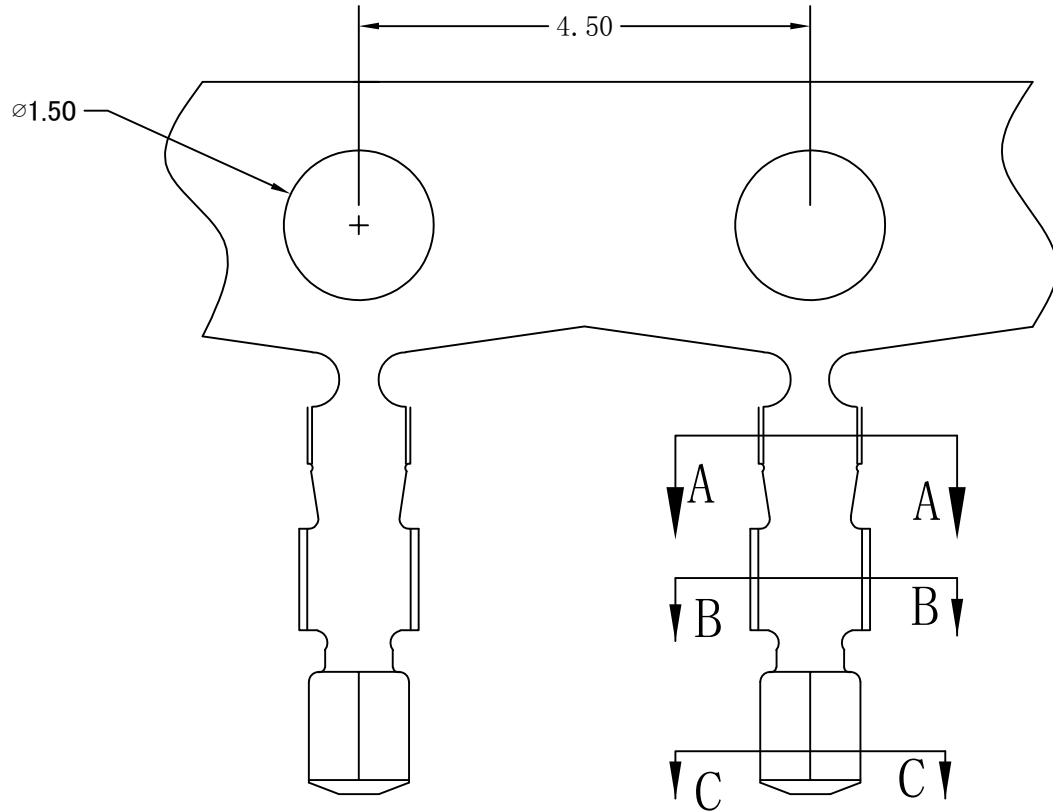

EST1501 T P X - 2 X - G

↑
T示端子
P磷铜
B黄铜
E合金铜

↑
X普通脚
H高脚

↑
X普通
L长
S短

↑
X公端
G母端
C示意90°
S示意180°

0素材
2镀锡先冲后镀
3镀锡先镀后冲
5G、15G示意镀金5U"或15U", 1G示意镀金1U"

SPECIFICATIONS

- Applicable wire: AWG#28~#30
- Voltage rating: 250V DC/AC (rms)
- Current rating: 2.5-1.0A
- Withstand voltage: 800V AC(rms)
- Working Temperature: -25℃+85℃
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 0.02\Omega$

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVALBY




东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1501TPX-2X-G

品名 TITLE: ZH1.5-T

材料: C5191 单位: MM 包装规格: 20K/卷 比例: 1:1
制图: 审核: 核准: 日期: 2023. 6. 3

一般公差
GENERAL TOLERANCE
X. X ± 0.30
X. XX ± 0.20
ANGLE $\pm 1^\circ$



EST NEW MODE