

13790510059

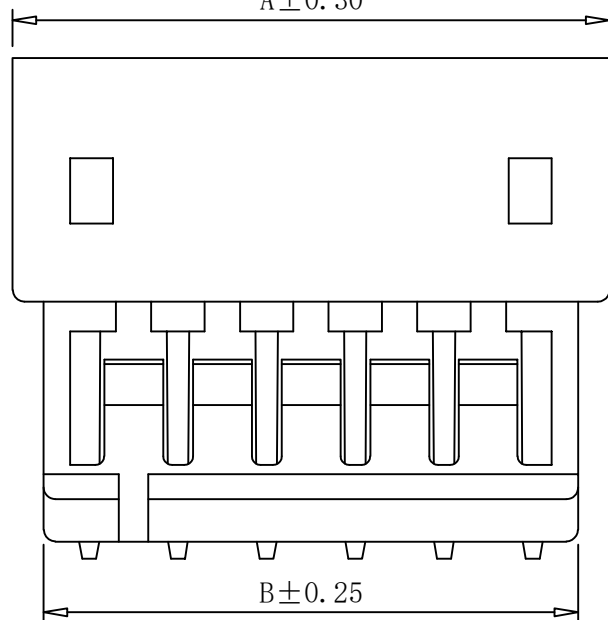
5

4

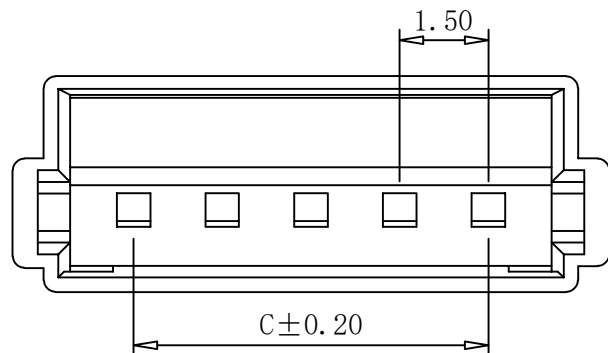
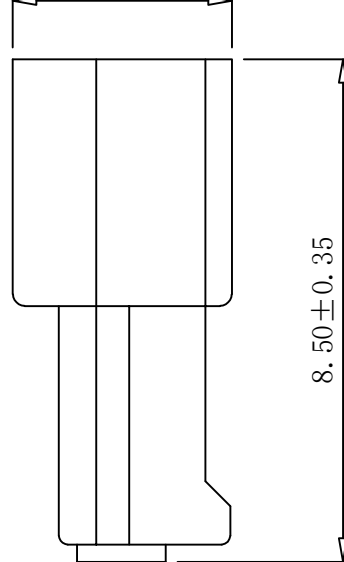
3

2

1

 $A \pm 0.30$  $B \pm 0.25$

1.50

 $C \pm 0.20$ 3.70 ± 0.25  8.50 ± 0.35

Poles	Dimewnsions (mm)		
	A	B	C
2	5.6	4.5	1.5
3	7.1	6.0	3.0
4	8.6	7.5	4.5
5	10.1	9.0	6.0
6	11.6	10.5	7.5
7	13.1	12.0	9.0
8	14.6	13.5	10.5
9	16.1	15.0	12.0
10	17.6	16.5	13.5
11	19.1	18.0	15.0
12	20.6	19.5	16.5
13	22.1	21.0	18.0
14	23.6	22.5	19.5
15	25.1	24.0	21.0
16	26.6	25.5	22.5

EST1501 H - 1*NP X - B - X

↑
羿通代码+间距↑
PIN数1示意单排
2示意双排X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明X普通
B带扣
C刺破
2L示意两侧带锁扣
U超薄F防呆型
HV带高凸点
LC带低凸点,
K卡槽
E有耳
NE无耳H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

- Current rating:2A AC/DC
 - Voltage rating: 250V AC/DC
 - Temperature range: -25℃~+85℃
 - Contact resistace:Initial value/20mΩ max
- Electrical properties
- Insulation resistance:800MΩ min
 - Withstanding voltage:800V AC/ minute
 - Material:PA66
 - Q' Ty:2000PCS/Bag



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1501H-1*NPX-X-G

品名 TITLE: ZH1.5-H(母)

材料:

单位:

MM

包装规格:

比例:

1:1

制图:

审核:

核准:

日期:

2022.05.04

版次
REVISION日期
DATE变更内容
DESCRIPTION核 准
APPROVALBY

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°



XJ