

13790510059



5

4

3

2

1

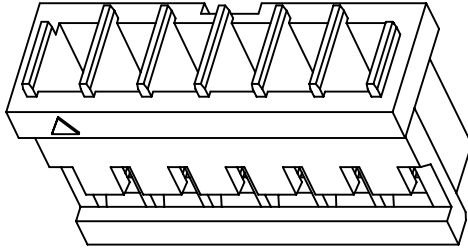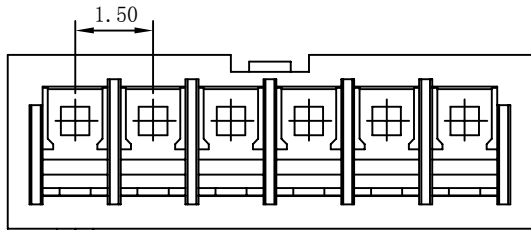





EST1503 H - 1*NP X - X - X - HF-NK - X

↑ 羿通代码+间距 ↑ PIN数 X 本色
1示意单排 2示意双排 B黑色
C刺破 2L示意两侧带锁扣 U超薄V防呆型 HV带高凸点 LC带低凸点 K卡槽 E有耳 NE无耳

↑ X公胶壳 G母胶壳 NO MARK A灼热丝750
B灼热丝850 X普通料

H示意胶壳, H后无数字默认材质V0 H后带数字2示意材质V2

HF示意无卤 NF普通含卤

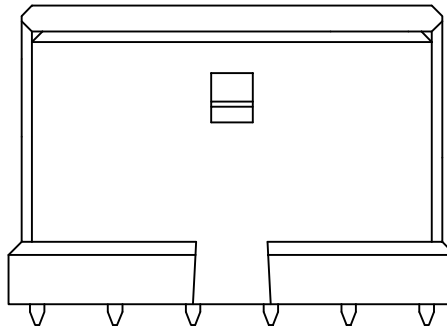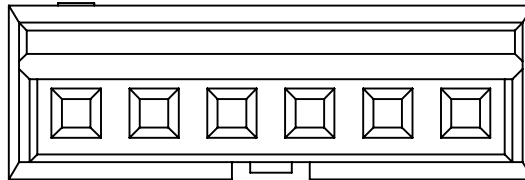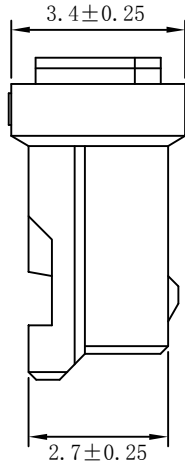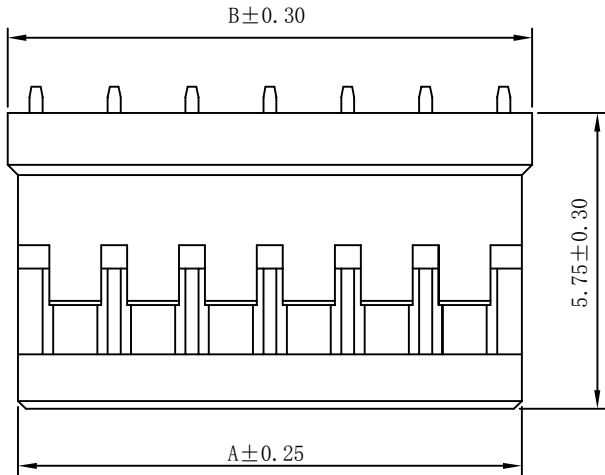

PIN	DIM= A	DIM=B
2	3.60	4.10
3	5.10	5.60
4	6.60	7.10
5	8.10	8.60
6	9.60	10.10
7	11.10	11.60
8	12.60	13.10
9	14.10	14.60
10	15.60	16.10
11	17.10	17.60
12	18.60	19.10
13	20.10	20.60
14	21.60	22.10
15	23.10	23.60
16	24.60	25.10

SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:1.5A AC/DC;
- Withstanding Voltage:500V AC/minute
- Insulatin resistance:1000MΩ Min
- Temperature range:-40℃~+105℃
- Contact resistance:20mΩ Max
- Material:PA66



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1503H-1*NPX-X-X

品名 TITLE: MX1.5-H

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2022. 9. 19


日期版次
REVISION

日期
DATE

变更内容
DESCRIPTION

核 准
APPROVALBY

一般公差
GENERAL TOLERANCE
X. X ±0.25
X. XX ±0.20
ANGLE ±1°



6

5

4

3

2

1

LS