

13790510059








5

4

3

2

1

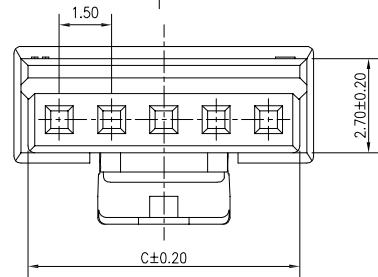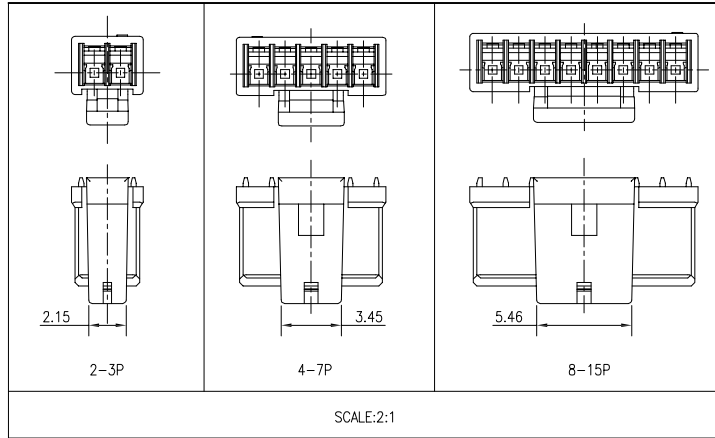

EST1503 H - 1*NP X - B - X - HF-NK - X

↑ 羿通代码+间距 ↑ PIN数 ↑ X本色 ↑ B带扣 ↑ X公胶壳 ↑ NO MARK ↑ A灼热丝750
1示意单排 2示意双排 X本色 B带扣 G母胶壳 B灼热丝850 X普通料
2示意双排 R红色 2L示意两侧带锁扣 U超薄F防呆型 HV带高凸点 LC带低凸点 K卡槽 HF示意无卤 NF普通含卤
L蓝色 Y黄色 G绿色 C透明 E有耳 NE无耳

H示意胶壳, H后无数字默认材质V0 H后带数字2示意材质V2

Pin	A	B	C
2P	1.50	4.10	3.30
3P	3.00	5.60	4.80
4P	4.50	7.10	6.30
5P	6.00	8.60	7.80
6P	7.50	10.10	9.30
7P	9.00	11.60	10.80
8P	10.50	13.10	12.30
9P	12.00	14.60	13.80
10P	13.50	16.10	15.30
11P	15.00	17.60	16.80
12P	16.50	19.10	18.30
13P	18.00	20.60	19.80
14P	19.50	22.10	21.30
15P	21.00	23.60	22.80

SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:1.5A AC/DC;
- Withstanding Voltage:500V AC/minute
- Insulatin resistance:500MΩ Min
- Temperature range:-25℃~+85℃
- Contact resistance:20mΩ Max
- Material:PA66

日期版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1503H-1*NPX-B-X

品 名 TITLE: MX1.5-H(带扣)

材料:

单位:

MM

包装规格:

比例:

1:1

制图:


审核:

核准:

日期:

2022. 10. 25

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
ANGLE ±1°



XES