

13790510059


5

4



3

2

1

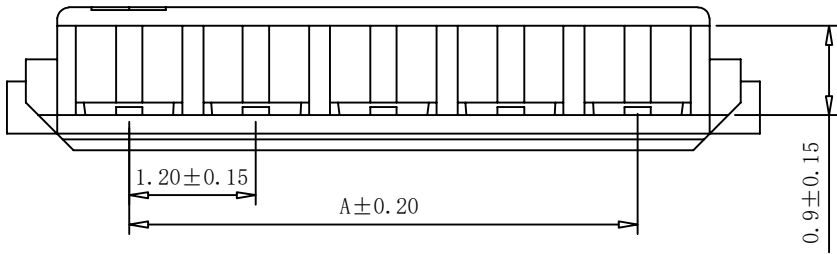

Poles	Dimensions (mm)				
	A	B	C	D	E
2	1.20	2.98	2.55	3.15	3.50
3	2.40	4.18	3.75	4.35	4.70
4	3.60	5.38	4.95	5.55	5.90
5	4.80	6.58	6.15	6.75	7.10
6	6.00	7.78	7.35	7.95	8.30

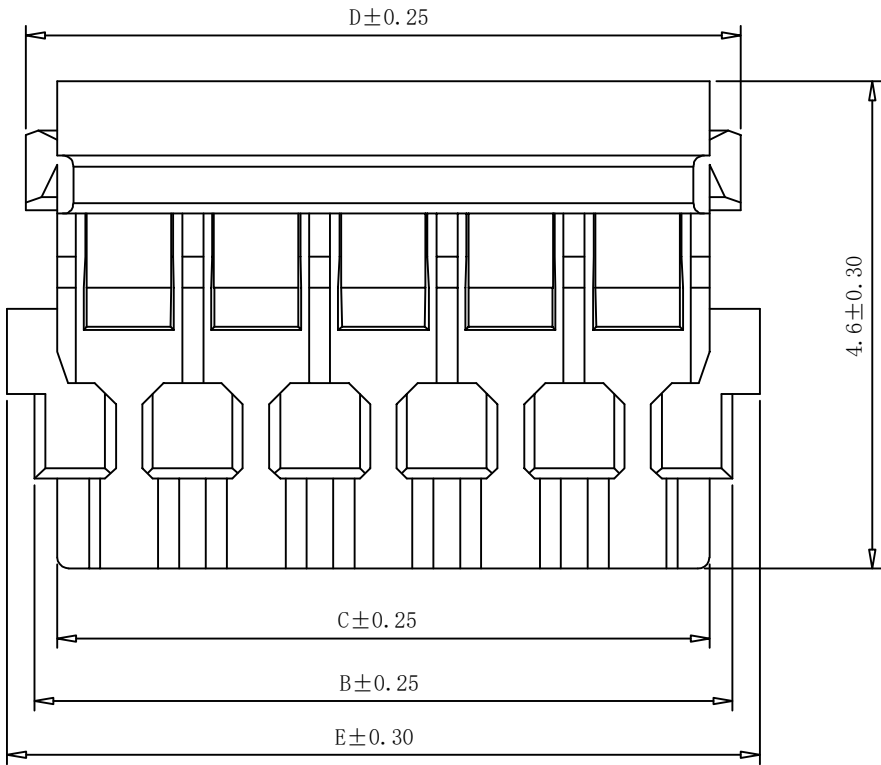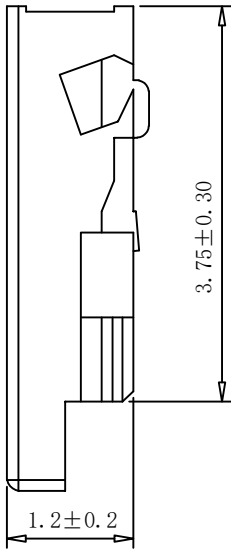

EST1200 H - 1*NP X - B - X

↑
羿通代码+间距

↑
PIN数

1示意单排
2示意双排

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明
X普通
B带扣
C刺破
2L示意两侧带锁扣
U超薄F防呆型
HV带高凸点
LC带低凸点,
K卡槽
E有耳
NE无耳

SPECIFICATIONS

- Voltage rating:50V AC/DC;
- Current rating:2A AC/DC;
- Withstanding Voltage:5000V AC/minute
- Insulatin resistance:100MΩ Min
- Temperature range:-25℃~+85℃
- Contact resistance:100mΩ Max
- Material:PA66 UL94-V0
- Q' TY:2K/BAG



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1200H-1*NPB-X-X

品名 TITLE: DF57-H

材料:

单位:

MM

包装规格:

比例:

1:1

制图:

审核:

核准:

日期:

2025. 9. 27


版次
REVISION

日期
DATE

变更内容
DESCRIPTION

核 准
APPROVALBY

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.20
ANGLE ±1°



6

5

4

3

2

1

0002