



2P示意图




3P示意图


Specifications:
Current rating(额定电流):3A AC/DC.
Voltage rating(额定电压):250V AC/DC
Temperature range(工作温度):-40°C~+105°C.
Contact resistance(接触电阻):30mΩ Max.
Insulation resistance(绝缘电阻):1000MΩ Min.
Withstanding voltage(耐压值):1000V AC/minute.
Material(材质):PA66
PIN:Brass 0.5*8.50

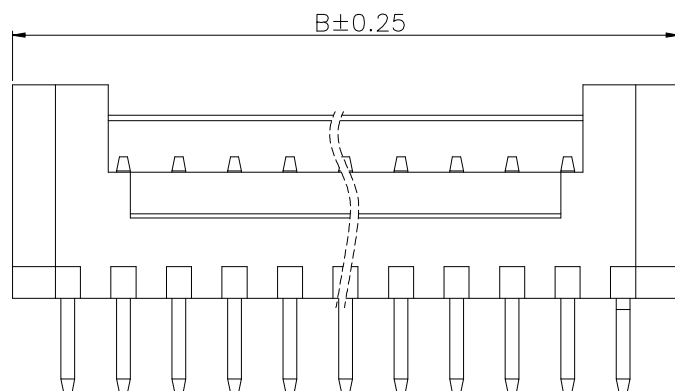


5-16P示意图



4P示意图

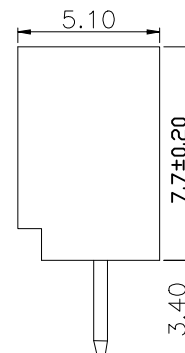

NO.	Dimensions	
	A	B
02P	2.00	6.00
03P	4.00	8.00
04P	6.00	10.00
05P	8.00	12.00
06P	10.00	14.00
07P	12.00	16.00
08P	14.00	18.00
09P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00

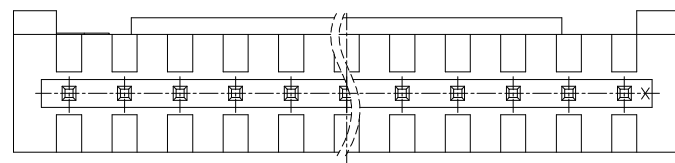

Recommended P.C.B Layout(Top Side)
P.C.B Thickness
(Tolerance=±0.05)



DIM	TOL	DIM	TOL
X.	/	X.	/
X.X	0.25	X.X*	/
X.XX	0.15	X.XX*	/
X.XXX	0.10	X.XXX*	/

		东莞市羿通实业有限公司	
		PH直针宽扣	
DRAW NO.	DATE	P/N NO:	DRAW NAME:
DESIGN: 胡宗显	2020.10.27	REV. A/2	SCALE 1:1
CHECK: 杜建义	2020.10.27		
REVIEW: 李海平	2020.10.27		
UNIT: mm		SHEET: 1 OF 1	