

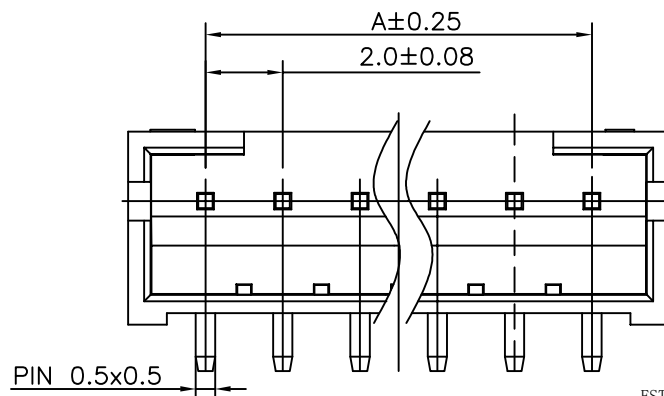


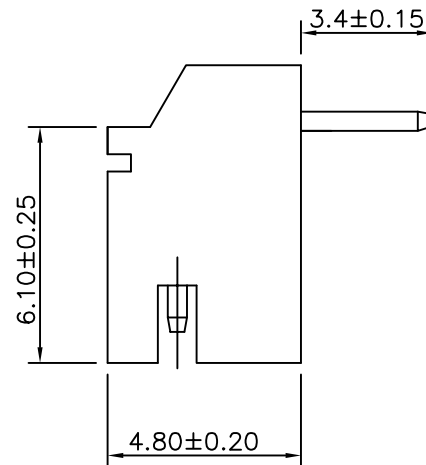

P.C.B Thickness = 1.20mm
(Tolerance=±0.05)



Recommended P.C.B Layout(Top Side)

PART NO.	Dimensions	
	A	B
1*2P	2.00	6.00
1*3P	4.00	8.00
1*4P	6.00	10.00
1*5P	8.00	12.00
1*6P	10.00	14.00
1*7P	12.00	16.00
1*8P	14.00	18.00
1*9P	16.00	20.00
1*10P	18.00	22.00
1*11P	20.00	24.00
1*12P	22.00	26.00
1*13P	24.00	28.00
1*14P	26.00	30.00
1*15P	28.00	32.00
1*16P	30.00	34.00

NOTES:

MATERIAL:PA66UL94V-O
CONTACT: BRASS,TIN PLATED
CURRENT RATING: 2A AC/DC
VOLTAGE RATING: 100V AC/DC
TEMPERATURE RANGE: -25°C~+85°C
CONTACT RESISTANCE: 20mΩ MAX
INSULATION RESISTANCE:1000MΩ MIN
WITHSTANDING VOLTAGE:800V AC/MINUTE
FLASH: 0.05MAX;WARPAGE: 0.08MAX

[illegible]

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

				料号PART NO: EST2001WR-1*NPX-LO				一般公差 GENERAL TOLERANCE
				品名 TITLE: PH2.0-wafer 90°(带定位无K)				X. X ±0.15 X. XX ±0.10 X. XX ±0.05 ANGLE ±1°
				材料: PA66UL94V-0	单位: MM	包装规格: 1K/包	比例: 1:1	
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	制图: LI	审核: LI	核准: LI	日期: 2023/03/08	

EST