

13790510059


5

4

3

2

1

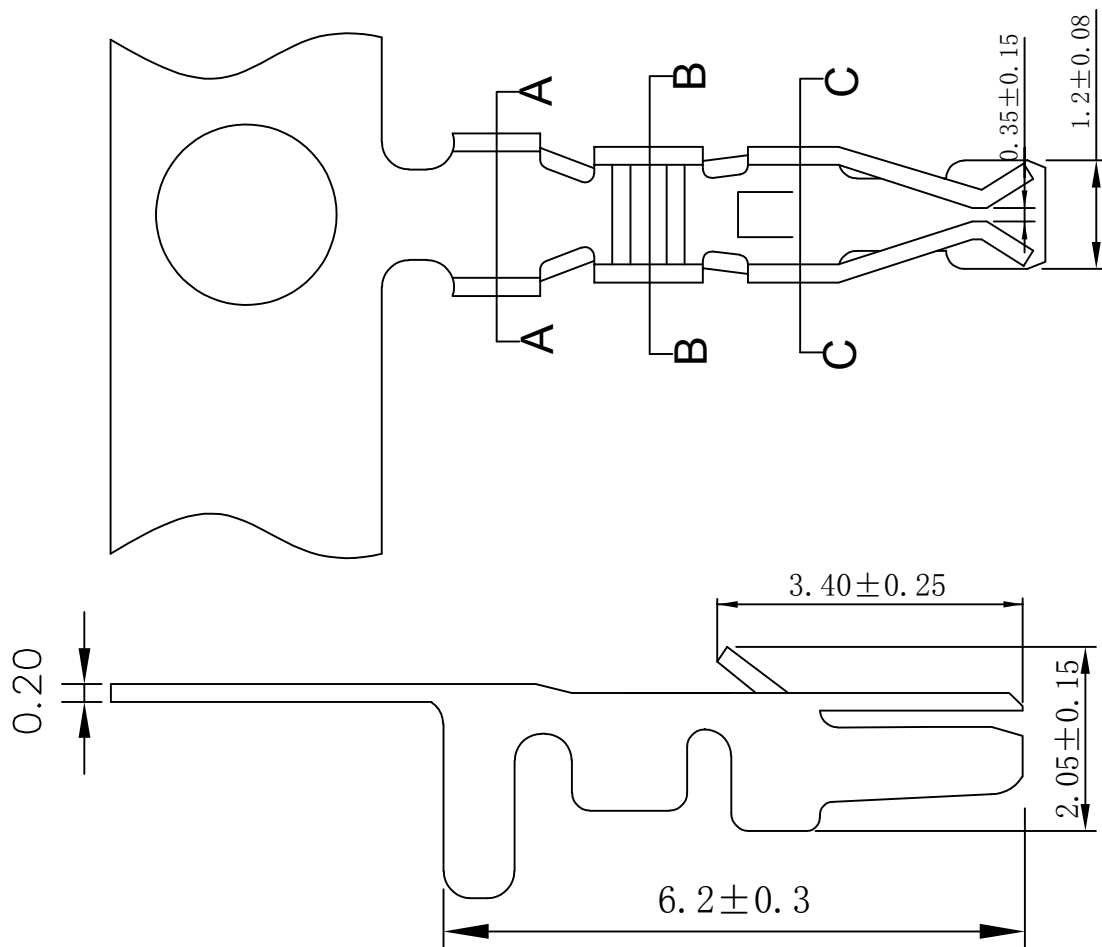

A-A SECTION

C-C SECTION

B-B SECTION

EST2002 T P X - 2 X- G

↑ 羿通代码+间距

↑ T示意端子

↑ X普通脚

↑ H高脚

↑ X普通

↑ L长

↑ S短

↑ X公端

↑ G母端

↑ C示意90°

↑ S示意180°

P磷铜
B黄铜
E合金铜

0素材
2镀锡先冲后镀
3镀锡先镀后冲
5G、15G示意镀金5U"或15U", 1G示意镀金1U"

SPECIFICATIONS

- Applicable wire:AWG#24~#28
- Voltage rating: 250V DC/AC (rms)
- Current rating:2.5-1.0A
- Withstand voltage: 800V AC(rms)
- Working Temperature:-25℃+85℃
- Insulation resistance:≥1000MΩ
- Contact resistance:≤0.02Ω
- Surface preparation:Ni (20-60U"), Sn (60-120U")

A2	2022.06.26	6.6±0.3变更为6.2±0.30	3019X1.11.11
A1	2017.09.21	1.50±0.08变更为1.65±0.08	11.11.11.11.11
A0	2015.10.13	初版发行	3019X1.11.11
版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2002TPX-2X-G

品名 TITLE: PHD2.0-T

材料: C5191

单位: MM

包装规格: 10K/卷

比例: 1:1

制图:

审核:

核准:

日期:
2022/06/26

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
ANGLE ±1°



EST