

13790510059






5

4


3

2

1

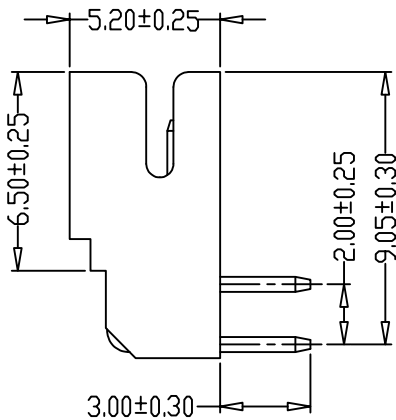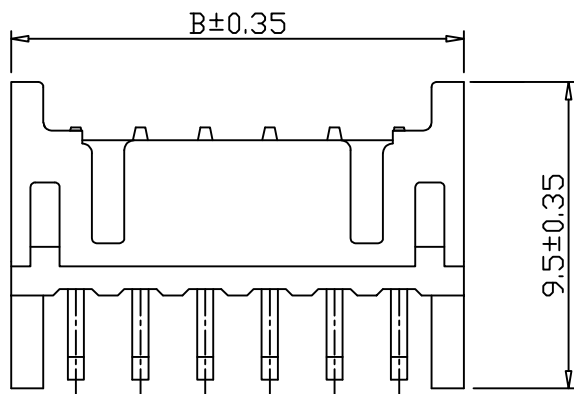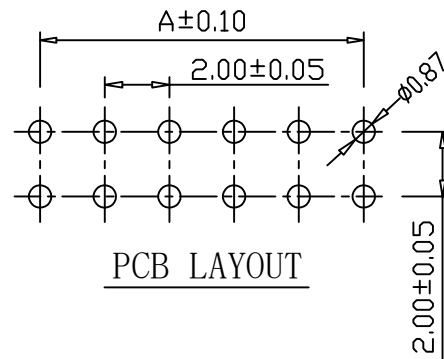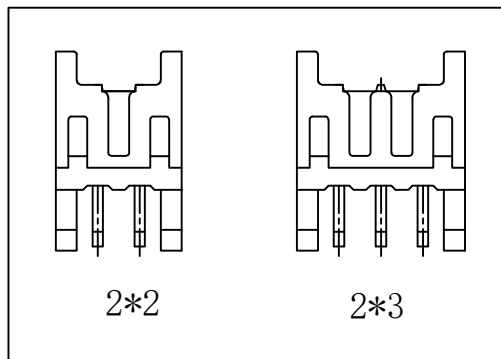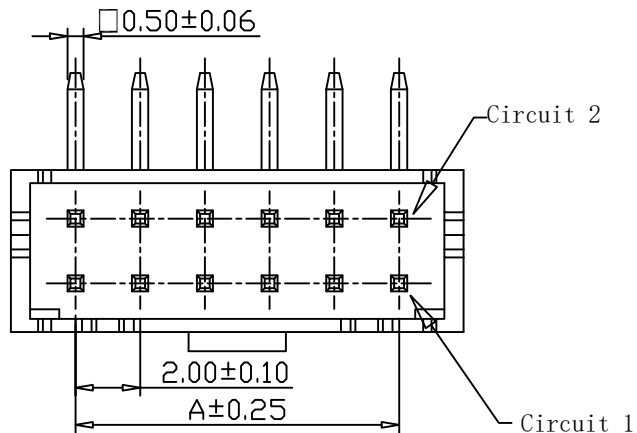

PIN	尺寸 (mm)	
	A	B
2*02	2.00	6.00
2*03	4.00	8.00
2*04	6.00	10.00
2*05	8.00	12.00
2*07	10.00	14.00
2*08	12.00	16.00
2*09	14.00	18.00
2*10	16.00	20.00
2*11	18.00	22.00
2*12	20.00	24.00
2*13	22.00	26.00
2*14	24.00	28.00
2*15	26.00	30.00
2*15	28.00	32.00
2*16	30.00	34.00
2*17	32.00	36.00
2*18	34.00	38.00
2*19	36.00	40.00
2*20	38.00	42.00

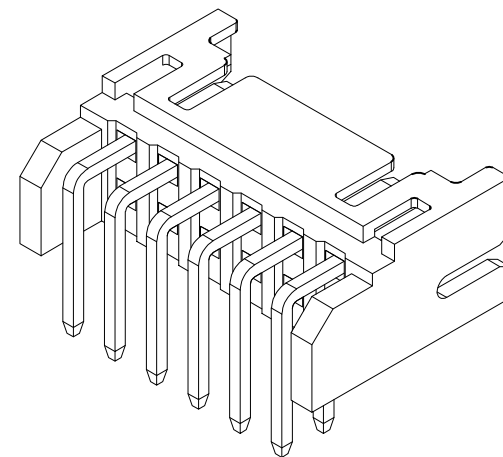

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 20mΩ Max
- Sheel: PA46
- PIN: Brass Tin-plated



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST2002RV-2*NPX-X

品名 TITLE: PHD2.0弯针无扣(双排)

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2022.6.8

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

6

5

4

3

2

1

HY