

13790510059


5

4

3

2

1

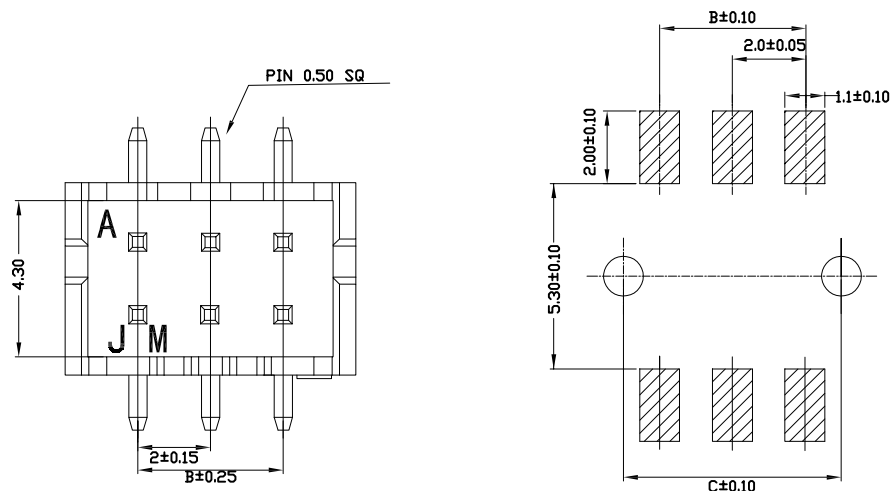

P.C.B LAYOUT

2P 视图

POLES	Dimensions		
	A	B	C
2X02P	6.00	2.00	4.00
2X03P	8.00	4.00	6.00
2X04P	10.00	6.00	8.00
2X05P	12.00	8.00	10.00
2X06P	14.00	10.00	12.00
2X07P	16.00	12.00	14.00
2X08P	18.00	14.00	16.00
2X09P	20.00	16.00	18.00
2X10P	22.00	18.00	20.00
2X11P	24.00	20.00	22.00
2X12P	26.00	22.00	24.00
2X13P	28.00	24.00	26.00
2X14P	30.00	26.00	28.00
2X15P	32.00	28.00	30.00
2X16P	34.00	30.00	32.00
2X17P	36.00	32.00	34.00
2X18P	38.00	34.00	36.00
2X19P	40.00	36.00	38.00
2X20P	42.00	38.00	40.00

EST2002 WVS -1*NP X - X - X X - NK-HF

↑ 界面代码↑间距

↑ PIN X 本色
1 单排
2 双排

↑ B 黑色
R 红色
L 蓝色
Y 黄色
G 绿色

↑ X 普通
B 带扣
U 超薄
PH 组合排针
H 高弯
K 打眼
D 防呆型
LD 带定位孔
KLD 带定位孔

↑ G / PIN 针镀金
S / PIN 针镀锡

↑ 1 / PPS, 2 / PBT, 3 / LCP, 4 / ABS, 5 / PA6T, 6 / PA66

↑ HF 无卤
NF 普通含卤

↑ NK / NO MARK
MK 为 MARK

↑ V 示意针座
V 后无0默认材质为V0
V 后带2示意V2

Specifications:
Current rating:3A AC/DC.
Voltage rating:250V AC/DC
Temperature range:-40°C~+105°C.
Contact resistance:10MΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage: 800V AC/minute.
Material:pa9t 94v0.

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2002WVS-2*NPX-2

品名 TITLE: PHD2.0 立贴(有柱)

材料: 单位: MM 包装规格: 比例: 1:1

制图: 审核: 核准: 日期: 2022. 5. 30

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
ANGLE ±1°



JM