
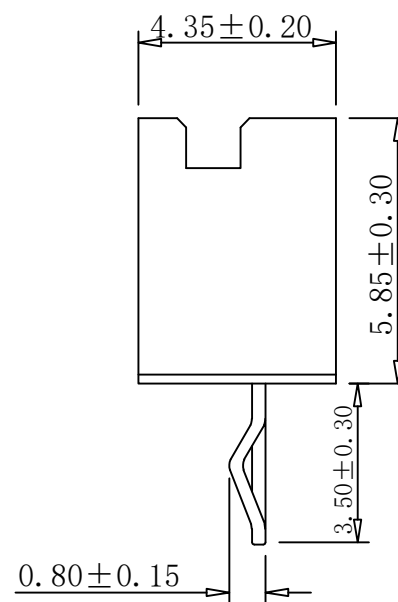


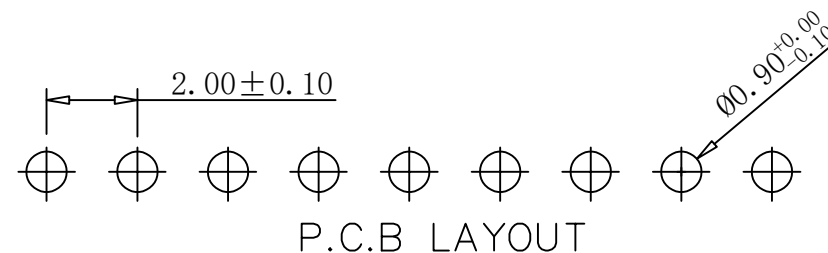

POLES	DIMENSION (mm)	
	A	B
1*2	2.00	6.00
1*3	4.00	8.00
1*4	6.00	10.00
1*5	8.00	12.00
1*6	10.00	14.00
1*7	12.00	16.00
1*8	14.00	18.00
1*9	16.00	20.00
1*10	18.00	22.00
1*12	20.00	24.00
1*13	22.00	26.00
1*14	24.00	28.00
1*15	26.00	30.00
1*16	28.00	32.00

SPECIFICATIONS

- Current rating:1A AC,DC;
- Voltage rating:125V AC, DC
- Temperature range:-25℃ to +85℃
- Contact resistance: $\leq 30\text{m}\Omega$
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Withstand voltage: 500V AC/minute
- Material: PIN (C2680) ;SHEEL (PA66)
- Q' TY:1000 Pcs/Bag

版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALS



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2003WV-1*NPX-X

晶名	TITLE: MX2.0-WAFER直针
----	----------------------

材料:

单位:

包装规格:	
-------	--

比例:	1:1
日期:	2025/11/

一般公差	
GENERAL TOLERANCE	
X, X	± 0.30
X, XX	± 0.25
ANGLE	$\pm 1^\circ$

