

13790510059

5

4

3

2


1

 12.4 ± 0.35 10.0 ± 0.30 2.00 ± 0.10

2.00

 2.00 ± 0.25 3.30 ± 0.25

2.00

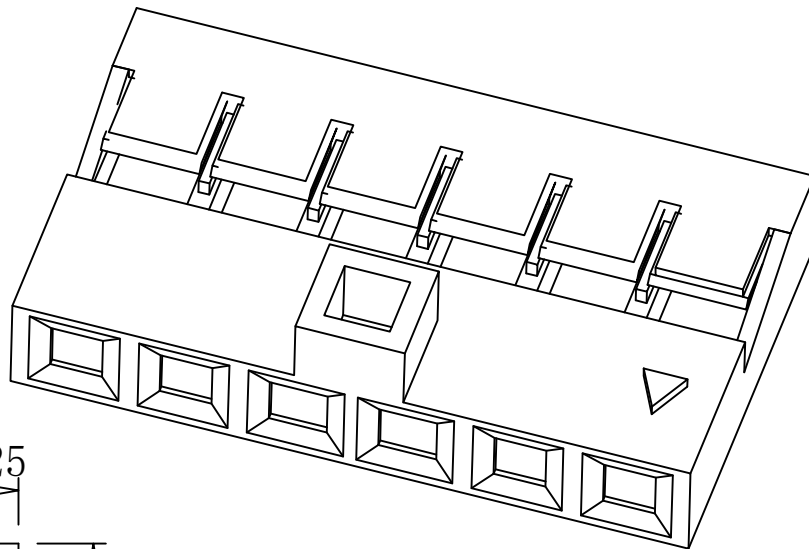 7.1 ± 0.30 

EST2004 H - 1*6P X - B - X

↑
羿通代码+间距↑
PIN数X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明X普通
B带扣
C刺破
2L示意两侧带锁扣
U超薄F防呆型
HV带高凸点
LC带低凸点,
K卡槽
E有耳H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 2A AC/DC;
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Contact resistance: 20mΩ Max
- Material: Glow-wire Plastic



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2004H-1*NPB-LC-X

品名 TITLE: DB2.0-H(LC)

材料: PA66

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2025. 6. 27

一般公差
GENERAL TOLERANCE
X. X ± 0.30
X. XX ± 0.25
ANGLE $\pm 1^{\circ}$



ZL

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY