

13790510059





5

4

3

2

1

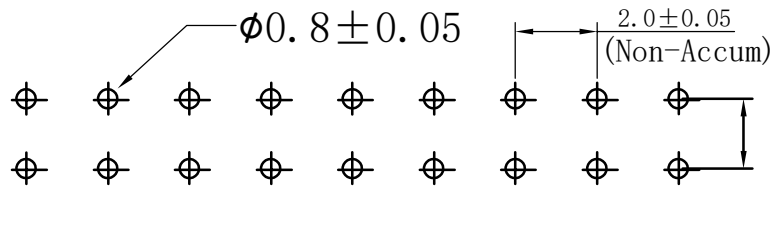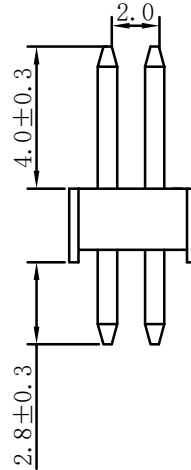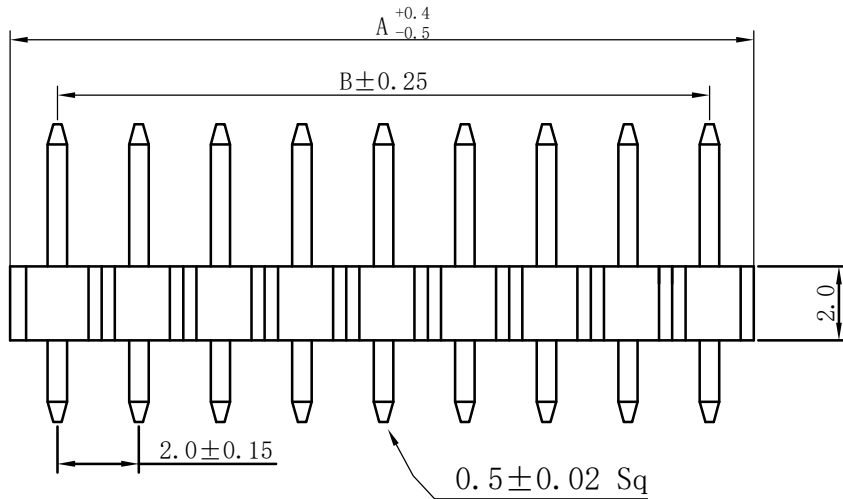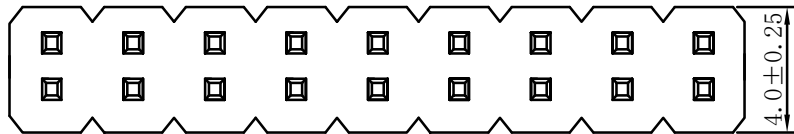

PCB Layout

EST2004 W V - 2*NP X - X

W 示意针座

V 示意180° 直针, VS立式

X 示意90° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

X 示意180° 弯针, RS卧式

SPECIFICATIONS

Current Rating:

3Amps

Insulator resistance:

5000 Megchms min.

Dielectric Withstanding:

AC 500v

Operating Temperature:

-20° ~ +85° C

Contact Material:

Brass

Insulator Material:

PA6T

Plating:

Glod flash

UNSPECIFIED TOLERANCE: ±0.20

Dimensions list

Contacts Per row	Dimensions A	Dimensions B	Contacts Per row	Dimensions A	Dimensions B
1	2.0	0	21	42.0	40.0
2	4.0	2.0	22	44.0	42.0
3	6.0	4.0	23	46.0	44.0
4	8.0	6.0	24	48.0	46.0
5	10.0	8.0	25	50.0	48.0
6	12.0	10.0	26	52.0	50.0
7	14.0	12.0	27	54.0	52.0
8	16.0	14.0	28	56.0	54.0
9	18.0	16.0	29	58.0	56.0
10	20.0	18.0	30	60.0	58.0
11	22.0	20.0	31	62.0	60.0
12	24.0	22.0	32	64.0	62.0
13	26.0	24.0	33	66.0	64.0
14	28.0	26.0	34	68.0	66.0
15	30.0	28.0	35	70.0	68.0
16	32.0	30.0	36	72.0	70.0
17	34.0	32.0	37	74.0	72.0
18	36.0	34.0	38	76.0	74.0
19	38.0	36.0	39	78.0	76.0
20	40.0	38.0	40	80.0	78.0



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2004WVS-2*NPB-F

品名 TITLE: DB2.0排针DIP双排

材料:

单位:

MM

包装规格:2K/Bag

比例:

1:1

制图:

审核:

核准:

日期:

2025.6.13

版次

日期

变更内容


核 准

制 图

审 核

日 期

2025.6.13



一般公差
GENERAL TOLERANCE

X.X ±0.30

X.XX ±0.25

ANGLE ±1°

XCL