

13790510059



5

4

3

2

1

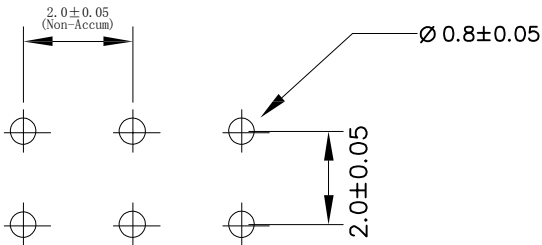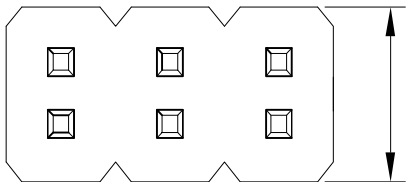



PCB Layout

EST2004 W V - 2*NP X -PH - X X - NK-HF

↑ 弄通代码+间距 ↑ PIN数 X本色 X普通 - G为PIN针镀金 ↑ HF无卤 NF普通含卤
1单排 B黑色 B带扣 S为PIN针镀锡 NK为NO MARK NK为有MARK
2双排 R红色 U超薄 PH组合排针 1为PFS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PAB6
Y黄色 F组合排母 H高弯 K打脚 D防呆型 2示意有柱 KLO带定位打K
G绿色 R示意90°弯针, RS卧式 R高弯 V示意180°直针, VS立式 W后无0默认材质为V0 W后带2示意V2

Dimensions list

Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
1	2.0	0	21	42.0	40.0
2	4.0	2.0	22	44.0	42.0
3	6.0	4.0	23	46.0	44.0
4	8.0	6.0	24	48.0	46.0
5	10.0	8.0	25	50.0	48.0
6	12.0	10.0	26	52.0	50.0
7	14.0	12.0	27	54.0	52.0
8	16.0	14.0	28	56.0	54.0
9	18.0	16.0	29	58.0	56.0
10	20.0	18.0	30	60.0	58.0
11	22.0	20.0	31	62.0	60.0
12	24.0	22.0	32	64.0	62.0
13	26.0	24.0	33	66.0	64.0
14	28.0	26.0	34	68.0	66.0
15	30.0	28.0	35	70.0	68.0
16	32.0	30.0	36	72.0	70.0
17	34.0	32.0	37	74.0	72.0
18	36.0	34.0	38	76.0	74.0
19	38.0	36.0	39	78.0	76.0
20	40.0	38.0	40	80.0	78.0

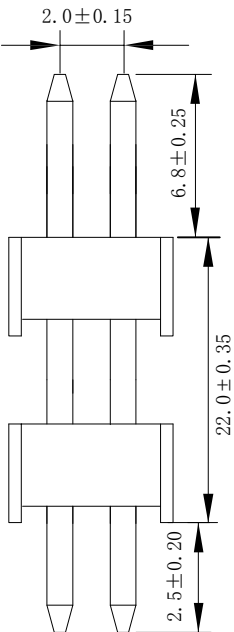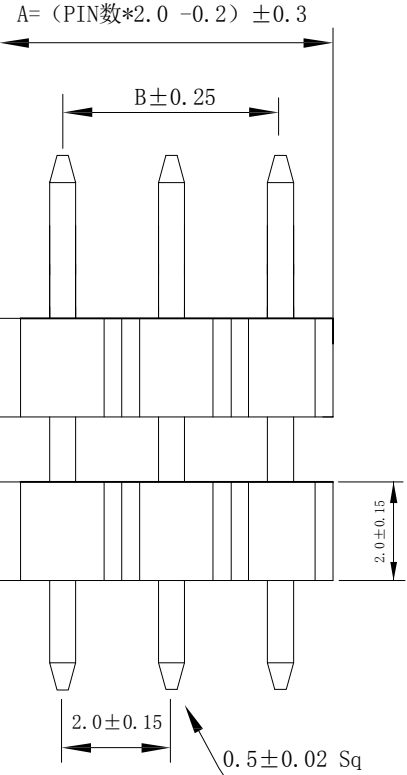

SPECIFICATIONS

Current rating:1Amps
Insulator Resistance:5000Megohms min
Dielectric withstanding:AC 500V
Contact material:Brass
Operating temperature:-40~+105℃
Max processing temp:230° To 260° for30-60 seconds
Insulator material:nylon-6T
PLTATING:GOLD FLASH
UNSPECIFIED TOLERANCE:±0.20



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号PART NO: EST2004WR-1*NPB-X

品名 TITLE: DB2.0双塑双排直针

材料: 单位: MM 包装规格: 比例: 1:1

制图: 审核: 核准: 日期: 2022.6.11

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
ANGLE ±1°



XCL