




■ SPECIFICATIONS

- Voltage rating: 100V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 800V AC/minute;
- Insulation resistance: 1000MΩ Min;
- Temperature range: -20℃ ~ +85℃;
- Contact resistance: 30mΩ Max;
- Wire size: AWG#22~#28;
- Qty: 9000PCS/Reel;
- Material: C2680;

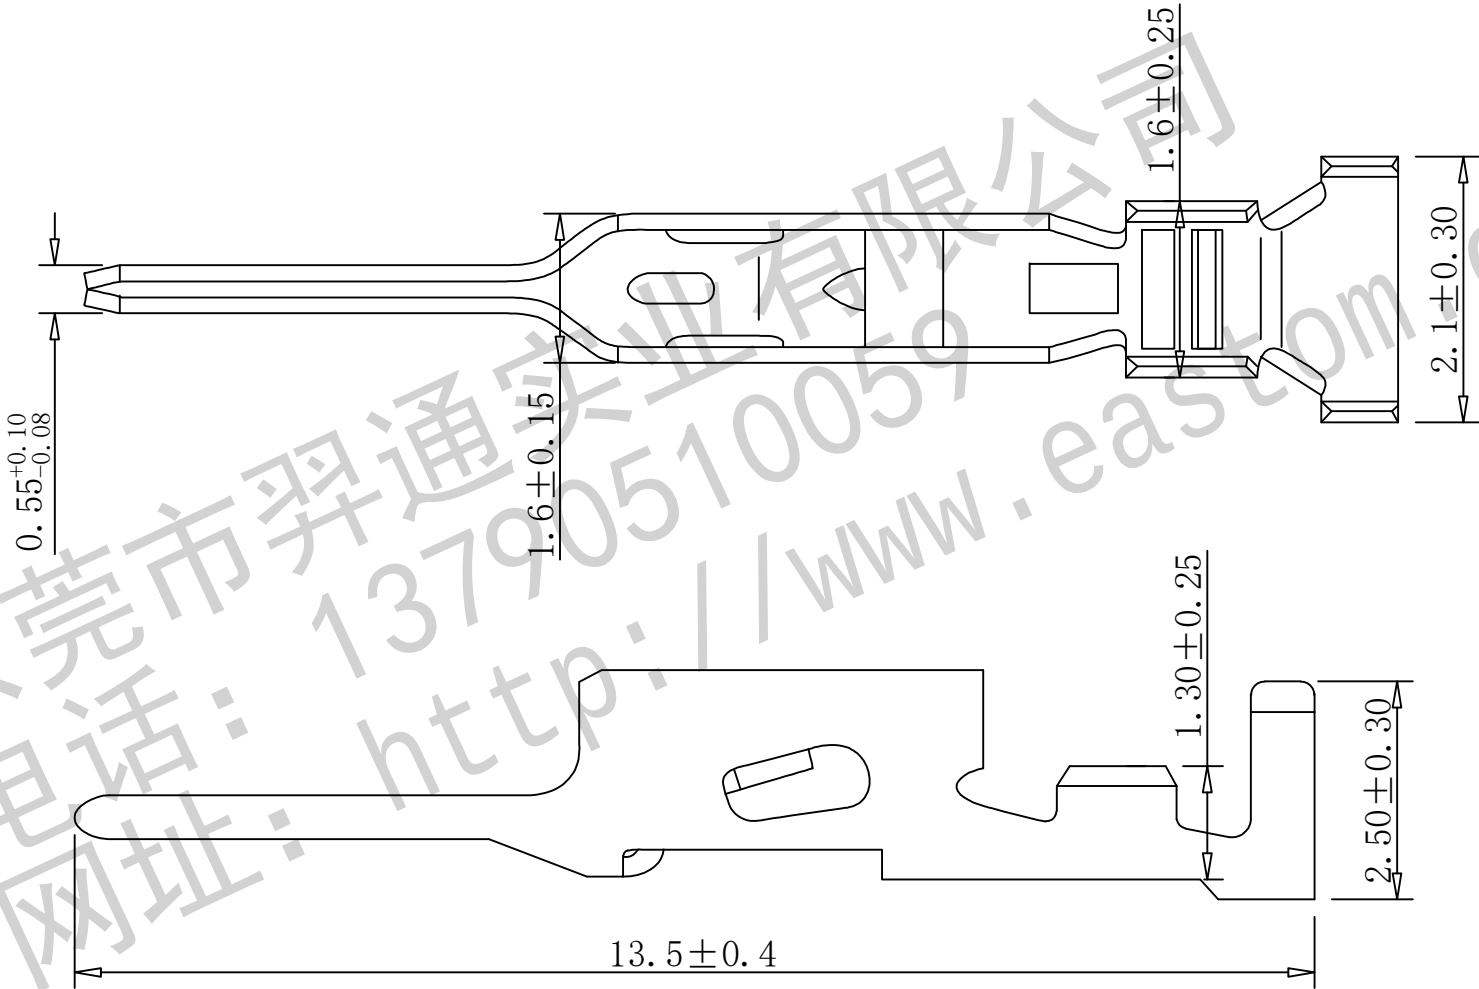

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST2012TPX-2X-X

品名 TITLE: 2012-T公

材料:

单位:

MM

包装规格:

比例:

1:1

制图:


审核:

核准:

日期:

2025. 8. 4

一般公差
GENERAL TOLERANCE
X, X ±0.25
X, XX ±0.20
ANGLE ±1°



F

E

D

C

B

A

F



E

D

C

B

A

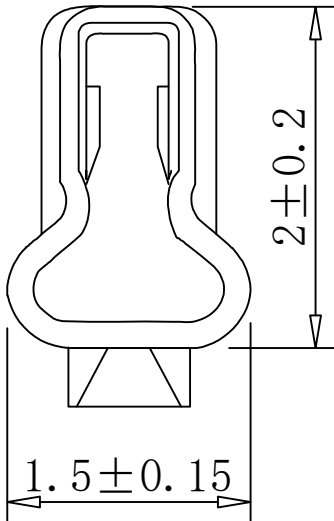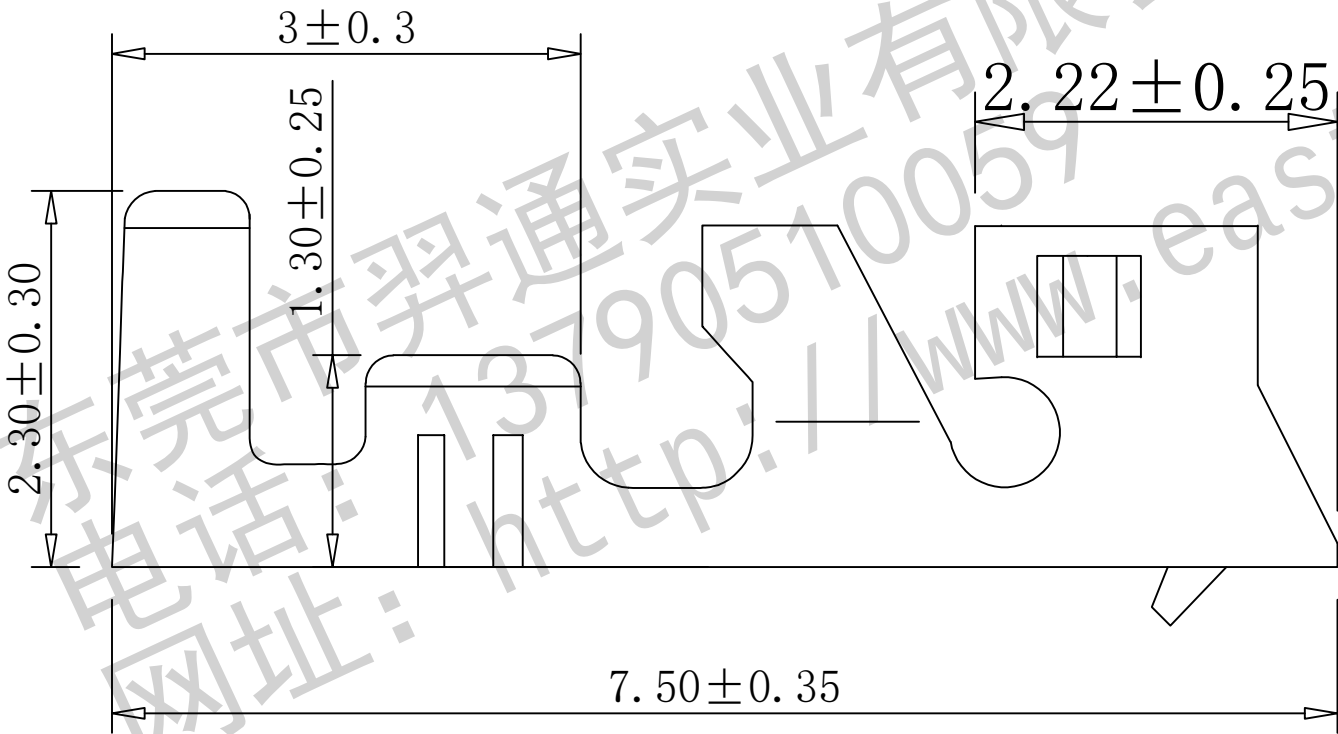

SPECIFICATIONS

- Voltage rating:100V AC/DC;
- Current rating:3A AC/DC;
- Withstanding Voltage:800V AC/minute;
- Insulatin resistance:1000MΩ Min;
- Temperature range:-20℃~+85℃;
- Contact resistance:30mΩ Max;
- Wire size: AWG#22~#28;
- Qty:8000PCS/Reel;
- Material:C5191;



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2012TPX-2X-G

品名 TITLE: 2012-T母

材料:

单位:

MM

包装规格:

比例:

1:1

制图:


审核:

核准:

日期:

2025. 8. 4

一般公差
GENERAL TOLERANCE
X. X ±0.25
X. XX ±0.20
ANGLE ±1°



版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

13790510059

5

4

3

2

1

F

E

D

C

B

A

F




E

D

C

B

A

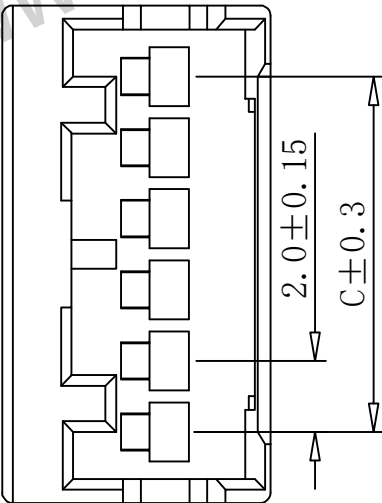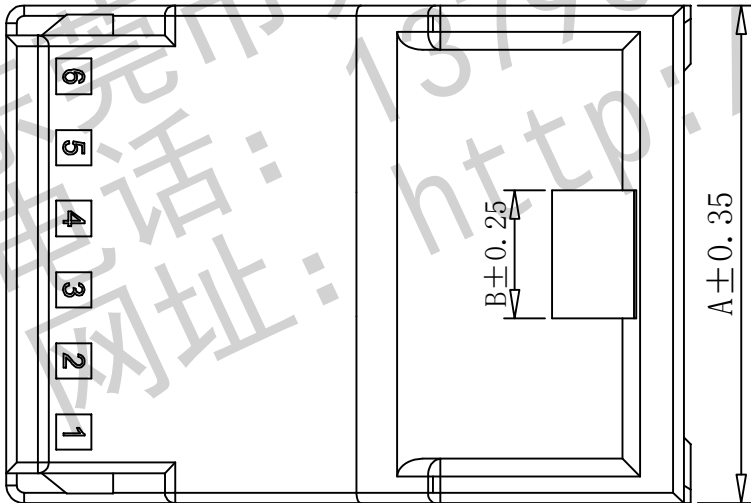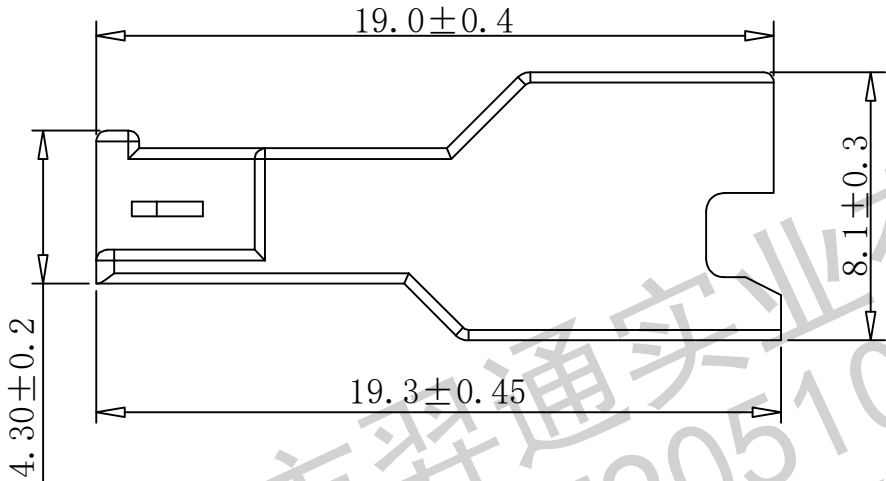

Poles	Dimensions		
	A	B	C
02P	6.0	1.50	2.00
03P	8.0	2.00	4.00
04P	10.0	3.00	6.00
05P	12.00	3.00	8.00
06P	14.00	3.50	10.00
08P	18.00	3.50	14.00
10P	22.00	3.50	18.00
12P	26.00	3.50	22.00
14P	30.00	3.50	26.00
15P	32.00	3.50	28.00

■ SPECIFICATIONS

- Voltage rating:100V AC/DC;
- Current rating:3A AC/DC;
- Withstanding Voltage:800V AC/minute;
- Insulatin resistance:1000MΩ Min;
- Temperature range:-20℃~+85℃;
- Contact resistance:30mΩ Max;
- Wire size: AWG#22~#28;
- Qty:1000PCS/Bag;
- Material:PA66 UL94-V0;



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2012H-1*NPX-B-G

品名 TITLE: 2012-H母

材料:

单位:

MM

包装规格:

比例:

1:1

制图:

审核:

核准:

日期:

2025. 8. 4


版次
REVISION

日期
DATE

变更内容
DESCRIPTION

核 准
APPROVALBY

一般公差
GENERAL TOLERANCE
X. X ±0.25
X. XX ±0.20
ANGLE ±1°



XDYT

13790510059

5

4

3

2

1

F

E

D

C

B

A

F


E

D

C

B

A

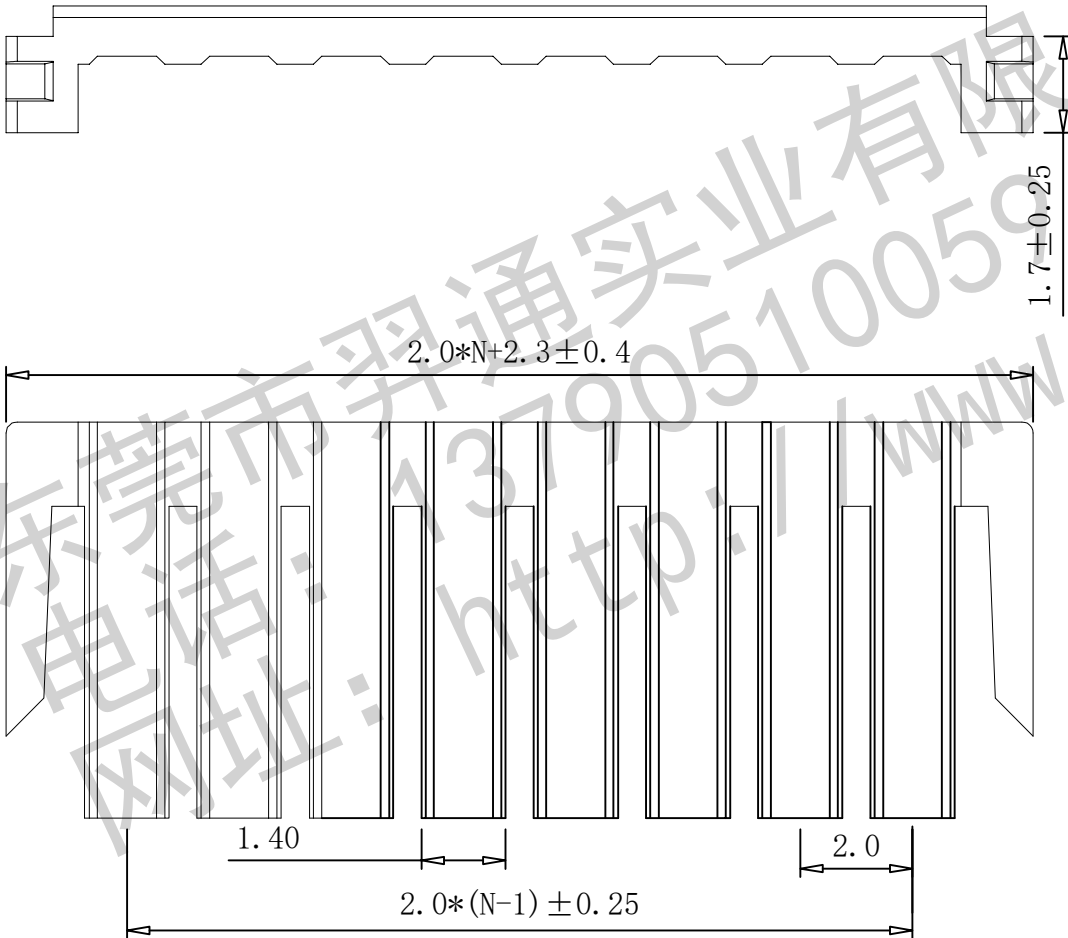

SPECIFICATIONS

- Voltage rating: 100V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 800V AC/minute;
- Insulation resistance: 1000MΩ Min;
- Temperature range: -20℃ ~ +85℃;
- Contact resistance: 30mΩ Max;
- Qty: 1000PCS/Bag;
- Material: PA66 UL94-V0;



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST2012H-1*NPX-F-X

品名 TITLE: 2012塞子

材料:

单位:

MM

包装规格:

比例:

1:1

制图:


审核:

核准:

日期:

2025. 8. 4

一般公差
GENERAL TOLERANCE
X, X ±0.25
X, XX ±0.20
ANGLE ±1°



XDYT

6

5

4

3

2

1

13790510059



5

4


3

2




1

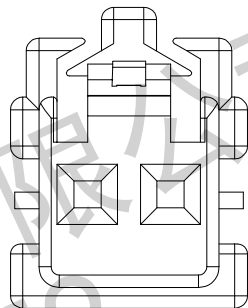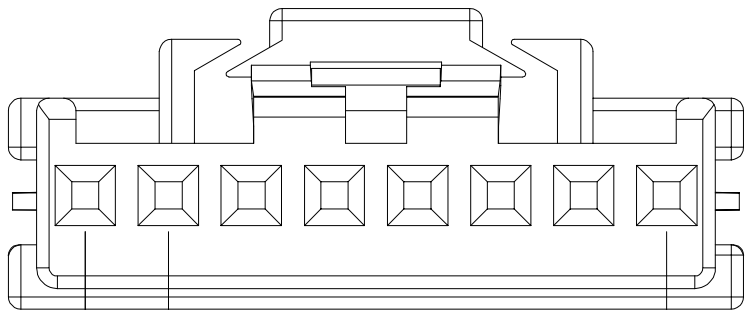

2Pin

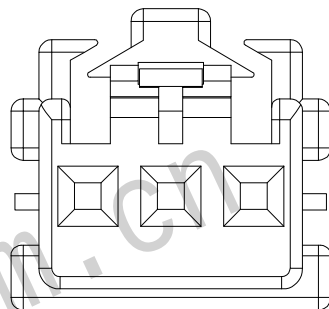

3Pin

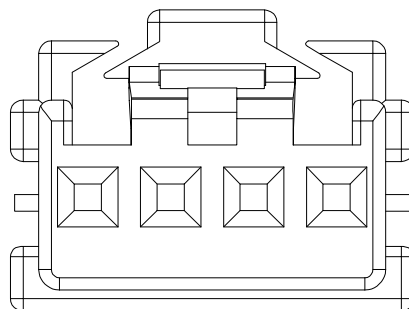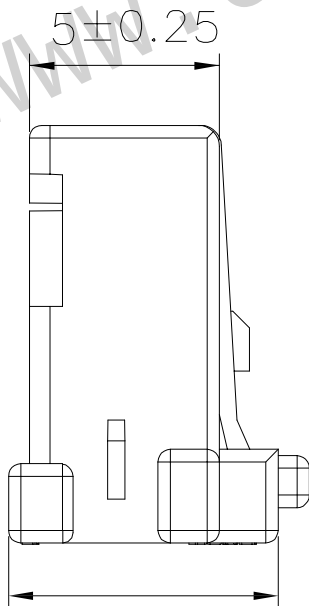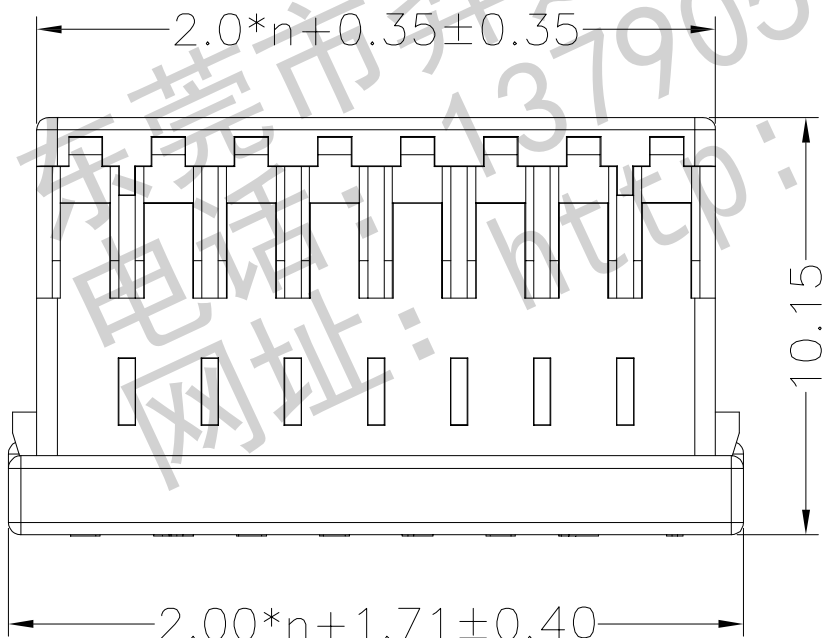

4Pin

■SPECIFICATIONS

- Voltage rating:100V AC/DC;
- Current rating:3A AC/DC;
- Withstanding Voltage:800V AC/minute;
- Insulation resistance:1000MΩ Min;
- Temperature range:-20℃~+85℃;
- Contact resistance:30mΩ Max;
- Qty:1000PCS/Bag;
- Material:PA66 UL94-V0;

版次	日期	变更内容	核 准
REVISION	DATE	DESCRIPTION	APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2012H-1*NPX-X-X

品名 TITLE: 2012-H公

材料:

单位:

MM

包装规格:

比例:

1:1

制图:


审核:

核准:

日期:

2025. 8. 4

一般公差
GENERAL TOLERANCE
X. X ±0.25
X. XX ±0.20
ANGLE ±1°



XDYT