

13790510059

5

4

3

2

1

5.40

0.20±0.03

"A" "B" Important size

A	B
1.45	1.35
1.60	1.70

A
B11.4±0.35
7.55±0.30

1.30

3.90

0.35

3.30

0.70

EST2024 T P X - 2 X- X

异通代码+间距

T示意端子

X普通脚

H高脚

E增高型脚

P磷铜

B黄铜

E合金铜

0素材

2镀锡先冲后镀

3镀锡先镀后冲

4镀全镍(镀后冲)

4.2镀全镍先冲后镀

5G、15G示意镀金5U"或15U", 1G示意镀金1U"

X公端


6母端

C示意90°

S示意180°

0.64
1.09


*2.43±0.25



SECTION: A-A


SCALE 1:1

*A±0.2




SECTION: B-B

SCALE 1:1

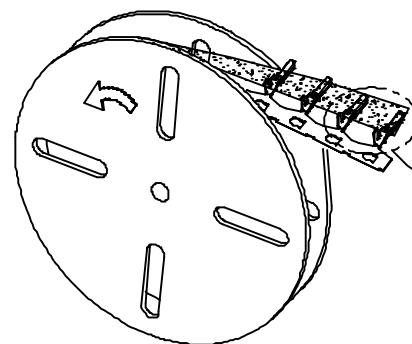

After Plating

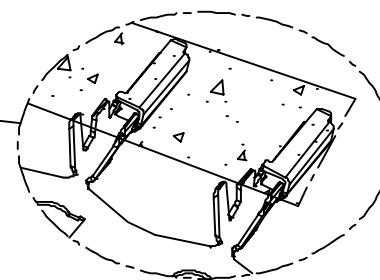

SCALE 4:1

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 20mΩ Max

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2024TPX-2X-G

品名 TITLE: 2024-T

材料:

单位: MM

包装规格:


比例: 1:1

制图:

审核:

核准:

日期: 2022. 3. 13

版次
REVISION日期
DATE变更内容
DESCRIPTION核 准
APPROVAL BY一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°

13790510059

5

4

3

2

1

SL