




05P~15P Shape
Scale 1:1

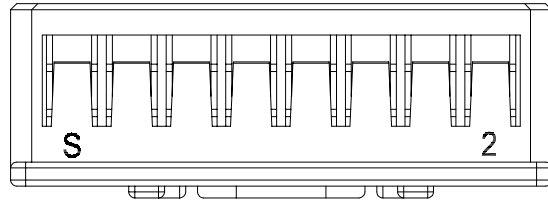

03P~04P Shape
Scale 0.8:1



02P Shape
Scale 0.8:1

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	8.00	2.00	09	20.10	16.00
03	8.10	4.00	10	22.10	18.00
04	10.10	6.00	11	24.10	20.00
05	12.10	8.00	12	26.10	22.00
06	14.10	10.00	13	28.10	24.00
07	16.10	12.00	14	30.10	26.00
08	18.10	14.00	15	32.10	28.00

EST2026 H - 1*NP X - B - X - HF-NK - X

↑ 羿通代码+间距

↑ X 普通
B 带扣
C 刺破
2L 示意两侧带锁扣
U 超薄防呆型
HV 带高凸点
LC 带低凸点,
K 卡槽
E 有耳

↑ X 胶壳
G 母胶壳

↑ NO MARK

↑ A 灼热丝750
B 灼热丝850
X 普通料

↑ PIN数
1 示意单排
2 示意双排

↑ H 示意胶壳,
H 后无数字默认材质V0
H 后带数字2 示意材质V2

↑ HF 示意无卤
NF 普通含卤

- Specifications :
- Voltage rating: 125V AC / DC
 - Current rating: 3A AC / DC
 - Withstanding voltage: 500V AC/minute
 - Temperature range: -40°C~+105°C
 - Insulation resistance: ≥1000MΩ
 - Contact resistance: ≤10mΩ
 - After environmental testing: ≤20mΩ
 - Material(Pin): Brass
 - Mates With EST Housing : 2026H



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2026H-1*NPX-X-X

品名 TITLE: 2026-H

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:



核准:

日期: 2022. 10. 20

一般公差
GENERAL TOLERANCE
X, X ±0.25
X, XX ±0.20
ANGLE ±1°



F

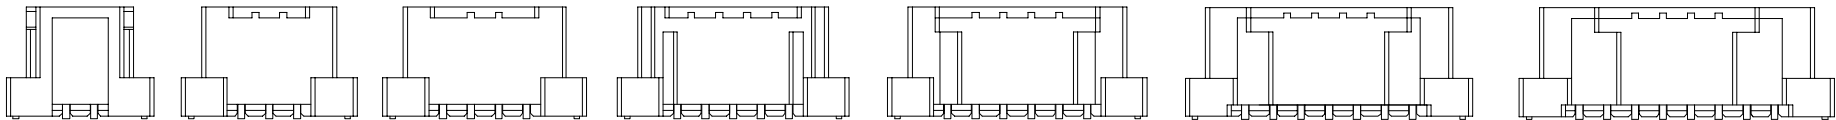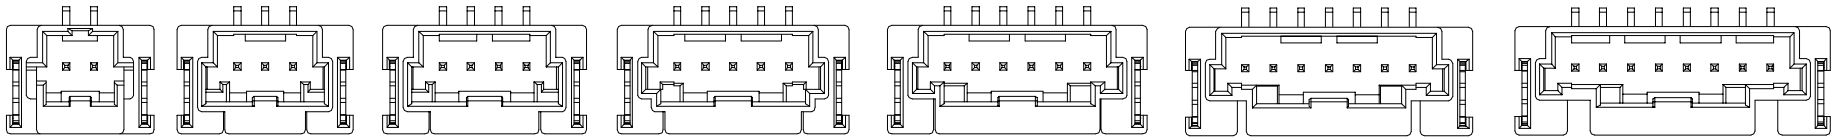

2pin

3pin

4pin



5pin

6pin

7pin

8pin

E

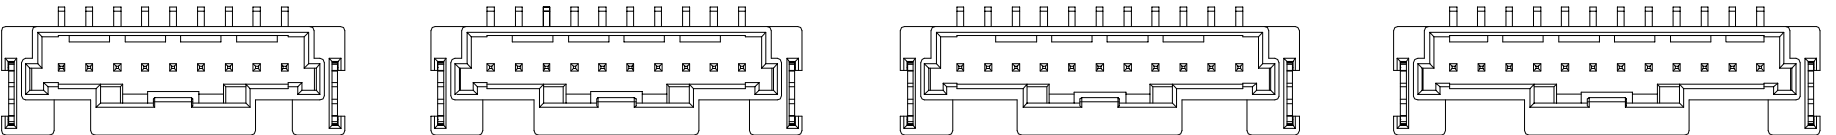

9pin



10pin

11pin

12pin

D

C

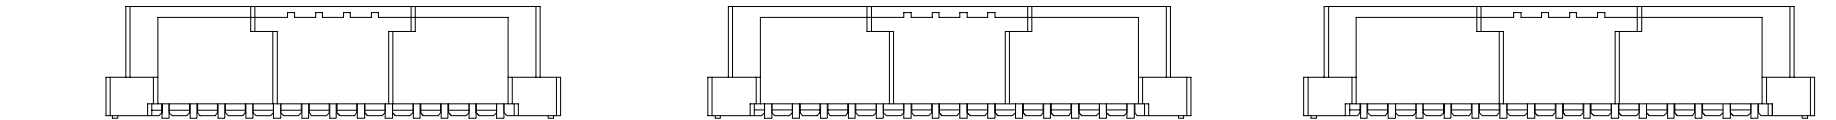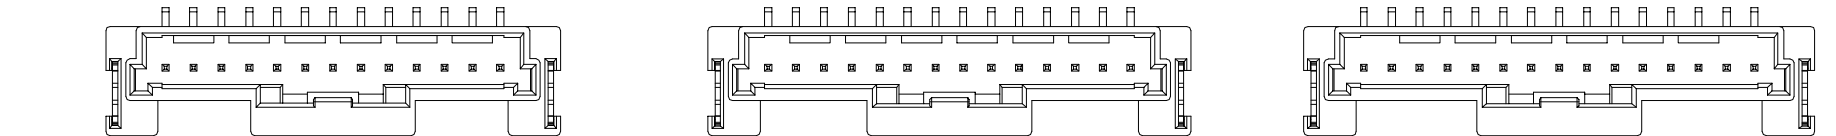

13pin

14pin

15pin

B

- Specifications :
- Voltage rating: 125V AC / DC
 - Current rating: 3A AC / DC
 - Withstanding voltage: 500V AC/minute
 - Temperature range: -40°C~+105°C
 - Insulation resistance: ≥1000M Ω
 - Contact resistance: ≤10mΩ
 - After environmental testing : ≤20mΩ
 - Material(Pin) : Brass
 - Mates With EST Housing : 2026H

日期版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2026H-1*NPX-X-X

品名 TITLE: 2026-H

材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2022. 10. 20

一般公差
GENERAL TOLERANCE
X. X ±0.25
X. XX ±0.20
ANGLE ±1°



F

E

D

C

B

A