

13790510059



5

4

3

2

1

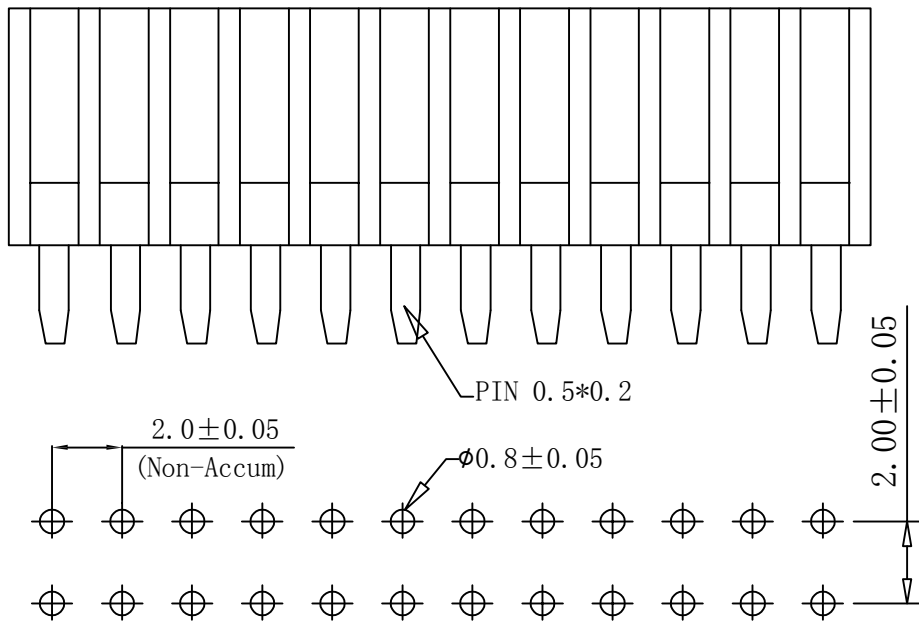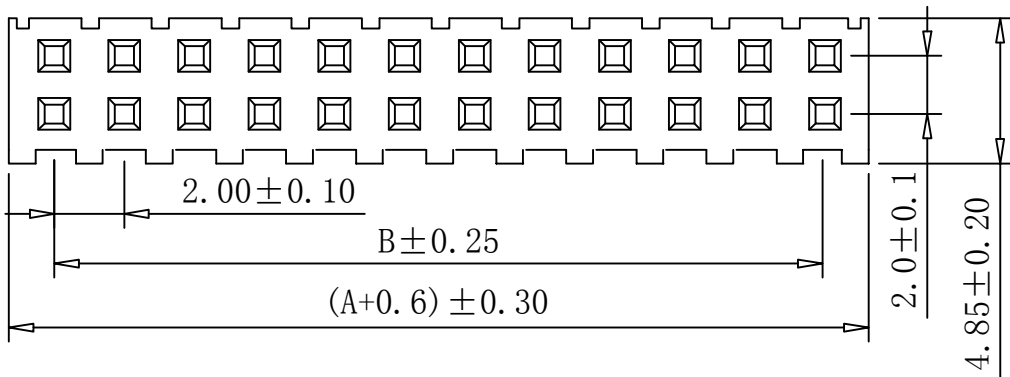

PCB Layout

Dimensions list

Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
1	2.0	0	21	42.0	40.0
2	4.0	2.0	22	44.0	42.0
3	6.0	4.0	23	46.0	44.0
4	8.0	6.0	24	48.0	46.0
5	10.0	8.0	25	50.0	48.0
6	12.0	10.0	26	52.0	50.0
7	14.0	12.0	27	54.0	52.0
8	16.0	14.0	28	56.0	54.0
9	18.0	16.0	29	58.0	56.0
10	20.0	18.0	30	60.0	58.0
11	22.0	20.0	31	62.0	60.0
12	24.0	22.0	32	64.0	62.0
13	26.0	24.0	33	66.0	64.0
14	28.0	26.0	34	68.0	66.0
15	30.0	28.0	35	70.0	68.0
16	32.0	30.0	36	72.0	70.0
17	34.0	32.0	37	74.0	72.0
18	36.0	34.0	38	76.0	74.0
19	38.0	36.0	39	78.0	76.0
20	40.0	38.0	40	80.0	78.0

■ SPECIFICATIONS

- Dielectric Withstanding: AC 500V;
- Current rating: 3A Mps;
- Withstanding Voltage: 1000V AC/minute
- Temperature range: -20℃ ~ +85℃
- Contact resistance: 30mΩ Max
- Contact Material: Phosphor bronze
- Plating: Gold flash
- Insulator Material: NY-6T
- UNSPECIFIED TOLERANCE: ±0.20



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2041WV-2*NPX-F-X

品名 TITLE: 2041排母 (双排)

材料:

单位:

MM

包装规格:

比例:

1:1

制图:


审核:

核准:

日期:

2025.1.10

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
ANGLE ±1°



版次
REVISION

日期
DATE

变更内容
DESCRIPTION

核 准
APPROVAL BY

6

5

4

3

2

1

XCL