


Poles	A	B	C	D
1*2P	7.30	2.50	3.50	5.70
1*3P	9.80	5.00	6.00	8.20
1*4P	12.30	7.50	8.50	10.70
1*5P	14.80	10.00	11.00	13.20
1*6P	17.30	12.50	13.50	15.70
1*7P	19.80	15.00	16.00	18.20
1*8P	22.30	17.50	18.50	20.70
1*9P	24.80	20.00	21.00	23.20
1*10P	27.30	22.50	23.50	25.70
1*11P	29.80	25.00	26.00	28.20
1*12P	32.30	27.50	28.50	30.70
1*13P	34.80	30.00	31.00	33.20
1*14P	37.30	32.50	33.50	35.70
1*15P	39.80	35.00	36.00	38.20
1*16P	42.30	37.50	38.50	40.70

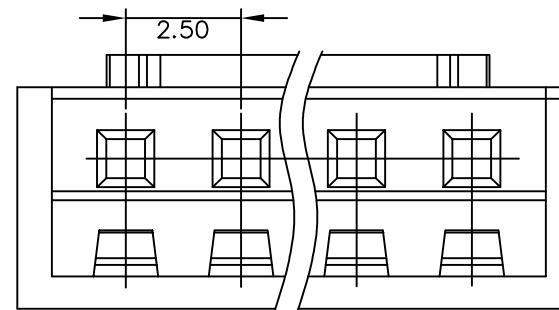

EST2501 H - 1*NP X - B - X - HF-NK - X
 码通代码+间距 X普通壳 X公胶壳 NO MARK A灼热丝750
 X本色 B黑色 R红色 L蓝色 Y黄色 G绿色 C透明 PIN数
 B带扣 C侧扣 2L示意两侧带锁扣 HF示意无卤
 R带扣 F防呆型 U带扣 HV带高凸点 LC带低凸点 K卡槽 E耳 NF普通含卤
 L带扣 G带扣 U带扣 HF示意无卤
 1示意单排 2示意双排
 H示意胶壳, H后无数字默认材质V0
 H后带数字2示意材质V2

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 20mΩ Max

				料号PART NO: EST2501H-1*NPX-X-X				GENERAL TOLERANCE X.X ± 0.30 X.XX ± 0.20 ANGLE ± 1°	
				品名 TITLE: XH2.5-H公 (无扣)					
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 淮 APPROVALBY	材料: PA66	单位: MM	数量/包: 1000pcs	Scale: 1:1	APPD:	DATE: 2023/03/16
6	5	4	3	DR: CHKD: APPD:				2	1 EST