

13790510059




5

4

3

2

1

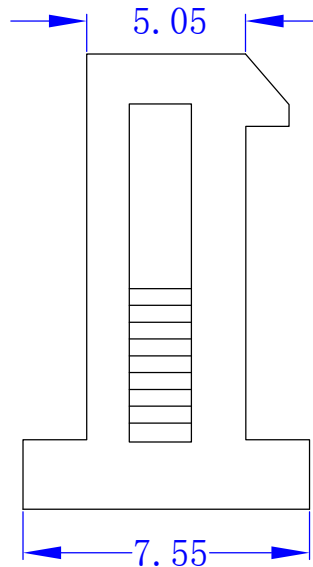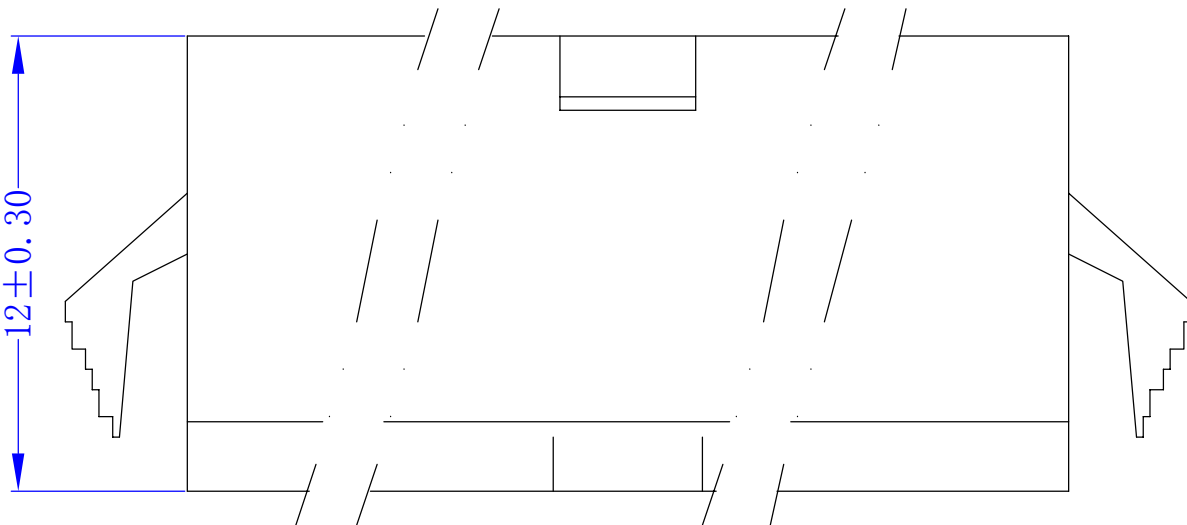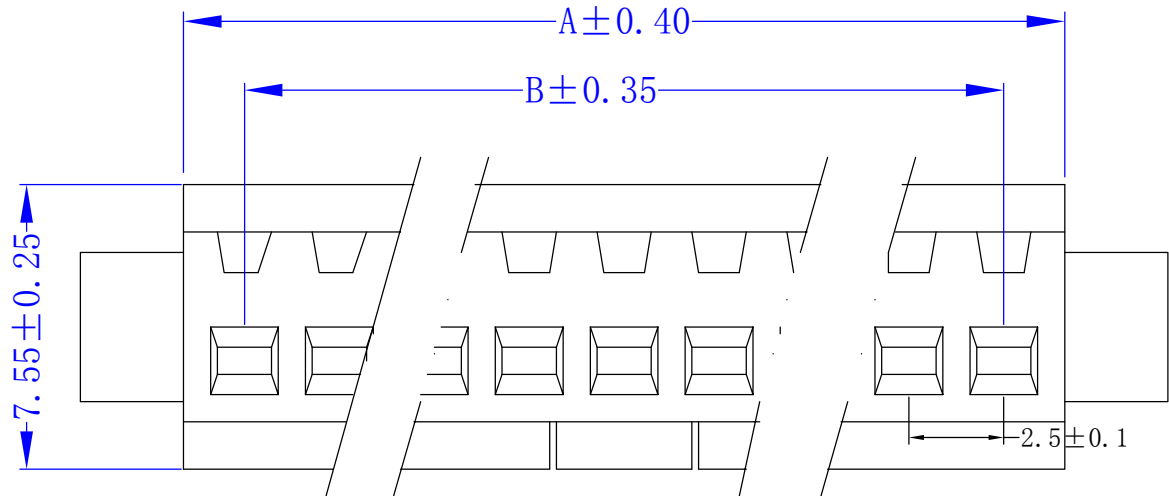

EST2507 H - 1*NP X - B - X - HF-NK - X

↑ 羿通代码+间距 ↑ PIN数 ↑ X本色 ↑ X普通 ↑ X公胶壳 ↑ NO MARK ↑ A灼热丝750

↑ B黑色 ↑ C刺破 ↑ 2L示意两侧带锁扣 ↑ U超薄F防呆型 ↑ HV带高凸点 ↑ LC带低凸点 ↑ K卡槽 ↑ E有耳 ↑ B灼热丝850

↑ R红色 ↑ L蓝色 ↑ Y黄色 ↑ G绿色 ↑ C透明 ↑ HF示意无卤 ↑ NF普通含卤 ↑ X普通料

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

PART NO	A	B
02	5.6	2.5
03	8.1	5.0
04	10.6	7.5
05	13.1	10.0
06	15.7	12.5
07	18.3	15.0
08	20.8	17.5
09	23.2	20.0
10	25.8	22.5
11	28.3	25.0
12	30.8	27.5

■ SPECIFICATIONS

- Poles: 2~16p
- Voltage rating: 250V AC/DC;
- Current rating: 3.0A AC/DC;
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 20mΩ Max
- Applicable wire: AWG#28~#22
- Applicable PC board thickness: 0.5~02.0mm

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2507H-1*NPX-B-X

品名 TITLE: SM2.5-H公

材料: PA66

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2023-8-30

一般公差
GENERAL TOLERANCE
X. X ±0.35
X. XX ±0.30
ANGLE ±1°



6

5

4

3

2

1

YL