


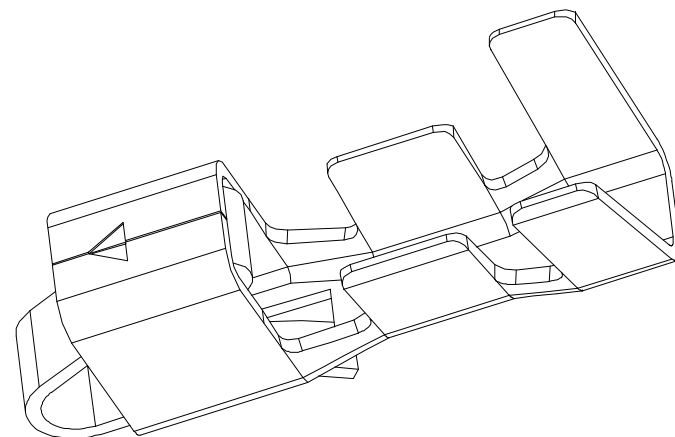

Section: B-B

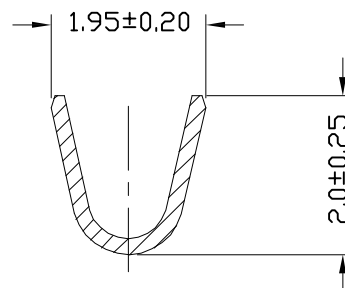


Diagram illustrating the layout and specifications of various components on a PCB:

- EST2507**: 界通代码+间距 (Boundary code + spacing)
- T**: T 示意端子 (T indicates terminal)
- P**: P 磷铜 (P Phosphor copper), B 黄铜 (B Brass), E 合金铜 (E Alloy copper)
- X**: X 普通脚 (X General foot), H 高脚 (H High foot), E 增高型脚 (E Height increasing foot)
- 2**: 0 素材 (0 Material), 2 镀锡先冲后镀 (2 Tin plating first, then plating), 3 镀锡先镀后冲 (3 Tin plating first, then plating), 4 镀金领(镀后冲) (4 Gold plating (plating after plating)), 4.2 镀金领先冲后镀 (4.2 Gold plating first, then plating), 5G、15G 示意镀金 (5G、15G indicates gold plating)
- X-**: X 普通 (X General), L 长 (L Long), S 短 (S Short), U 超薄 (U Ultra-thin)
- X**: X 公端 (X Public end), G 母端 (G Female end), C 示意90° (C indicates 90°), S 示意180° (S indicates 180°)

日期版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2022/7/2

一般公差	
GENERAL TOLERANCE	
X.X	± 0.30
X.XX	± 0.25
ANGLE	$+1^\circ$

