

13790510059




5

4


3

2



1

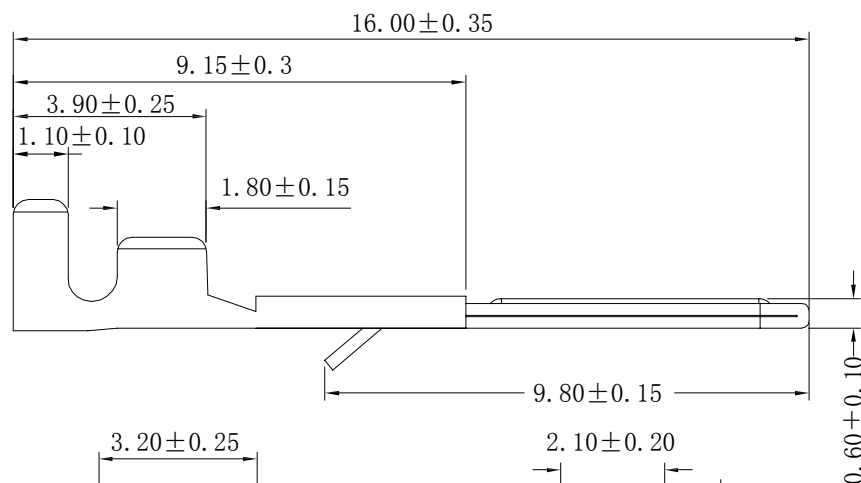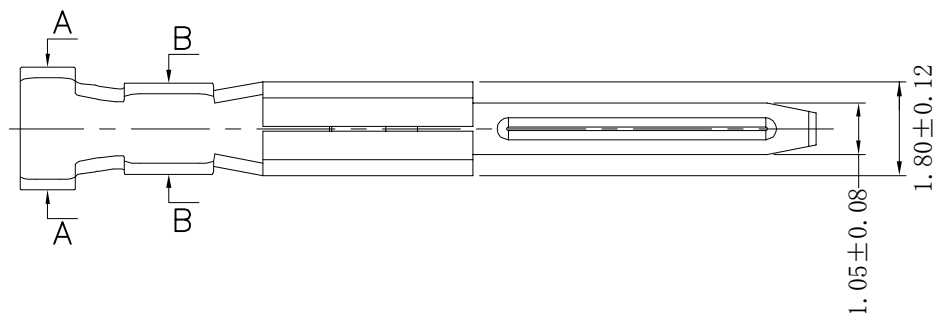

Section: A-A



Section: B-B

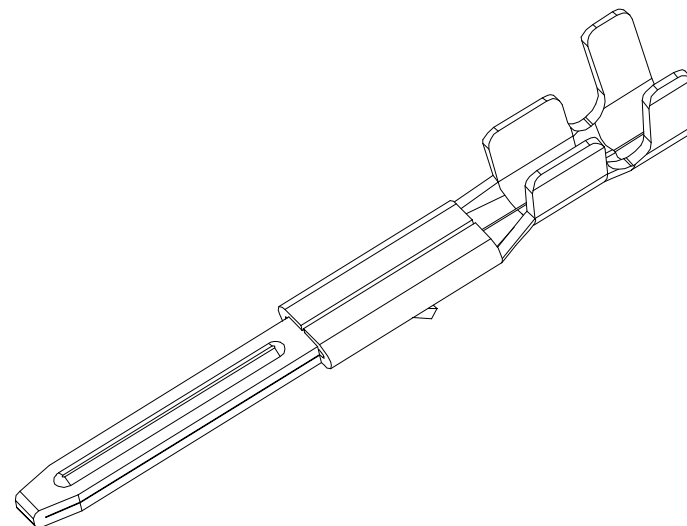

EST2507 T P X - 2 X- X

羿通代码+间距

T示意端子

X普通脚
H高脚
E增高型脚P磷铜
B黄铜
E合金铜0素材
2镀锡先冲后镀
3镀锡先镀后冲
4镀全镍(镀后冲)
4.2镀全镍先冲后镀
5G、15G示意镀金5U"或15U", 1G示意镀金1U"X公端
G母端
C示意90°
S示意180°X普通
L长
S短
U超薄

SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:3A AC/DC;
- Withstanding Voltage:1500V AC/minute
- Insulatin resistance:500MΩ Min
- Temperature range:-25℃~+85℃
- Contact resistance:10mΩ Max

日期版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2507TPX-2X-X

品名 TITLE: SM2.5-T公

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2022/7/2

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°



YL