

13790510059




5

4

3

2

1

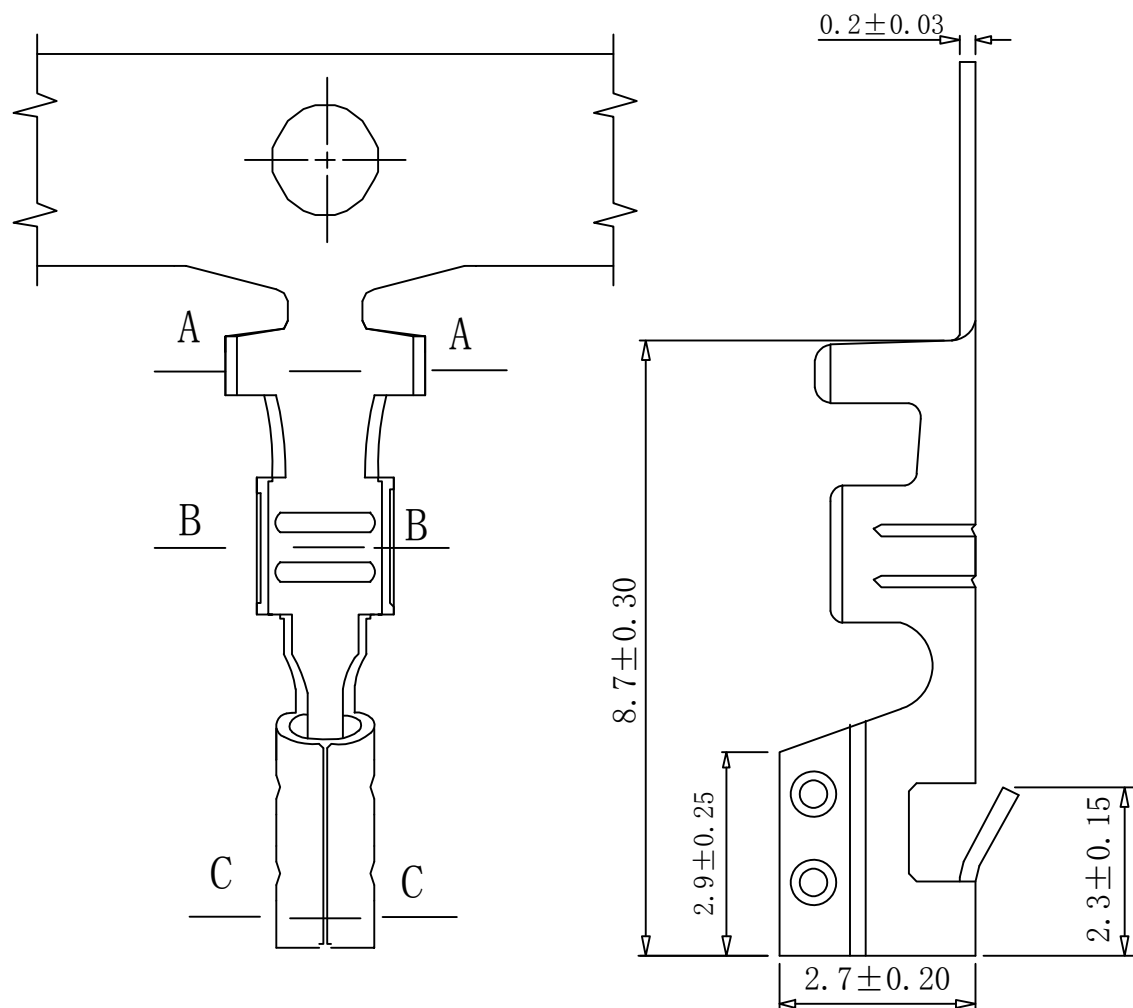

EST2509 T P X - 2 X - X

↑
贯通代码+间距↑
T示意端子↑
X普通脚
H高脚
E增高型脚

0素材

2镀锡先冲后镀

3镀锡先镀后冲

4镀全镍(镀后冲)

4.2镀全镍先冲后镀

5G、15G示意镀金50"或150", 1G示意镀金1U"

↑
X公端
G母端
C示意90°
S示意180°

PRODUCT SPECIFICATON

1. Material: BRONZE
2. Temperature range: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$
3. Current rating: 2A AC/DC
4. Contact resistance: $10\text{m}\Omega$ MAX
5. Insulation resistance: $1000\text{M}\Omega$ MIN
6. Withstand voltage: 1000V AC/Minute
7. Applicable wire: AWG #28 TO #22



东莞市昇通实业有限公司

DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2509TPX-2X-G

品名 TITLE: 5240-T母

材料: BRONZE

单位:

MM

包装规格: 7K/ROLL

比例:

1:1

制图:

审核:

核准:

日期:

2023/8/13

一般公差
GENERAL TOLERANCE
X. X ± 0.30
X. XX ± 0.20
ANGLE $\pm 1^{\circ}$



YL