

13790510059




5

4


3

2

1

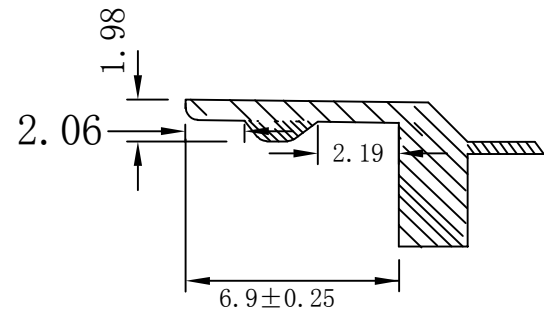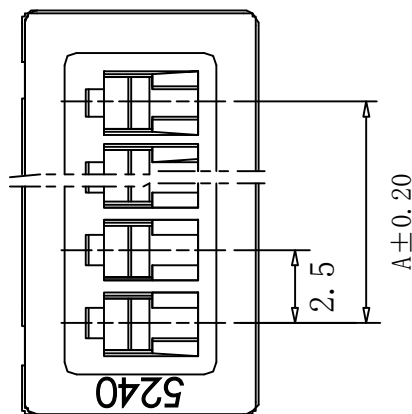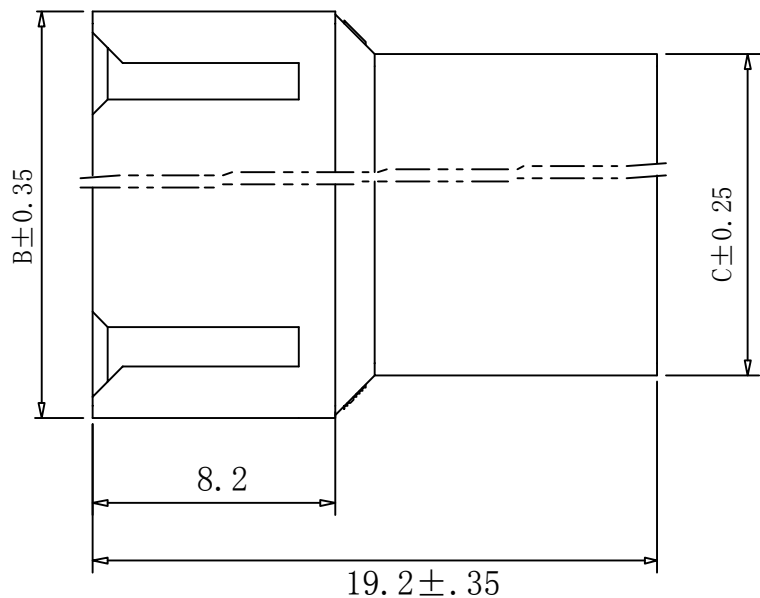

SECTION A---A

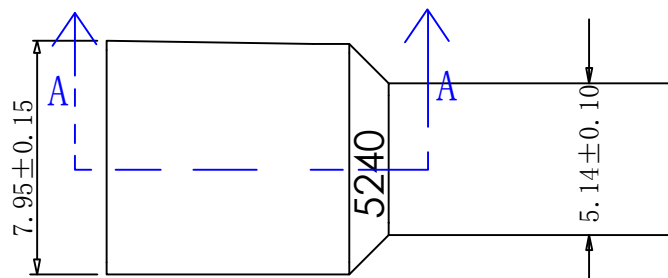

Poles	dimensions mm		
	A	B	C
2	2.5	8.67	5.85
3	5.0	11.17	8.35
4	7.5	13.67	10.85

EST2509	H	-	1*NP	X	-	X	-	G	-	HF-NK	-	X
↑ 羿通代码+间距	↑ PIN数 1示意单排 2示意双排		↑ X本色 B黑色 R红色 L蓝色 Y黄色 G绿色 C透明	↑ X普通 B带扣 C刺破 2L示意两侧带锁扣 U超薄F防呆型 HV带高凸点 LC带低凸点, K卡槽 E有耳		↑ X公胶壳 G母胶壳		↑ NO MARK		↑ HF示意无卤 NF普通含卤		↑ A灼热丝750 B灼热丝850 X普通料

PRODUCT SPECIFICATON

1. Material: PA66 94-V0
2. Temperature range: -25°C ~ 85°C
3. Current rating: 2A AC/DC
4. Contact resistance: 10mΩ MAX
5. Insulation resistance: 1000MΩ MIN
6. Withstand voltage: 1000V AC/Minute
7. Applicable wire: AWG #28 TO #22



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2509H-1*NPB-X-G

品名 TITLE: 5240-H母

材料: PA66

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2023/2/15

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.20
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

