

13790510059

5

4

3

2

1

F



E

D



C

B

A

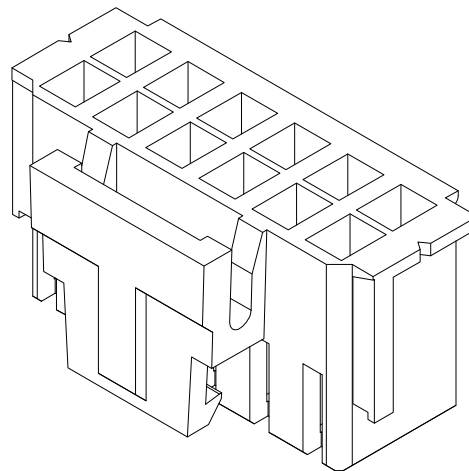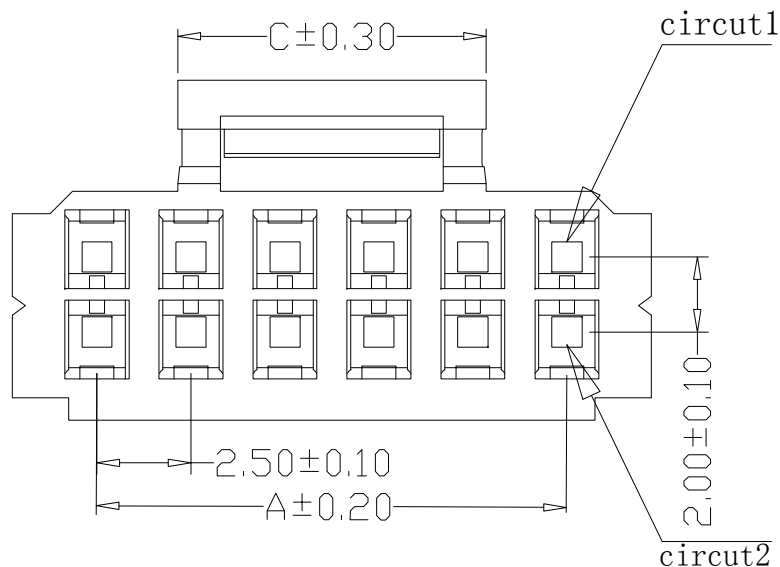

PIN	尺寸 (MM)			
	A	B	C	D
2*2	2.50	7.00	3.00	4.90
2*3	5.00	9.50	3.00	7.40
2*4	7.50	12.00	5.40	9.90
2*5	10.00	14.50	7.90	12.40
2*7	15.00	19.50	10.40	17.40
2*8	17.50	22.00	10.40	19.90
2*9	20.00	24.50	15.40	22.40
2*10	22.50	27.00	15.40	24.90
2*11	25.00	29.50	15.40	27.40
2*12	27.50	32.00	15.40	29.90
2*13	30.00	34.50	20.40	32.40
2*14	32.50	37.00	20.40	34.90
2*15	35.00	39.50	20.40	37.40
2*16	37.50	42.00	20.40	39.90
2*17	40.00	44.50	20.40	42.40
2*18	42.50	47.00	20.40	44.90
2*19	45.00	49.50	20.40	47.40
2*20	47.50	52.00	20.40	49.90

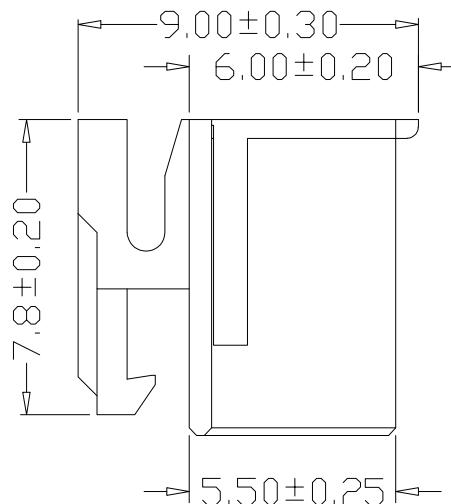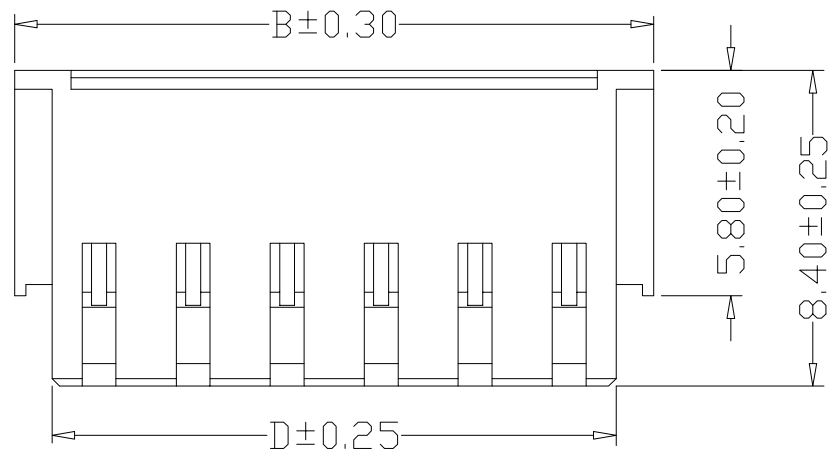

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 80V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 30mΩ Max

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST2525H-2*NPX-B

品名 TITLE: 2.5+2.0-H

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2024/08/08

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°



HY

13790510059

5

4

3

2

1

F






E

D

C

B

A

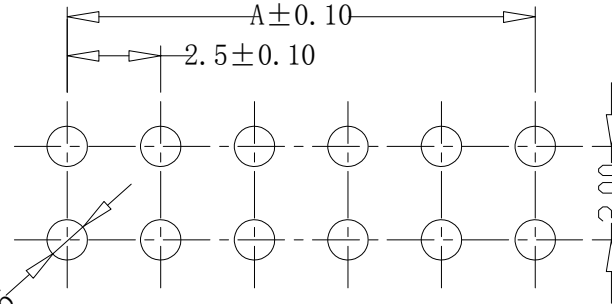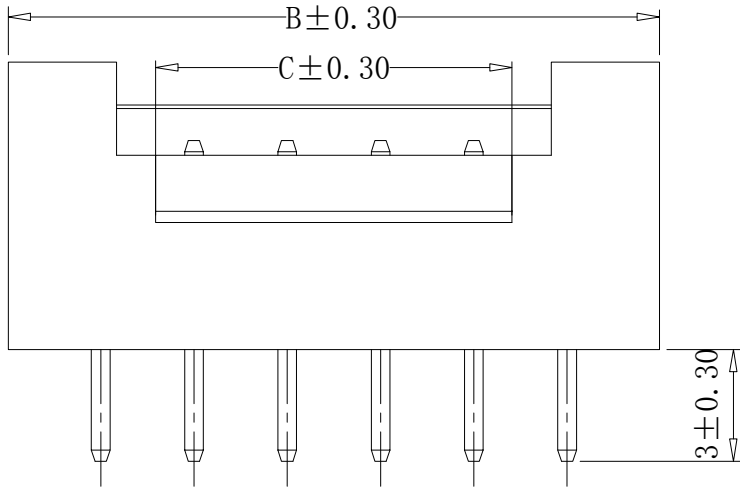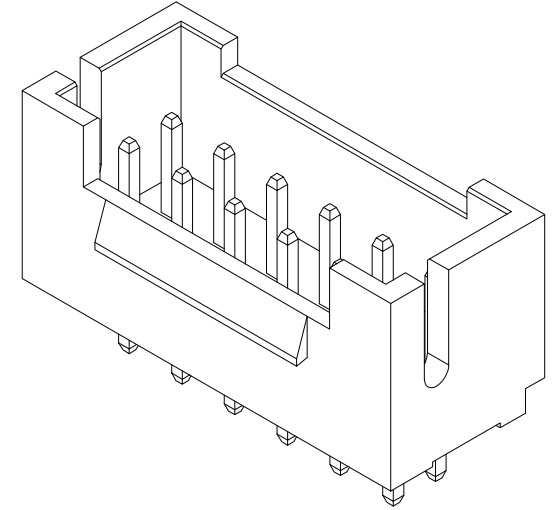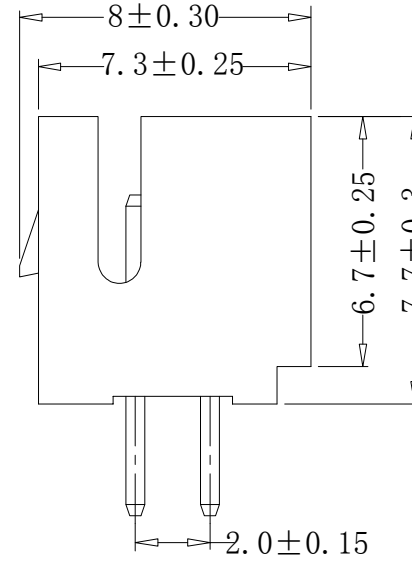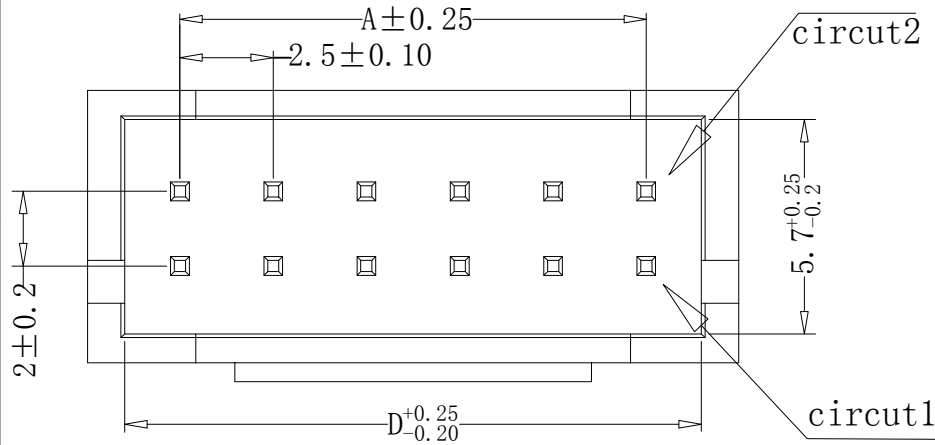

PIN	尺寸 (mm)			
	A	B	C	D
2*02	2.50	7.45	2.30	5.40
2*03	5.00	9.95	2.30	7.90
2*04	7.50	12.45	4.70	10.40
2*05	10.00	14.95	7.20	12.90
2*06	12.50	17.45	9.70	15.40
2*07	15.00	19.95	9.70	17.90
2*08	17.50	22.45	9.70	20.40
2*09	20.00	24.95	14.70	22.90
2*10	22.50	27.45	14.70	25.40
2*11	25.00	29.95	14.70	27.90
2*12	27.50	32.45	14.70	30.40
2*13	30.00	34.95	19.70	32.90
2*14	32.50	37.45	19.70	35.40
2*15	35.00	39.95	19.70	37.90
2*16	37.50	42.45	19.70	40.40
2*17	40.00	44.95	19.70	42.90
2*18	42.50	47.45	19.70	45.40
2*19	45.00	49.95	19.70	47.90
2*20	47.50	52.45	19.70	50.40

SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:3A AC/DC;
- Withstanding Voltage:80V AC/minute
- Insulatin resistance:1000MΩ Min
- Temperature range:-25℃~+85℃
- Contact resistance:30mΩ Max

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2525WV-2*NPX-B

品名 TITLE: 2.5+2.0直针

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2024/08/08

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.20
ANGLE ±1°



HY

13790510059

5

4

3

2

1

F




E

D

C

B

A

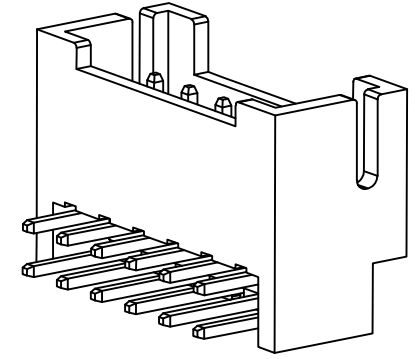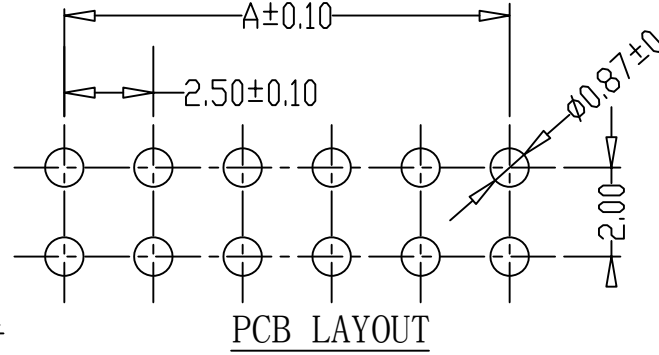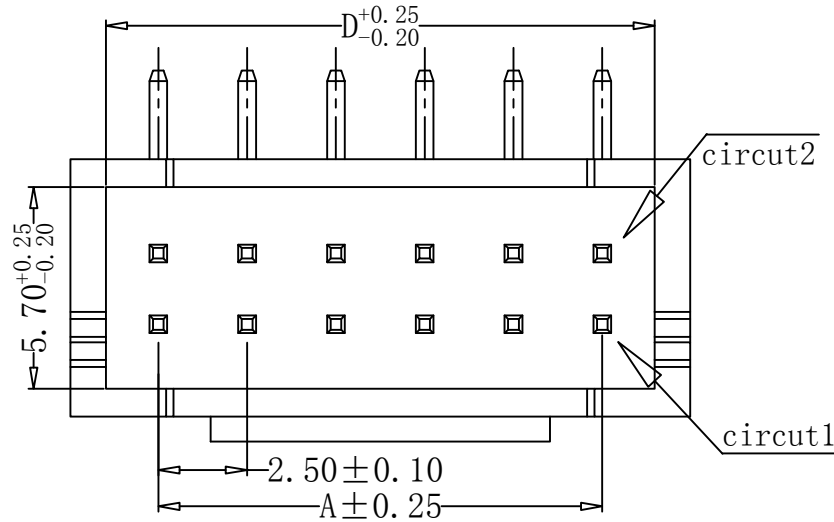

F



E

D

C

B

A

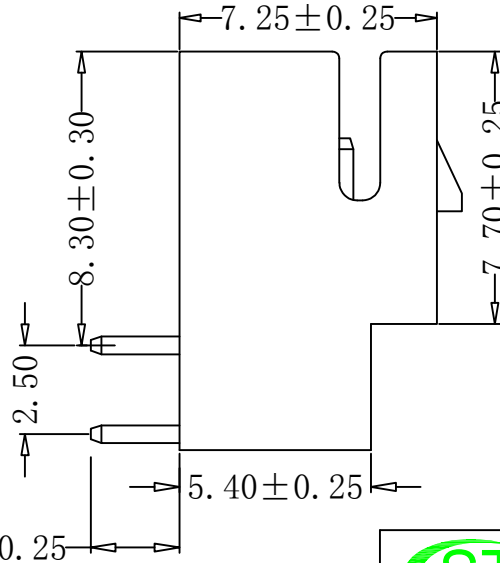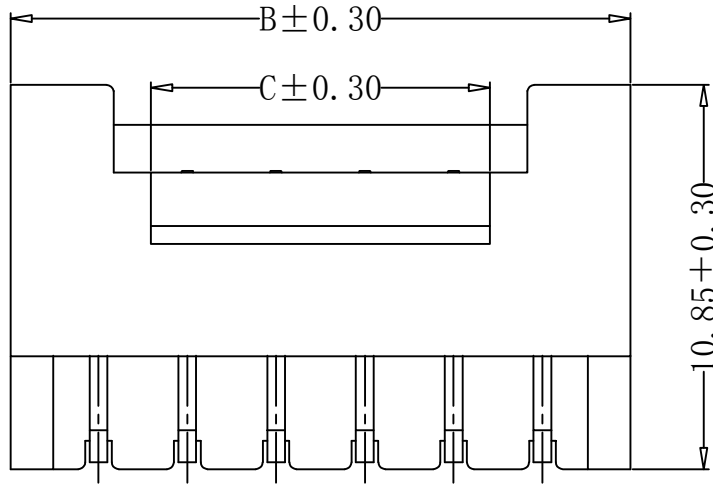

PIN	尺寸 (mm)			
	A	B	C	D
2*03	5.00	9.95	2.30	7.90
2*04	7.50	12.45	4.70	10.40
2*05	10.00	14.95	7.20	12.90
2*06	12.50	17.45	9.70	15.40
2*07	15.00	19.95	9.70	17.90
2*08	17.50	22.45	9.70	20.40
2*09	20.00	24.95	14.70	22.90
2*10	22.50	27.45	14.70	25.40
2*11	25.00	29.95	14.70	27.90
2*12	27.50	32.45	14.70	30.40
2*13	30.00	34.95	19.70	32.90
2*14	32.50	37.45	19.70	35.40
2*15	35.00	39.95	19.70	37.90
2*16	37.50	42.45	19.70	40.40
2*17	40.00	44.95	19.70	42.90
2*18	42.50	47.45	19.70	45.40
2*19	45.00	49.95	19.70	47.90
2*20	47.50	52.45	19.70	50.40

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 80V AC/minute
- Insulation resistance: 1000M Ω Min
- Temperature range: -25 $^{\circ}$ C ~ +85 $^{\circ}$ C
- Contact resistance: 30m Ω Max

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2525WR-2*NPX-B

品名 TITLE: 2.5+2.0弯针

材料:

单位:

MM

包装规格:

比例:

1:1

制图:


审核:

核准:

日期:

2024/08/08

一般公差
GENERAL TOLERANCE
X.X ± 0.30
X.XX ± 0.20
ANGLE $\pm 1^{\circ}$



HY

6

5

4

3

2

1