

13790510059

5

4

3

2

1

F

E

D

C

B

A

F






E

D

C

B

A

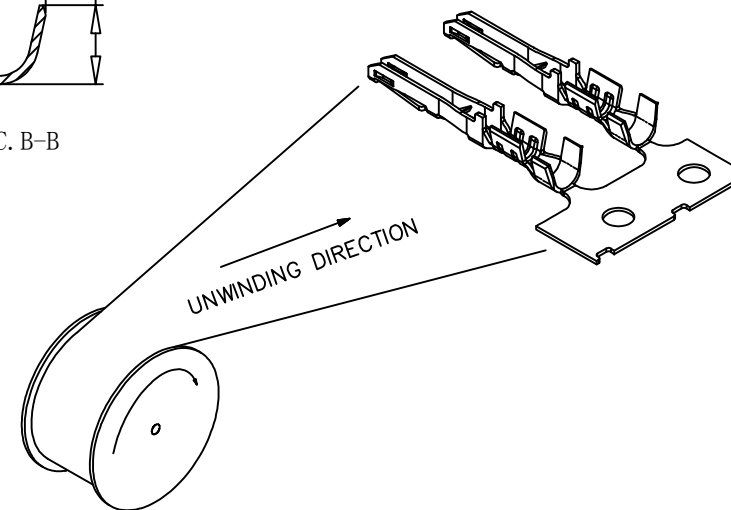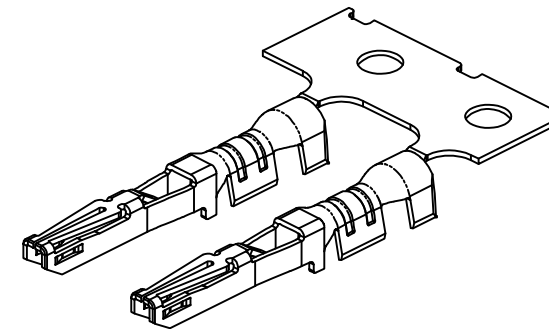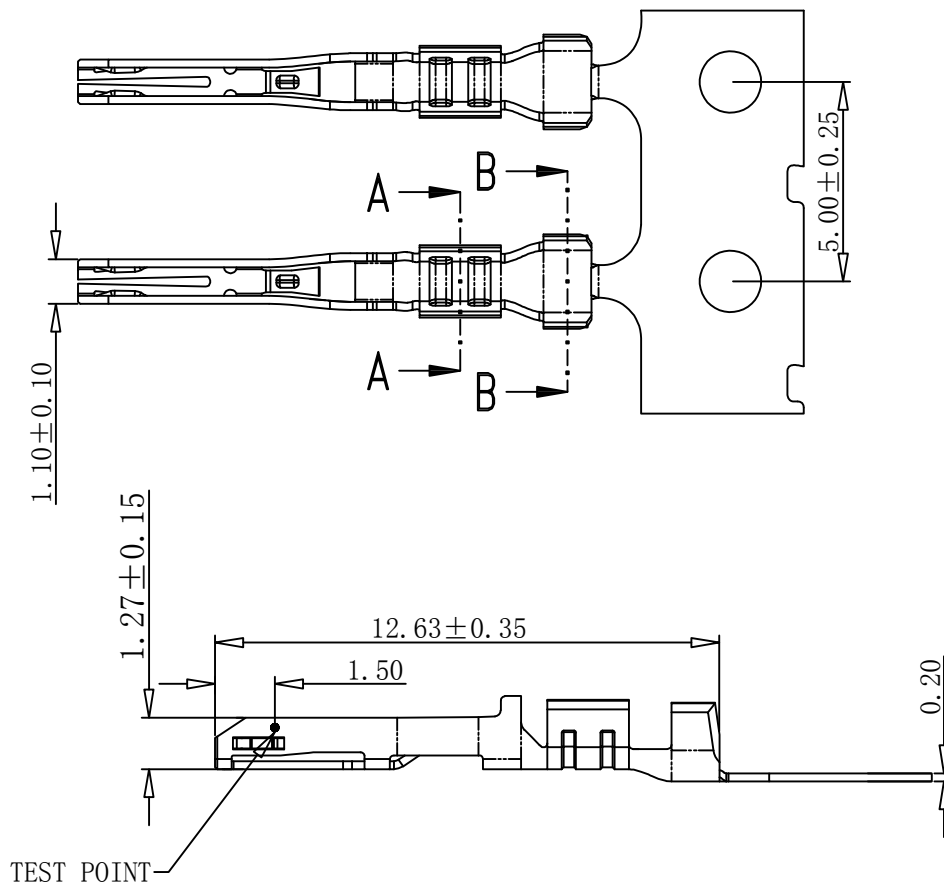**SPECIFICATIONS**

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: $1000M\Omega$ Min
- Temperature range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Contact resistance: $30m\Omega$ Max
- Material: Copper Alloy

Part NO.	Wire range	A	B	C	D
EST2526TPX-2X-G	#24-#26	1.39	1.45	2.12	2.00
EST2526TPH-2X-G	#20-#22	1.80	1.85	2.33	1.94

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2526TPX-2X-G

品名 TITLE: 2526-T

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2023. 6. 28

一般公差
GENERAL TOLERANCE
X. X ± 0.30
X. XX ± 0.25
ANGLE $\pm 1^{\circ}$



TAS

13790510059








5

4


3

2


1

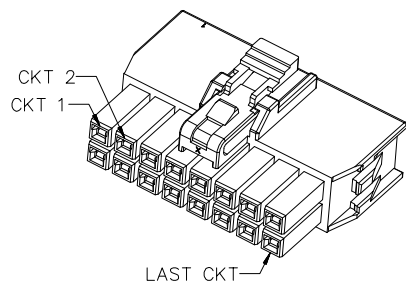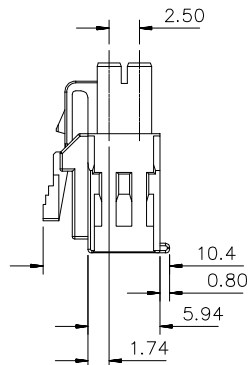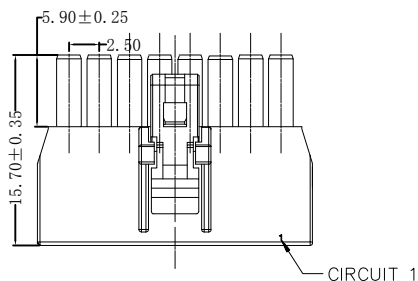


4 CKT




6 CKT




8 CKT




10 CKT



12 CKT



14 CKT

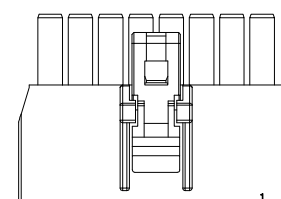

16 CKT

DIM 'A'	CKT SIZE	COLOR
7.70	4	BLACK (KEY A)
10.20	6	
12.70	8	
15.20	10	
17.70	12	
20.20	14	
22.70	16	NATURAL (KEY B)
32.70	24	
7.70	4	
10.20	6	
12.70	8	
15.20	10	
17.70	12	
20.20	14	
22.70	16	
32.70	24	

EST2526 H - 1*NP X - B - X

↑
羿通代码+间距↑
X公胶壳
G母胶壳X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

PIN数

1示意单排
2示意双排H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

SPECIFICATION:

- 1.Current Rating: 3A AC/DC Max
- 2.Voltage Rating: 250V AC/DC
- 3.Contact Resistance: 30mΩ Max
- 4.Insulation Resisitance: 1000MΩ min
- 5.Withstanding Voltage: 1500V AC/Minute
- 6.Temperature Range: -20℃ ~ + 85℃
- 7.Metarial:Nylon 66 or 4T+30%GF UL94V-0

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2526H-1*NPX-B

品名 TITLE: 2526-H带扣

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2023. 6. 28

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°

日期版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

6

5

4

3

2

1

TAS

13790510059



5

4



3

2

1

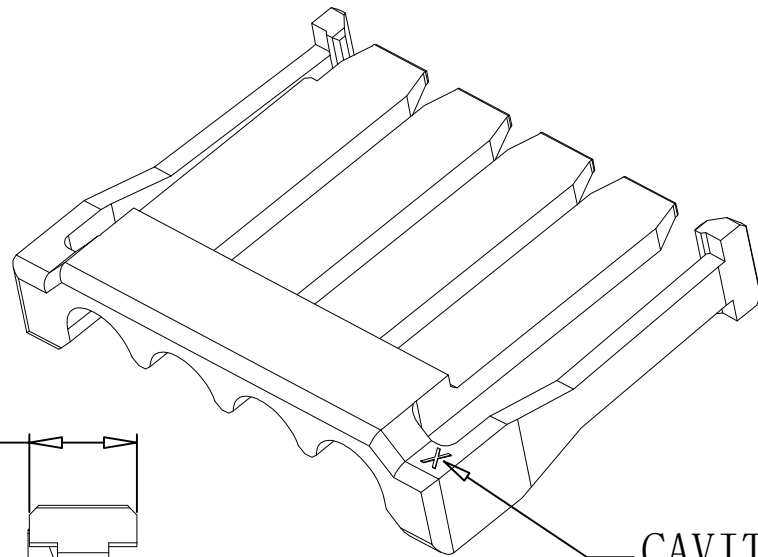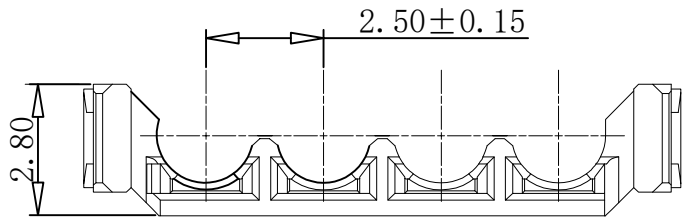

2.30 ± 0.25

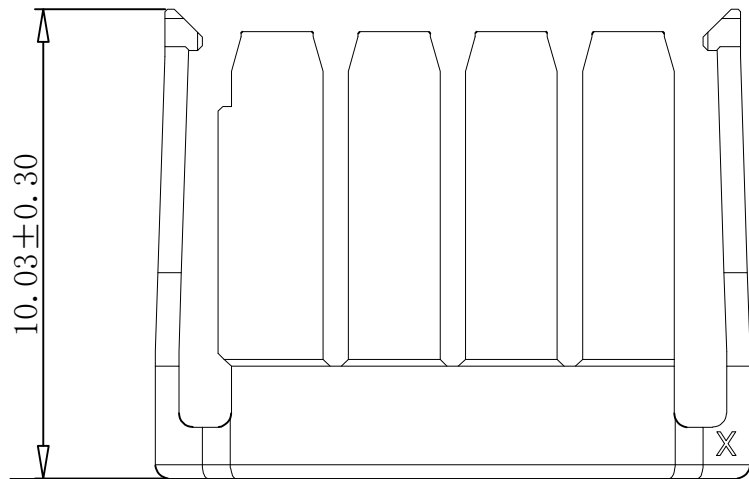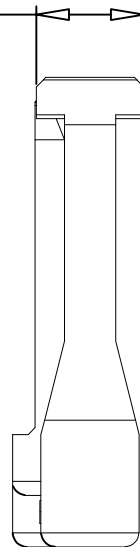

CAVITY NUMBER

PIN	A
2P	7.70
3P	10.20
4P	12.70
5P	15.20
6P	17.70
7P	20.20
8P	22.70

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 30mΩ Max
- Material: PA66+25GF V0



DGEASTOM

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2526H-1*NP

品名 TITLE: 2526尾塞

材料:

单位:

MM

包装规格:

比例:

1:1

审核:

核准:

日期:

2025. 10. 18

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
ANGLE ±1°

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVALBY

制图:

6

5















4

3

2

1

TAS

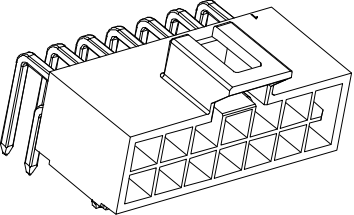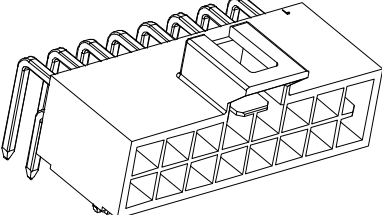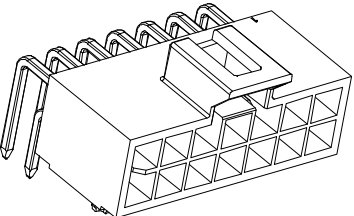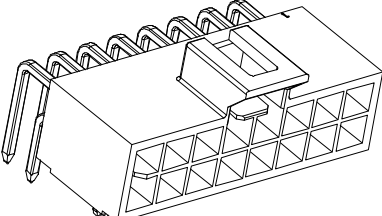	4 CKT	6 CKT	8 CKT	10 CKT
A Key Color: BLACK				
B Key Color: NATURAL				
	12 CKT	14 CKT	16 CKT	
A Key Color: BLACK				
B Key Color: NATURAL				

SPECIFICATION:

- 1.Current Rating: 3A AC/DC Max
- 2.Voltage Rating: 250V AC/DC
- 3.Contact Resistance: 30mΩ Max
- 4.Insulation Resisitance: 1000MΩ min
- 5.Withstanding Voltage: 1500V AC/Minute
- 6.Temperature Range: -20℃ ~ + 85℃
- 7.Metarial:Nylon 66 or 4T+30%GF UL94V-0



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2526WR-1*NPX-B

品名 TITLE: 2526弯针双排

材料:

单位: MM

包装规格:

比例: 1:1


制图:



审核:

核准:



日期: 2023. 6. 28

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°

日期版次
REVISION日期
DATE变更内容
DESCRIPTION核 准
APPROVALBY

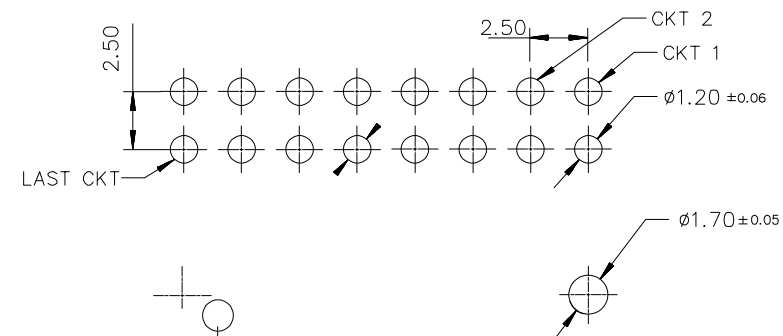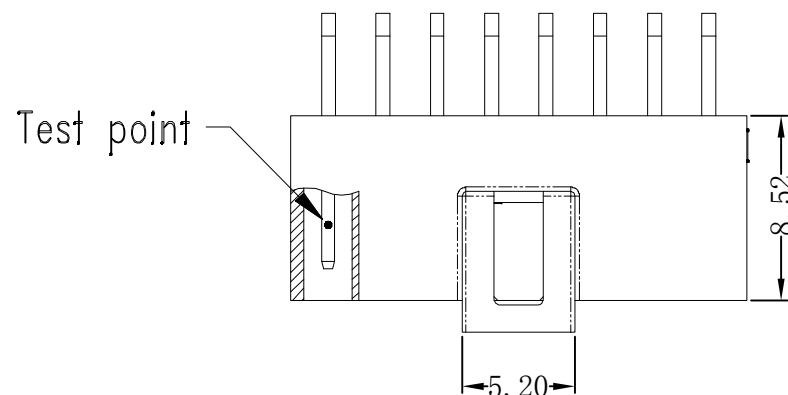

Recommended P. C. B. hole dimension
Recommended P. C. B. thickness 1.6 ~ 2.4mm

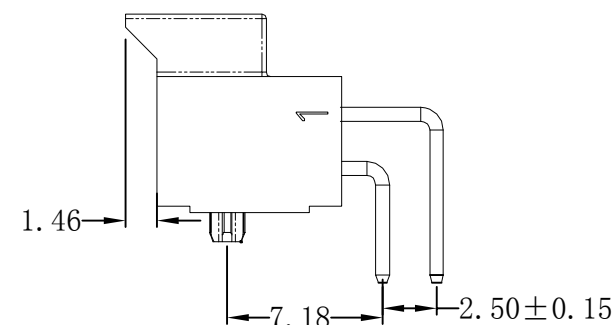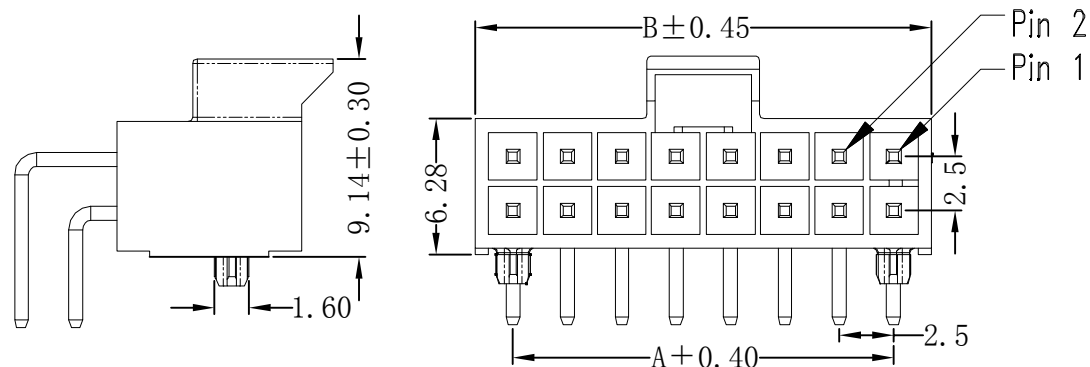

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
N	$1.25 \times N - 2.5$	$1.25 \times N + 0.94$

$$\&\& N = 4 \sim 24$$

SPECIFICATION:

- 1.Current Rating: 3A AC/DC Max
- 2.Voltage Rating: 250V AC/DC
- 3.Contact Resistance: 30mΩ Max
- 4.Insulation Resistance: 1000MΩ min
- 5.Withstanding Voltage: 1500V AC/Minute
- 6.Temperature Range: -40℃ ~ +105℃
- 7.Material:Nylon 66 or 4T+30%GF UL94V-0

				料号PART NO: EST2526WR-1*NPX-B				一般公差 GENERAL TOLERANCE
				品名 TITLE: 2526弯钉双排				X. X ±0.30 X. XX ±0.25
				材料:	单位: MM	包装规格:	比例: 1:1	ANGLE ±1°
日期版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	制图:	审核:	核准:	日期: 2023. 6. 28	