

13790510059



5

4



3

2

1

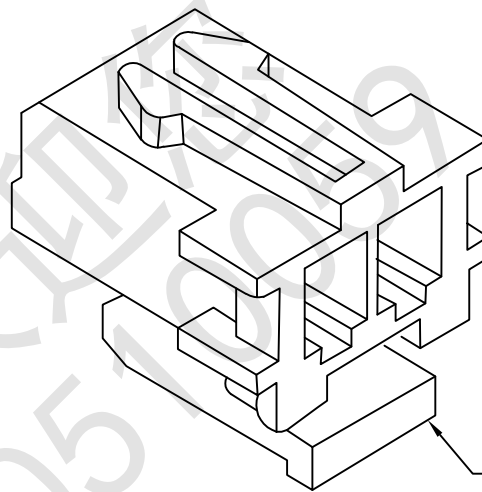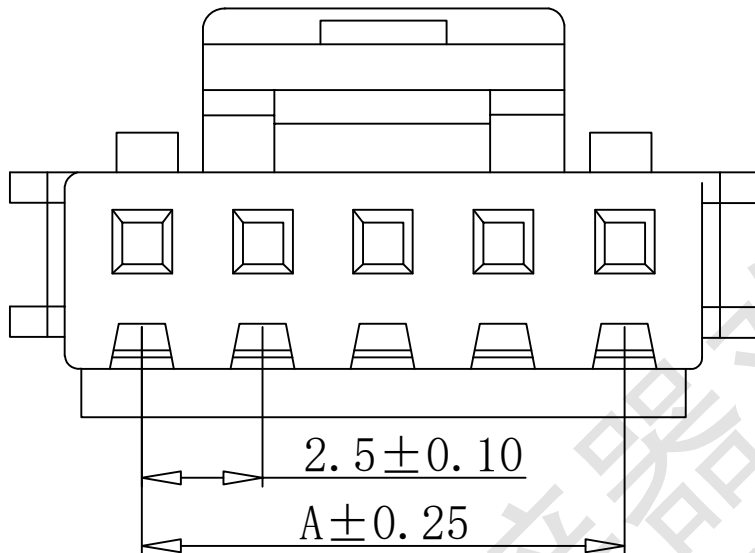

PIN	A	B
02	2.50	5.70
03	5.00	8.20
04	7.50	10.70
05	10.00	13.20
06	12.50	15.70
07	15.00	18.20
08	17.50	20.70
09	20.00	23.20
10	22.50	25.70
11	25.00	28.20
12	27.50	30.70
13	30.00	33.20
14	32.50	35.70
15	35.00	38.20

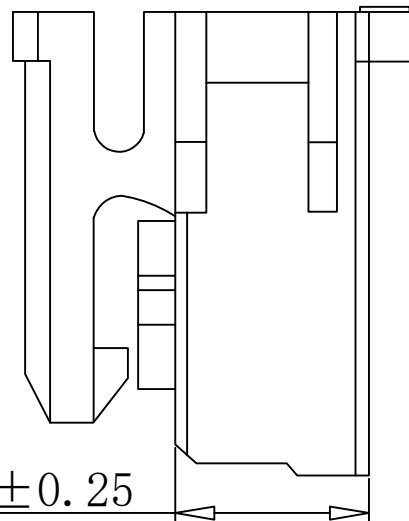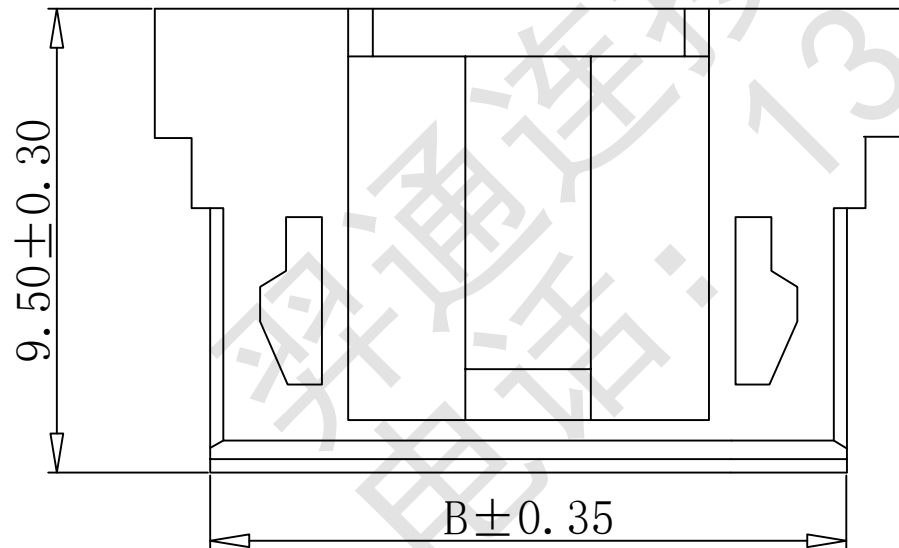

EST2531 H - 1*NP X - B - X

↑ 普通代码+间距 ↑ PIN数 ↑ X本色
B黑色 1示意单排 X公胶壳
R红色 2示意双排 G母胶壳
L蓝色 C带扣 L示意LOCK TYPE
Y黄色 L超薄防呆型 HV带高凸点
G绿色 LC带低凸点 K卡槽
C透明 E有耳

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 20mΩ Max
- Material: PA66 UL94-V0

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST2531H-1*NPX-B-X

品名 TITLE: 2531-H(公)

材料:

单位: MM

包装规格:

比例: 1:1

制图:


审核:

核准:

日期:

2025. 6. 19

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°



WLD

13790510059

5

4

3

2

1

F


E

D

C

B

A

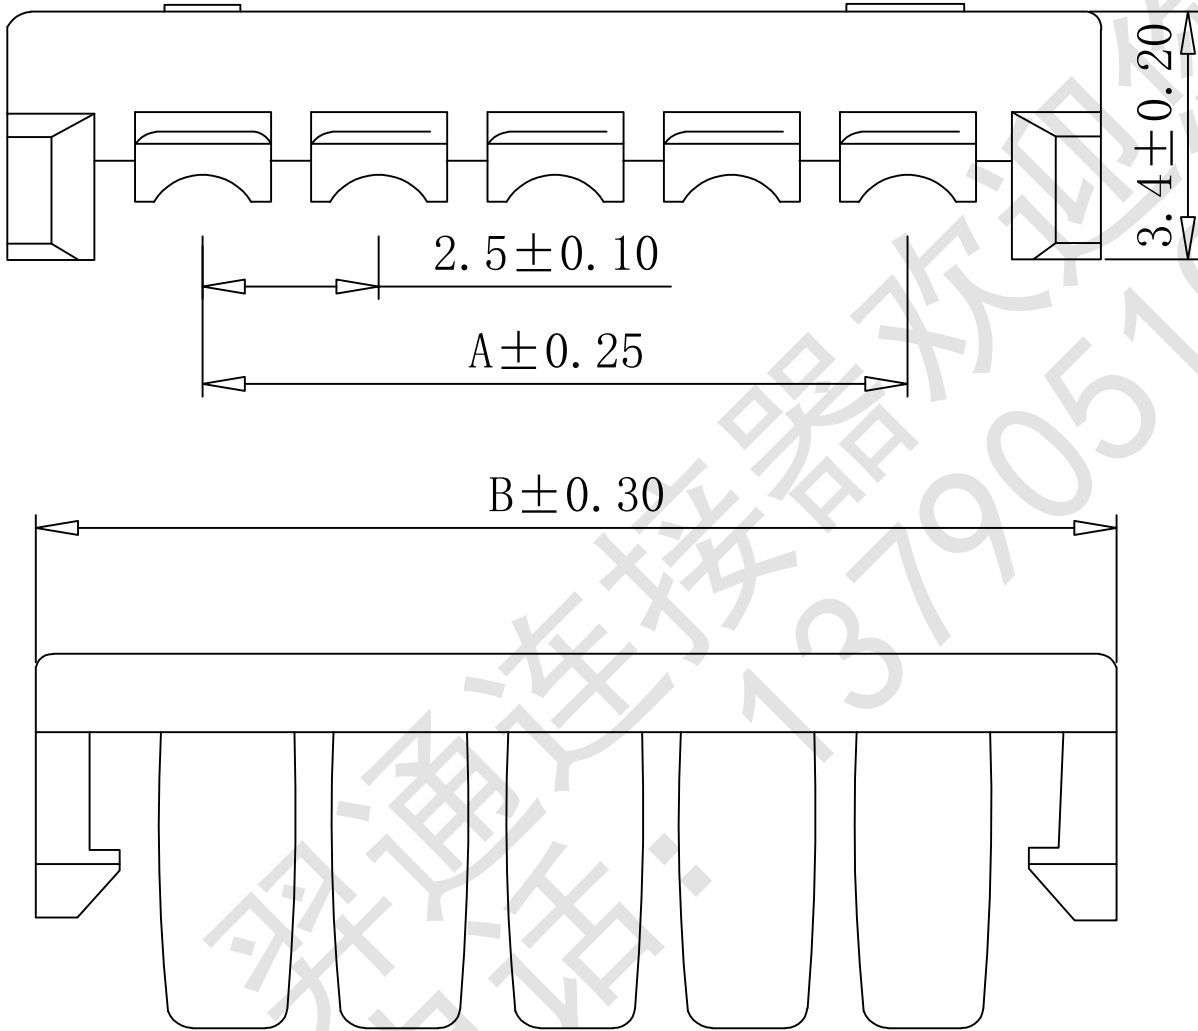

PIN	A	B
01	2.50	8.00
02	5.00	10.50
03	7.50	13.00
04	10.00	15.50
05	12.50	18.00
06	15.00	20.50
07	17.50	23.00
08	20.00	25.50
09	22.50	28.00
10	25.00	30.50
11	27.50	33.00
12	30.00	35.50
13	32.50	38.00
14	35.00	40.50
15	37.50	43.00

SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:3A AC/DC;
- Withstanding Voltage:1000V AC/minute
- Insulatin resistance:1000MΩ Min
- Temperature range:-25℃~+85℃
- Contact resistance:30mΩ Max


版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO:			
品名 TITLE: 2531尾塞			
材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2025. 6. 19

一般公差 GENERAL TOLERANCE	
X. X	±0.30
X. XX	±0.25
ANGLE	±1°



6

5

4

3

2

1

WLD

13790510059

5

4

3

2

1

F

E

D

C

B

A

F



E

D


C

B



A

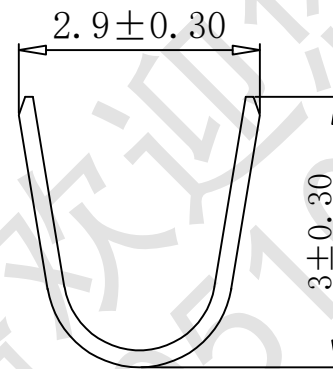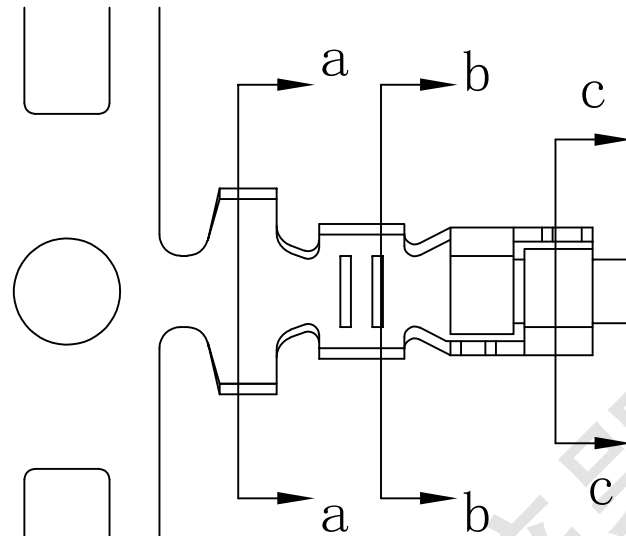


a-a SECTION

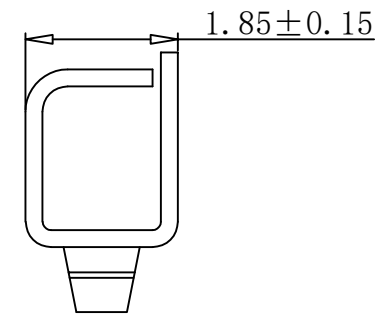

c-c SECTION

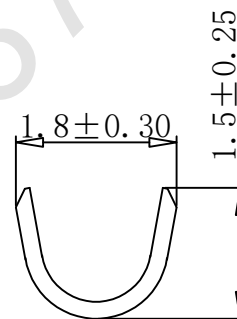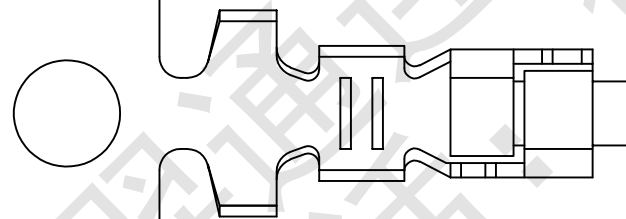

b-b SECTION

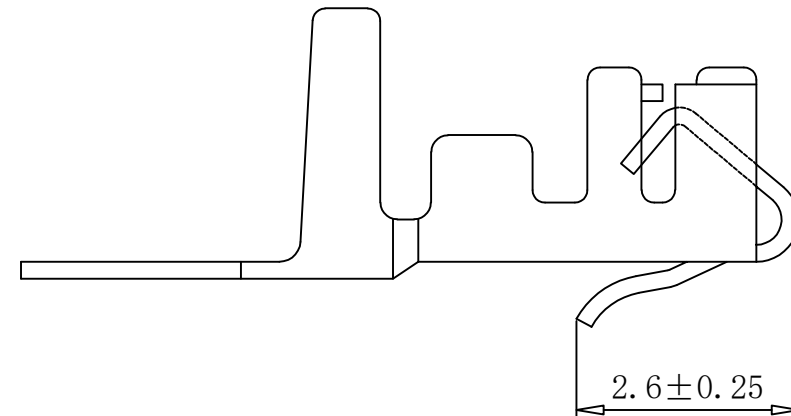

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 30mΩ Max
- Material: C5191



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2531TBX-2X-G

品名 TITLE: 2531-T

材料:

单位:

MM

包装规格:

比例:

1:1

制图:


审核:

核准:

日期:

2025. 6. 19

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°

版次
REVISION日期
DATE变更内容
DESCRIPTION核准
APPROVAL BY

WLD