

13790510059

5

4

3

2

1

F



E

D



C

B

A

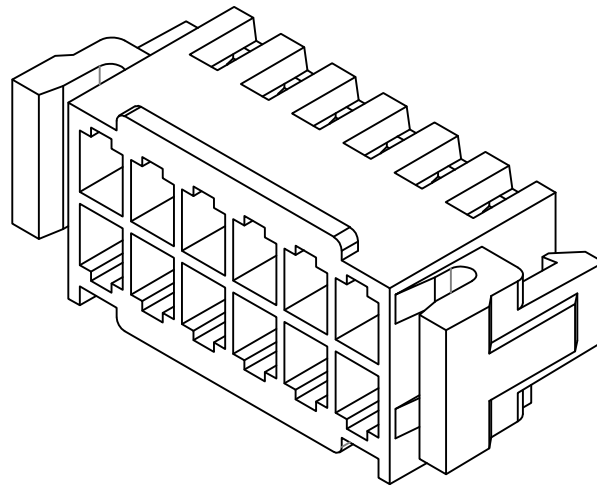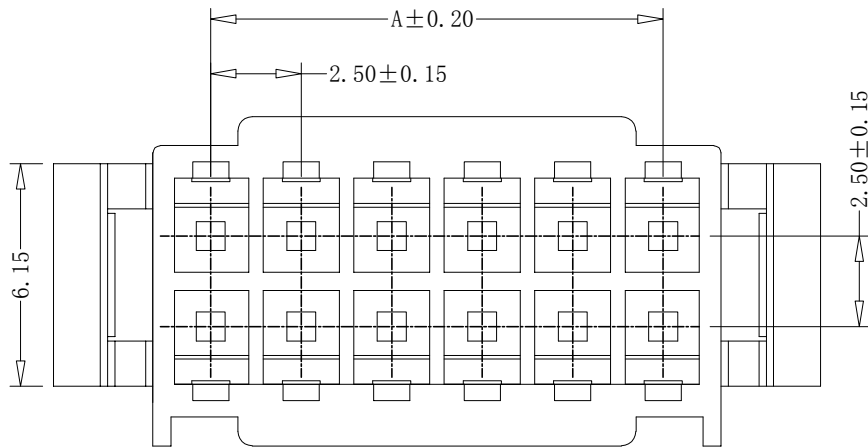

PIN	尺寸 (mm)		
	A	B	C
2*02	2.50	5.70	11.20
2*03	5.00	8.20	13.70
2*04	7.50	10.70	16.20
2*05	10.00	13.20	18.70
2*06	12.50	15.70	21.20
2*07	15.00	18.20	23.70
2*08	17.50	20.70	26.20
2*09	20.00	23.20	28.70
2*10	22.50	25.70	31.20
2*11	25.00	28.20	33.70
2*12	27.50	30.70	36.20
2*13	30.00	33.20	38.70
2*14	32.50	35.70	41.20
2*15	35.00	38.20	43.70

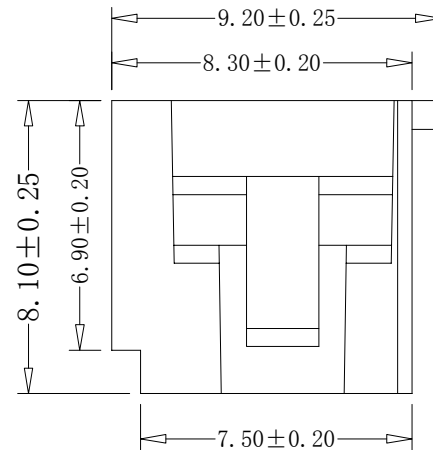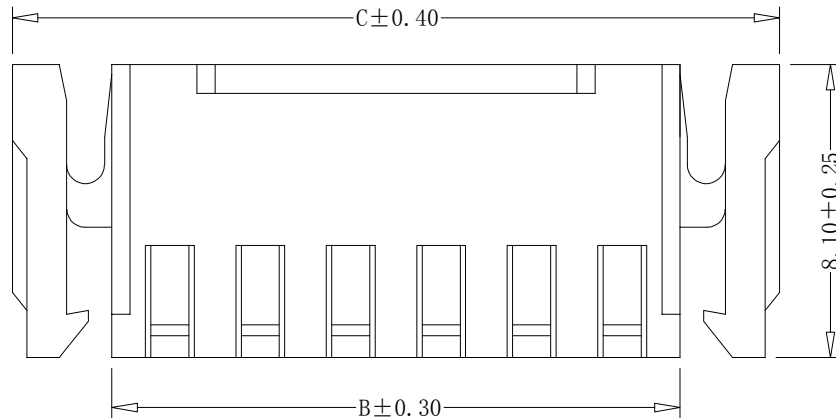

EST2532	H	-	1*NP	X	-	B	-	X	-	HF	-	NK	-	X
↑	↑		↑	↑		↑		↑		↑		↑		↑
异通代码+间距			PIN数	X本色 B黑色 R红色 L蓝色 Y黄色 G绿色 C透明		X普通 B带扣 C刺破 2L示意两侧带锁扣 U超薄防呆型 HV带高凸点 LC带低凸点 K卡槽 E有耳		X公胶壳 G母胶壳		HF示意无卤 NF普通含卤		NO MARK		A灼热丝750 B灼热丝850 X普通料
			1示意单排 2示意双排											
			H示意胶壳, H后无数字默认材质V0 H后带数字2示意材质V2											

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: PA66, UL94V-0

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号PART NO: EST2532H-2*NPX-B-X

品名 TITLE: 2532-H公双排(双勾)






材料: 单位: MM 包装规格: 比例: 1:1

审核: 核准: 日期: 2024. 5. 5

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.20
ANGLE ±1°



HY

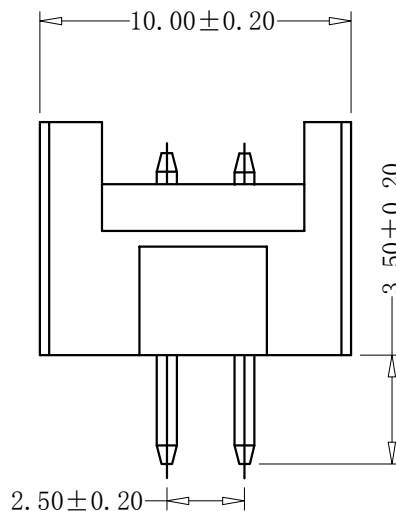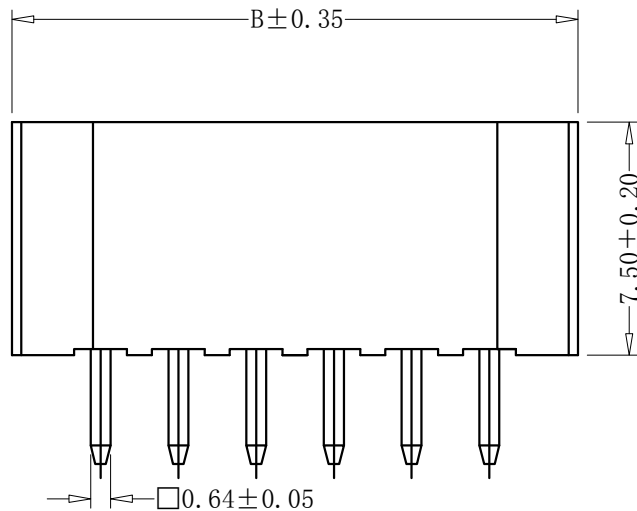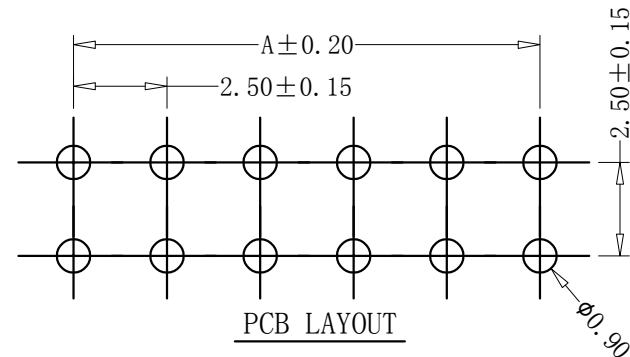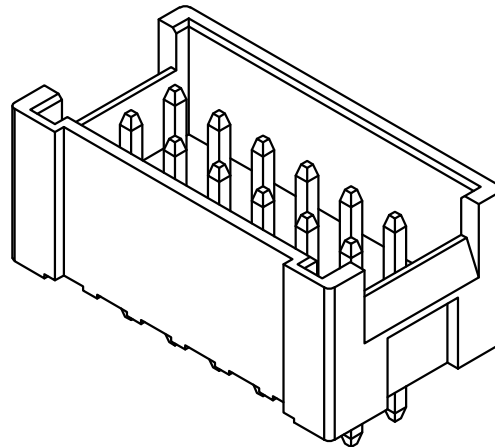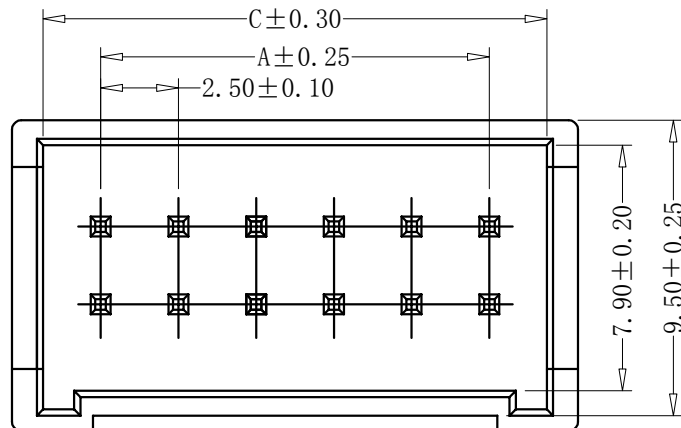

PIN	尺寸 (mm)			PIN	尺寸 (mm)		
	A	B	C		A	B	C
2*02	2.50	8.20	6.20	2*10	22.50	28.20	26.20
2*03	5.00	10.70	8.70	2*11	25.00	30.70	28.70
2*04	7.50	13.20	11.20	2*12	27.50	33.20	31.20
2*05	10.00	15.70	13.70	2*13	30.00	35.70	33.70
2*06	12.50	18.20	16.20	2*14	32.50	38.20	36.20
2*07	15.00	20.70	18.70	2*15	35.00	40.70	38.70
2*08	17.50	23.20	21.20				
2*09	20.00	25.70	23.70				

EST2532 W V - 2*NP X - 2 - X X - NK-HF

羿通代码+间距 V 示意180° 直针, VS 示意90° 弯针, RS 防呆, RG 高号 PIN 数 X 本色, B 黑色, R 红色, L 蓝色, Y 黄色, G 绿色 1 单排, 2 双排 X 普通, B 带扣, U 超薄, PH 组合排针, FH 组合排母, H 高弯, K 打脚, D 防呆型, 2 示意有柱, LO 带定位无K, KLO 带定位打K G 为PIN针镀金, S 为PIN针镀锡 1 为PPS, 2 为PBT, 3 为LCP, 4 为ABS, 5 为PA6T, 6 为PA66 NK 为NO MARK, MK 为有MARK HF 无卤, NF 普通含卤

W 示意针座, W 后无0默认材质为V0, W 后带2示意V2

SPECIFICATIONS

- Current Rating: 3A AC, DC
- Voltage Rating: 250V AC, DC
- Temperatuer Range: -25℃~+85℃
- Contact Resistance: 20mΩ Max
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltang: 1000V AC/minute
- Material: Wafer PA66, UL94V-0
PIN Brass Tin-plated

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2532WV-2*NPX-B

品名 TITLE: 2532直针(双勾)

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2024. 5. 5

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.20
ANGLE ±1°

