

13790510059




5

4

3

2

1

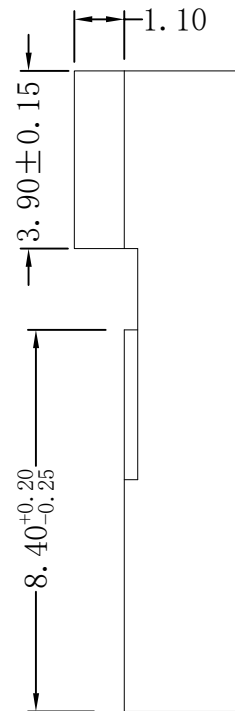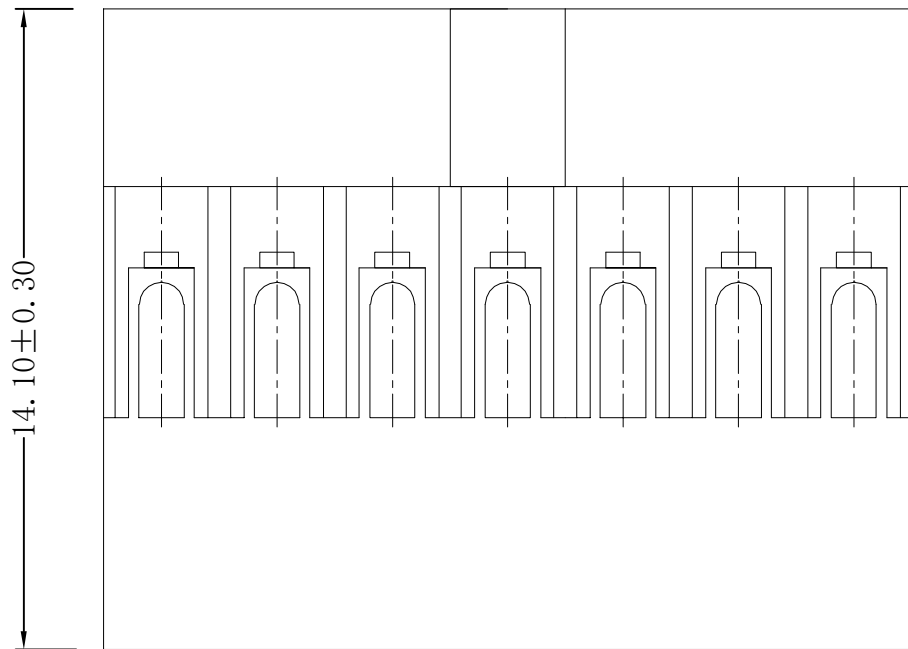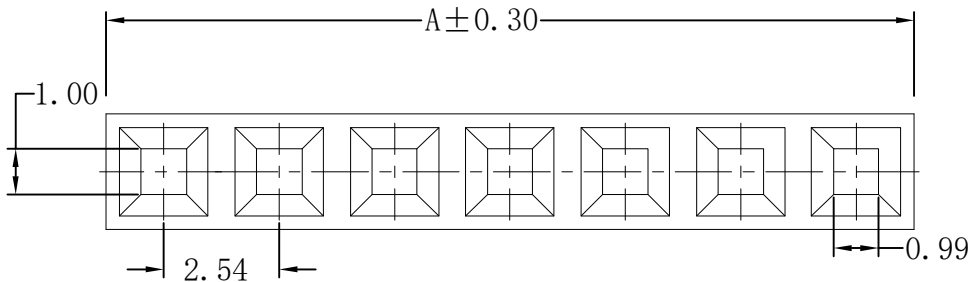

Poles	A	Poles	A
1*1	2.54	1*13	33.02
1*2	5.08	1*14	35.56
1*3	7.62	1*15	38.10
1*4	10.46	1*16	40.64
1*5	12.70	1*17	43.18
1*6	15.24	1*18	45.72
1*7	17.78	1*19	48.26
1*8	20.32	1*20	50.80
1*9	22.86	1*21	53.34
1*10	25.40	1*22	55.88
1*11	27.94	1*23	58.42
1*12	30.48	1*24	60.96

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 20mΩ Max
- Applicable wire:



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST2504H-1*NPB-X-X

品名 TITLE: DB2.54-H(单排)

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2019.4.30

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°



版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVAL BY

6

5

4

3

2

1

XJS