

13790510059




5

4

3

2

1

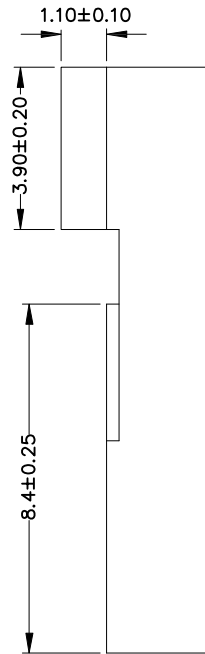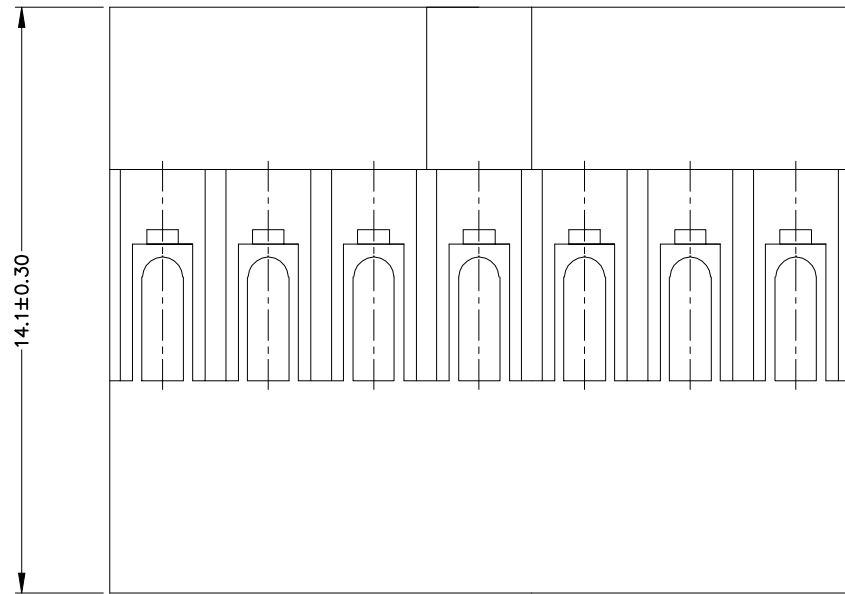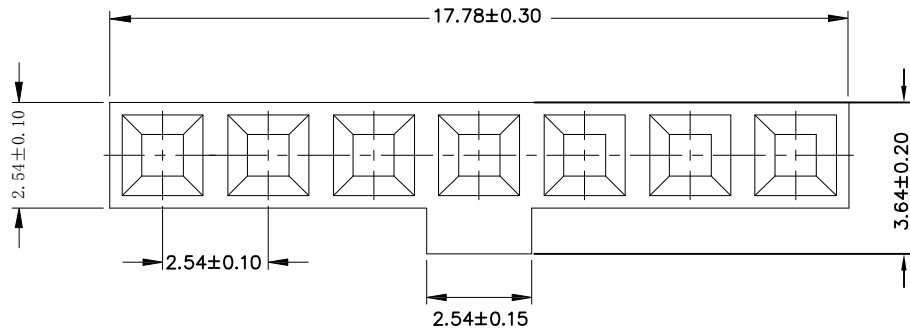

POLES	DIMENSION A(mm)	POLES	DIMENSION A(mm)
1X1	2.54	1X13	33.02
1X2	5.08	1X14	35.56
1X3	7.62	1X15	38.10
1X4	10.16	1X16	40.64
1X5	12.70	1X17	43.18
1X6	15.24	1X18	45.72
1X7	17.78	1X19	48.26
1X8	20.32	1X20	50.80
1X9	22.86	1X21	53.34
1X10	25.40	1X22	55.88
1X11	27.94	1X23	58.42
1X12	30.48	1X24	60.96

EST2504 H - 1*NP X - B - X - HF-NK - X

↑ 羿通代码+间距

↑ X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

↑ PIN数
1示意单排
2示意双排

↑ X普通
B带扣
C剥破
2L示意两侧带锁扣
U超薄防呆型
HV带高凸点
LC带低凸点
K卡槽
E有耳
NE无耳

↑ X公胶壳
G母胶壳

↑ NO MARK

↑ A灼热丝750
B灼热丝850
X普通料

↑ HF示意无卤
NF普通含卤

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 2.5A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 20mΩ Max

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2504H-1*NPB-LC

品名 TITLE: DB2.54-H(凸台)

材料: PPO

单位: MM

包装规格:

比例: 1:1

制图:


审核:

核准:

日期:

2023. 3. 11

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.20
ANGLE ±1°



XJS