


POLES	DIMENSION A(mm)	POLES	DIMENSION A(mm)
2X2	5.08	2X14	35.56
2X3	7.62	2X15	38.10
2X4	10.16	2X16	40.64
2X5	12.70	2X17	43.18
2X6	15.24	2X18	45.72
2X7	17.78	2X19	48.26
2X8	20.32	2X20	50.80
2X9	22.86	2X21	53.34
2X10	25.40	2X22	55.88
2X11	27.94	2X23	58.42
2X12	30.48	2X24	60.96
2X13	33.02	2X25	63.50

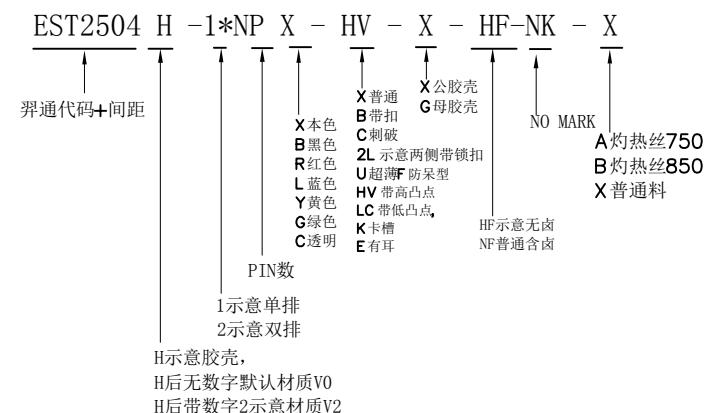

- SPECIFICATIONS
- Voltage rating:250V AC/DC;
 - Current rating:2.5A AC/DC;
 - Withstanding Voltage:800V AC/minute
 - Insulatin resistance:1000MΩ Min
 - Temperature range:-25°C ~+85°C
 - Contact resistance:20mΩ Max
 - Applicable wire:AWG#22~#28

				料号PART NO: EST2504H-2*NPB-HV				一般公差 GENERAL TOLERANCE
				品名 TITLE: DB2.54-H(双排高凸)				X. X ±0.30
				材料: MM 单位: MM 包装规格: 比例: 1:1				X. XX ±0.20
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	制图:	审核:	核准:	日期: 2023. 3. 18	ANGLE ±1°
6	5	4	3	2	1			XJS