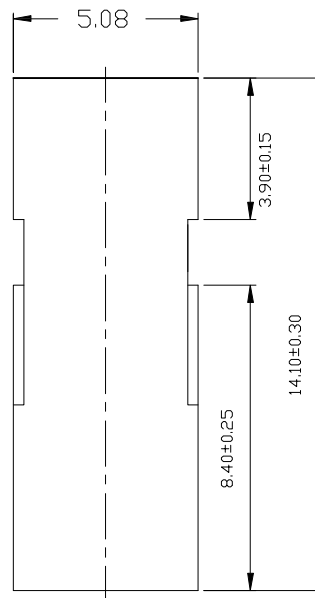
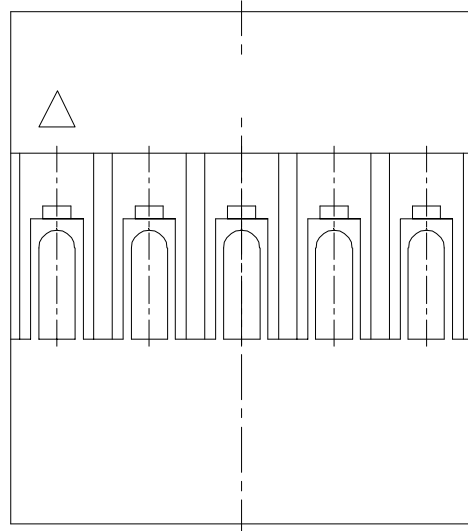
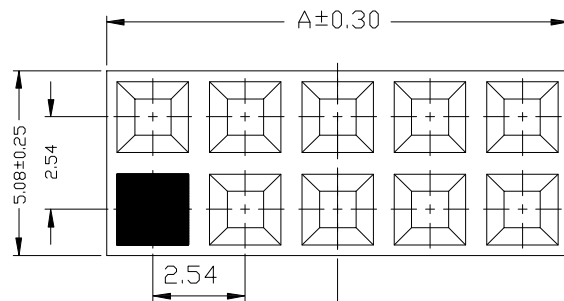


<i>POLES</i>	<i>DIMENSION</i>	<i>POLES</i>	<i>DIMENSION</i>
	<i>A(mm)</i>		<i>A(mm)</i>
<i>2X2</i>	<i>5.08</i>	<i>2X14</i>	<i>35.56</i>
<i>2X3</i>	<i>7.62</i>	<i>2X15</i>	<i>38.10</i>
<i>2X4</i>	<i>10.16</i>	<i>2X16</i>	<i>40.64</i>
<i>2X5</i>	<i>12.70</i>	<i>2X17</i>	<i>43.18</i>
<i>2X6</i>	<i>15.24</i>	<i>2X18</i>	<i>45.72</i>
<i>2X7</i>	<i>17.78</i>	<i>2X19</i>	<i>48.26</i>
<i>2X8</i>	<i>20.32</i>	<i>2X20</i>	<i>50.80</i>
<i>2X9</i>	<i>22.86</i>	<i>2X21</i>	<i>53.34</i>
<i>2X10</i>	<i>25.40</i>	<i>2X22</i>	<i>55.88</i>
<i>2X11</i>	<i>27.94</i>	<i>2X23</i>	<i>58.42</i>
<i>2X12</i>	<i>30.48</i>	<i>2X24</i>	<i>60.96</i>
<i>2X13</i>	<i>33.02</i>	<i>2X25</i>	<i>63.5</i>

[illegible]

SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:3A AC/DC;
- Withstanding Voltage:1000V AC/minute
- Insulatin resistance:1000M Ω Min
- Temperature range:-25℃~+85℃
- Contact resistance:20m Ω Max
- Applicable wire:AWG#22 TO #28

				料号PART NO: EST2504H-2*NPB-X-X				一般公差 GENERAL TOLERANCE X.X ±0.30 X.XX ±0.25 ANGLE ±1°
				品名 TITLE: DB2.54-H双排(塞1孔)				
				材料:	单位: MM	包装规格:	比例: 1:1	
日期版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	制图:	审核:	核准:	日期: 2022/7/13	 