

13790510059

5

4

3

2

F



E

D


C

B


A

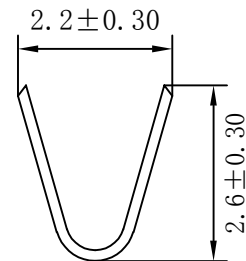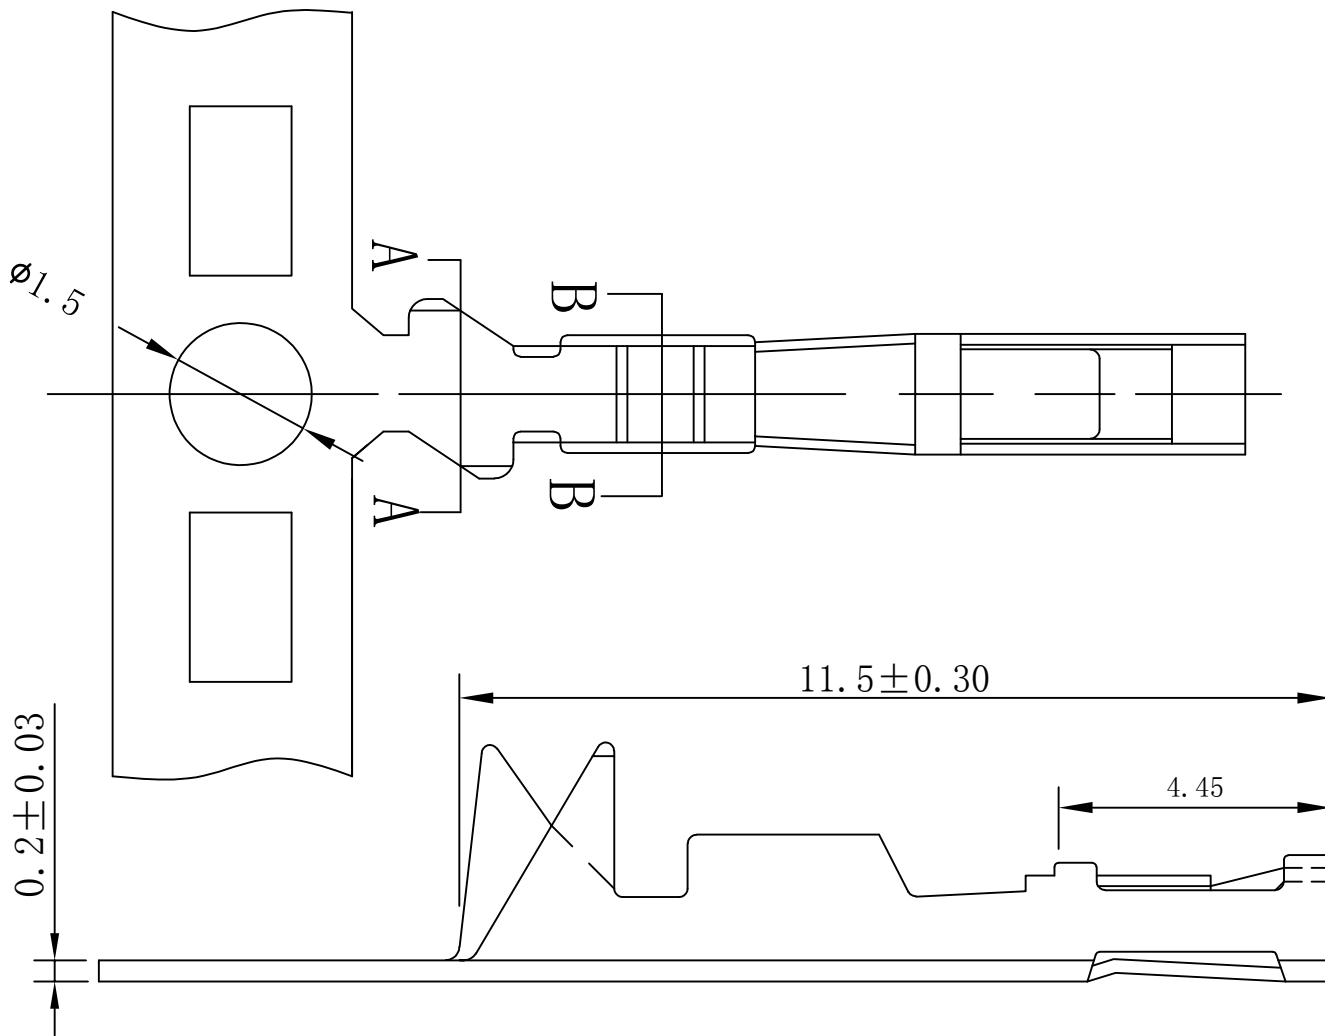

A-A SECTION



B-B SECTION



EST2504 T B X - 2 X- X

↑
昇通代码+间距

↑
T示端子

↑
X普通脚
H高脚
E增高型脚

↑
X普通
L长
S短
U超薄

0素材
2镀锡先冲后镀
3镀锡先镀后冲
4镀全镍(镀后冲)
4.2镀全镍先冲后镀
5G、15G示意镀金5U"或15U",
1G示意镀金1U"

↑
X公端
G母端
C示意90°
S示意180°

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 2.5A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 20mΩ Max
- Applicable wire: AWG#22 ~ #28

A1	2023. 9. 1	增加夹口尺寸0.48重点管控, PIN针与端子保持力仅作参考	陈 长 青	
A0	2008. 06. 12	新版发行	李 健	
版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY	制 图 LI



东莞市昇通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2504TBX-1GX-G

品 名 TITLE: 杜邦2.54-TC3

材料: C2680

单位: MM

包装规格: 10K/卷

比例: 1:1

审核: LI

核准: LI

日期: 2023/9/1

日期: 2023/9/1

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°



EST