

13780658042

5

4

3

2

F



E

D


C

B



A

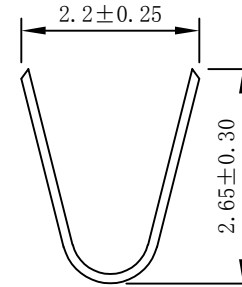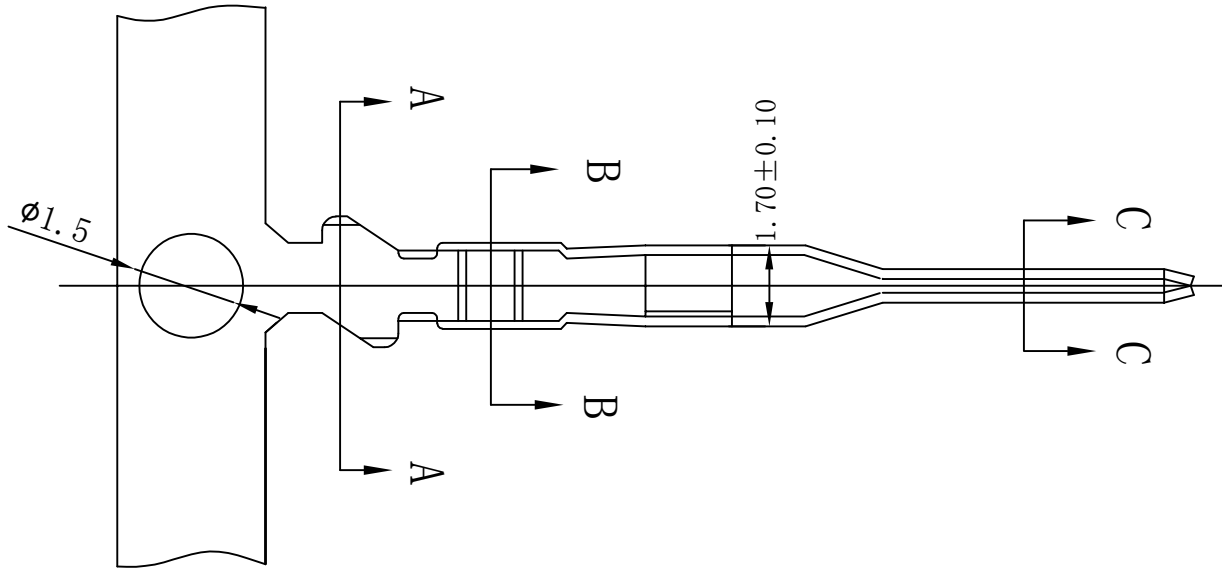

A-A SECTION

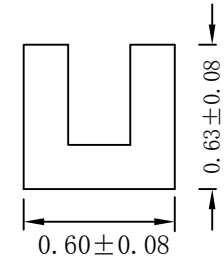

C-C SECTION

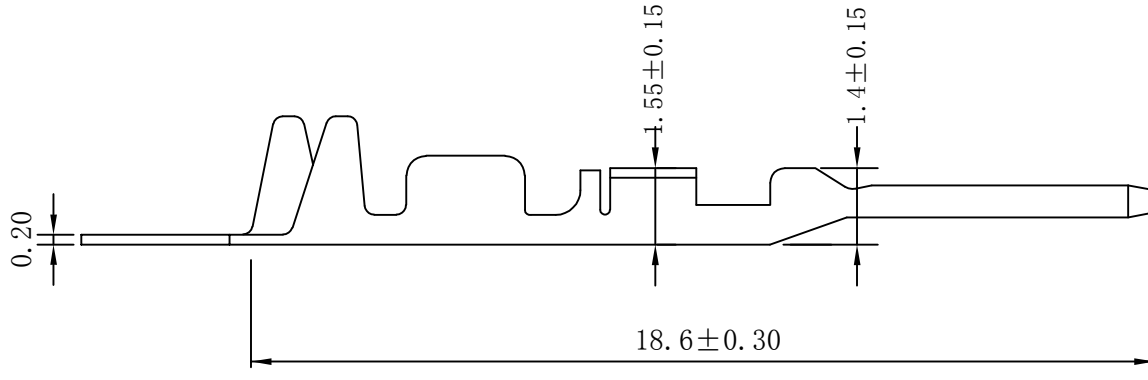

B-B SECTION

EST2504 T B X - 2 X - X					
↑	↑	↑	↑	↑	↑
羿通代码+间距	T示意端子	X普通脚 H高脚 E增高型脚	0素材 2镀锡先冲后镀 3镀锡先镀后冲 4镀全镍(镀后冲) X镀全镍先冲后镀 5G、15G示意镀金5U"或15U", 1G示意镀金1U"	X普通 L长 S短 U超薄	X公差 G母端 C示意90° S示意180°

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 2.5A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 20mΩ Max
- Applicable wire: AWG#22~#28



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2504TBX-2X-X

品名 TITLE: DB2.54-T公

材料: C2680

单位: MM

包装规格: 10K/卷

比例: 1:1

制图:


审核:

核准:

日期: 2023.3.14

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVALBY



EST