

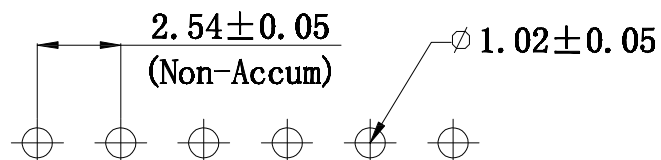
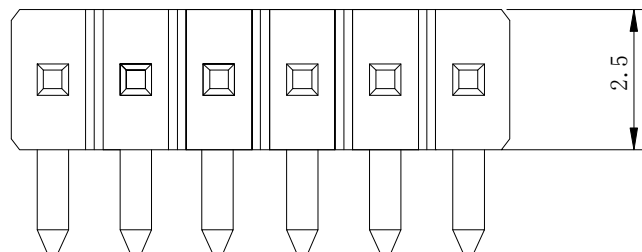


Plastic base

Type	size
H	2.5±0.15
A	6.0±0.25
B	4.3±0.20
C	3.0±0.20

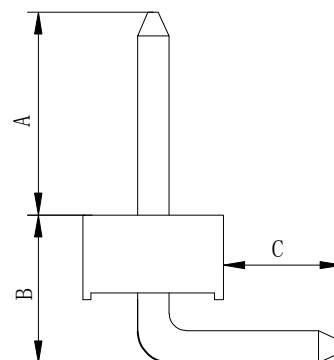

PCB LAYOUT

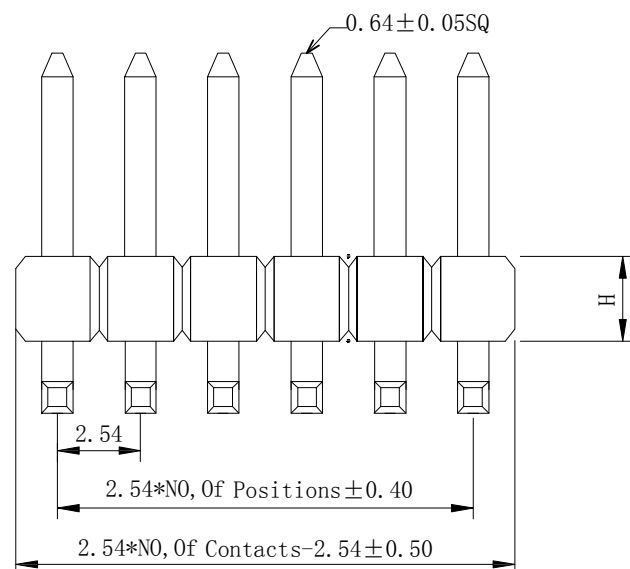

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 1.5A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 20mΩ Max
- Contactor Material: Brass
- Insulator Material: Pa6t
- Plating: Gold flash



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2504WR-1*NPB-X

品名 TITLE: DB2.54弯针 (单排)

材料: 黄铜

单位: MM

包装规格: 10K/卷

比例: 1:1


制图: 胡宗星

审核: 陈长青

核准: 李海平

日期: 2022/7/15

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±5°



日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY